

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 35, Townshi.p 40, Range 25, 4TH P.M.
STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
FOUND MONUMENT
AND ESTABLISHED G.P.S. COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 169419.06

Easting= 367264.08

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

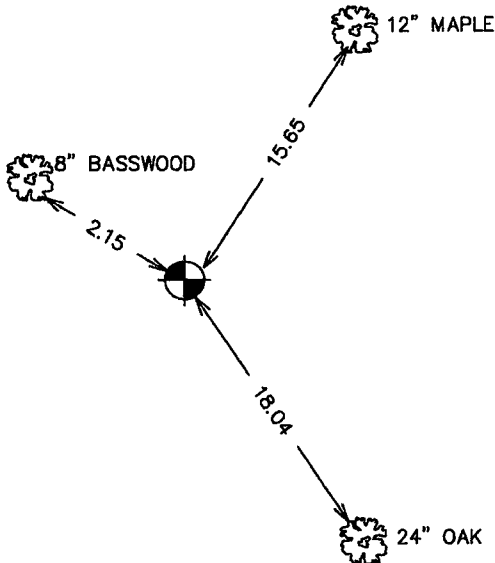

TIES ARE TO A SPK. IN
BLAZE IN NEAR FACE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data
contained herein was prepared by me or under
my direct supervision.

Ernest J. Rud
Signature

9-11-2006
Date

Registration No. Minn No 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Kanabec

I hereby certify that this document was filed in
the County Recorder's office at 8:00 A M. on the

13th day of Sept A.D., 2006

County Recorder Rhonda Olson

BY _____ Deputy

DOCUMENT NO. _____

NORTH QUARTER CORNER SECTION 35, T40, R25

STATEMENT OF EVIDENCE

ALL OF THE ORIGINAL GOVERNMENT BEARING TREES ARE NOW GONE.

NO RE-SURVEY DATA IS ON FILE FOR THIS CORNER.

IN JUNE OF 1996, M.B. RUDE MADE A SURVEY AROUND SECTION 35, TOWNSHIP 40, RANGE 25, TO LOCATE THE EXISTING MONUMENTS, LINES OF OCCUPATION AND ESTABLISH SEARCH AREAS.

M.B. RUDE SEARCHED AT THIS CORNER LOCATION BY PROBING WITH A MACHETTE AND USING A METAL LOCATOR. WE FOUND A 1 AND 1/4 INCH IRON PIPE AND ACCEPTED IT AS THE PERPETUATED CORNER LOCATION .

IN JULY 2006 E.G. RUD MADE A SURVEY AROUND SECTION 26, TOWNSHIP 40, RANGE 25 AND FOUND THIS MONUMENT AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION USING G.P.S. EQUIPMENT.