

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 5, Township 39, Range 24, 4TH P.M.  
 STATE OF MINNESOTA, County of KANABEC


At the corner location shown on the sketch:  
 SET #7 REBAR WITH ALUMINUM CAP  
 AND ESTABLISHED KANABEC COUNTY COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates  
 NAD 1983, HARN 1996 Adjustment  
 Obtained by RTK GPS Observation

Northing= 163823.46  
 Easting= 385740.46

Note: NAD 1983, HARN 1996 Adjustment  
 coordinates are NOT compatible with  
 NAD 1983 coordinates  
 Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

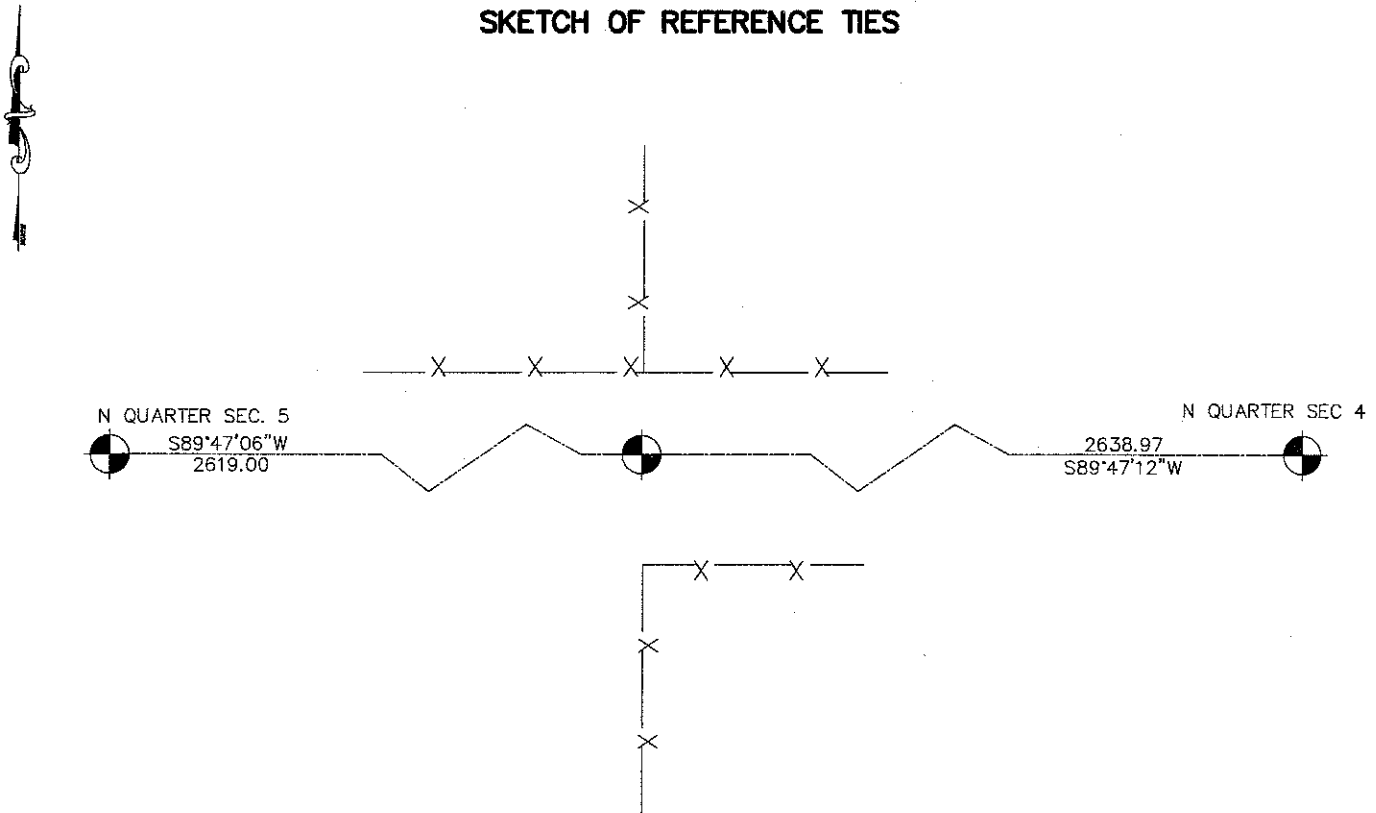

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest L. Rud 12-18-2007  
Signature Date

Registration No. 9808

Land Surveyor,     Professional Engineer  
 County Surveyor,     County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the County Recorder's office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_

BY \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

NORTHEAST CORNER SECTION 5, T39, R24

**STATEMENT OF EVIDENCE**

THE ORIGINAL CORNER WAS SET BY DEPUTY SURVEYOR SILAS BARNARD ON SEPTEMBER 22, 1849 AND BEARING TREES ESTABLISHED. NO VISIBLE EVIDENCE REMAINS TO THE CORNER OR BEARING TREES.

A SUBSEQUENT SURVEY DONE BY HANDSCHU IS RECORDED IN BOOK A1 OF SURVEYS, PAGE 56 & 57 AND THE DATE IS NOT GIVEN. IN THE NOTES HANDSCHU STATED THE NORTH QUARTER CORNER POST WAS IN AND DISTANCES MEASURED TO THE NORTHEAST CORNER OF SECTION 4.

IN MAY 2006 E.G. RUD AND SONS DID A SURVEY IN SECTION 33-40-24 AND LOCATED EXISTING MONUMENTATION AND LINES OF OCCUPATION. THIS CORNER FALLS ON THE CENTERLINE OF AN EAST-WEST GRAVEL ROAD AND A OLD FENCE LINE RUNNING SOUTH AND NORTH.

ON JULY 17, 2007 AN EXCAVATION WAS MADE USING THE COUNTY BACKHOE.

NO EVIDENCE COULD BE FOUND. THEREFORE A PRO-RATED DISTANCE FROM THE NORTH QUARTER CORNER OF SECTION 5 TO THE NORTHEAST CORNER OF SECTION 4, WAS USED FROM THE HANDSCHU SURVEY. THIS FIT WITHIN 2 ~~56~~ FEET OF HANDSCHU'S MEASUREMENT AND FIT THE FENCE NORTH AND SOUTH.

A #7 REBAR WITH AN ALUMINUM CAP WAS SET AND KANABEC COUNTY COORDINATES ESTABLISHED ON THIS LOCATION.