

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 03, Township 39, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:  
FOUND CAST IRON MONUMENT

Kanabec County U.S. Survey Feet Coordinates  
NAD 1983, HARN 1996 Adjustment  
Obtained by RTK GPS Observation


Northing= 161139.59

Easting= 396211.28

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

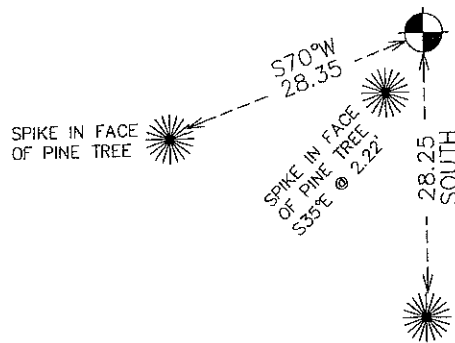

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Ernest G. Rud*  
Signature

12-23-10  
Date

Registration No. 9808

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

## OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the County Recorder's office at \_\_\_\_\_ M. on the \_\_\_\_\_

\_\_\_\_\_ day of \_\_\_\_\_ A.D., 20 \_\_\_\_\_

County Recorder \_\_\_\_\_

BY \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

E1/4 CORNER, SEC. 3, T39, R24

**STATEMENT OF EVIDENCE**

**THE ORIGINAL CORNER WAS SET BY DEPUTY SURVEYOR SILAS BARNARD IN SEPT. 1855 AND 2 BEARING TREES NOTED AS:**

**30" PINE @ 55 LINKS BEARING EAST  
24" PINE @ 35 LINKS BEARING S35°W**

**NO VISIBLE EVIDENCE REMAINS TODAY FOR THE CORNER OR THE BEARING TREES.**

**IN BOOK A, PAGE 148 A SURVEY BY VICKERY IS RECORDED DATED MARCH 15, 1898. VICKERY DOES NOT STATE WHAT WAS AT THIS CORNER AT THAT TIME.**

**A 3/4" IRON PIPE WAS FOUND BY GERALD SULLIVAN IN 1970 BY AN OLD FENCE CORNER. THIS PIPE WAS PROBABLY SET BY CHAS HANDSCHU IN HIS SURVEY OF MORA. GERALD SULLIVAN REPLACED THIS PIPE WITH A CAST IRON MONUMENT.**

**IN 2002, E.G. RUD AND SONS, INC. LOCATED THIS CAST IRON MONUMENT AND KANABEC COUNTY COORDINATES WERE ESTABLISHED ON THIS POSITION.**