

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 39, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

FOUND THIS MONUMENT
AND ESTABLISHED G.P.S. COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 150563.74

Easting= 390942.24

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

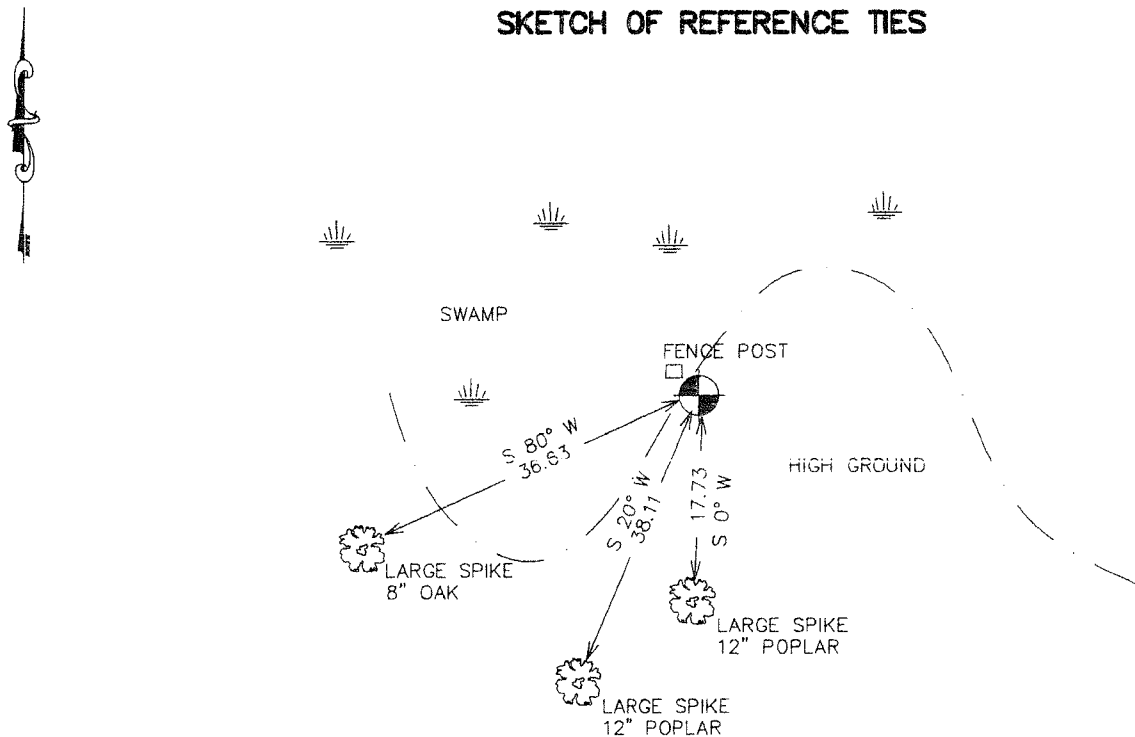

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Rud 1-03-2007
Signature Date

Registration No. Minn No 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

EAST QUARTER CORNER SECTION 16, T39, R24

STATEMENT OF EVIDENCE

ALL OF THE ORIGINAL BEARING TREES ARE NOW GONE.

IN 1902, THE FORMER COUNTY SURVEYOR, JOHN NELSON, MADE A SURVEY ALONG THE EAST LINE OF SECTION 16 AND FOUND THE GOVERNMENT QUARTER POST.

IN NOVEMBER OF 1988, M.B. RUDE MADE A SURVEY AROUND SECTION 16 AND OTHER ADJOINING SECTIONS TO LOCATE CORNER MONUMENTS AND ESTABLISH SEARCH AREAS.

ON OCTOBER 3, 1989 A SEARCH WAS MADE FOR THE ORIGINAL CORNER, BUT FOUND NOTHING.

ON OCTOBER 3, 1989, M.B. RUDE SET A 7/8" BY 36" CAPPED REBAR, AFTER ESTABLISHING THE CORNER BY SETTING IT ON A STRAIGHT LINE AND EQUAL DISTANCE BETWEEN THE NORTHEAST AND SOUTHEAST CORNERS OF SECTION 16.

IN FEBRUARY 2003 E.G. RUD AND SONS FOUND THIS MONUMENT, TOOK NEW TIES AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION.