

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 16, Township 38, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
On 03/06/2002 Set a Kanabec County Monument over Sandstone.
Monument is #7 rebar welded to #3 rebar braces 8 feet long set
in swamp. Aluminum cap on top.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 121823.000

Easting= 388231.223

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

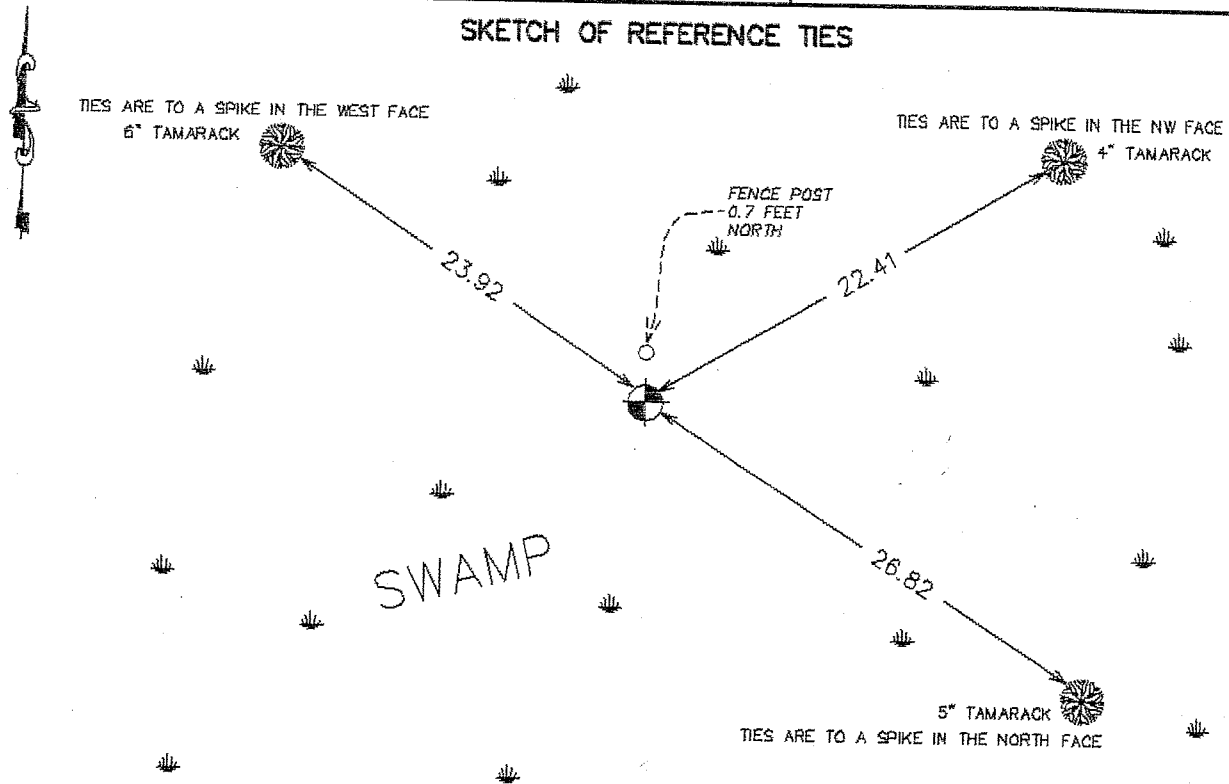

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data
contained herein was prepared by me or under
my direct supervision.

Ernest J. Reed
Signature

7-22-2003
Date

Registration No. 9800

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in
the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

Original corner was set in July 1855 by Silas Barnard.

No original bearing trees remain.

In April 1911 John Nelson, County Surveyor did a survey of Section 16 and placed a sandstone monument at the North Quarter corner.

In November 2001 we did a survey of Section 16 and found a sandstone with a chiseled "X" at the North Quarter corner which fit Nelsons distances within 2 feet. this sandstone was 8 inches under water in swamp.

On March 6, 2002 we set a 7/8 inch rebar with aluminum cap over the sandstone. We took 3 ties to monument and established County coordinates on March 2002.