

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 13, Township 39, Range 23, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

IN MARCH 2005 FOUND CAST IRON MONUMENT AND ESTABLISHED GPS COORDINATES.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 153098.47

Easting= 438270.58

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES FROM TIE SHEET 939

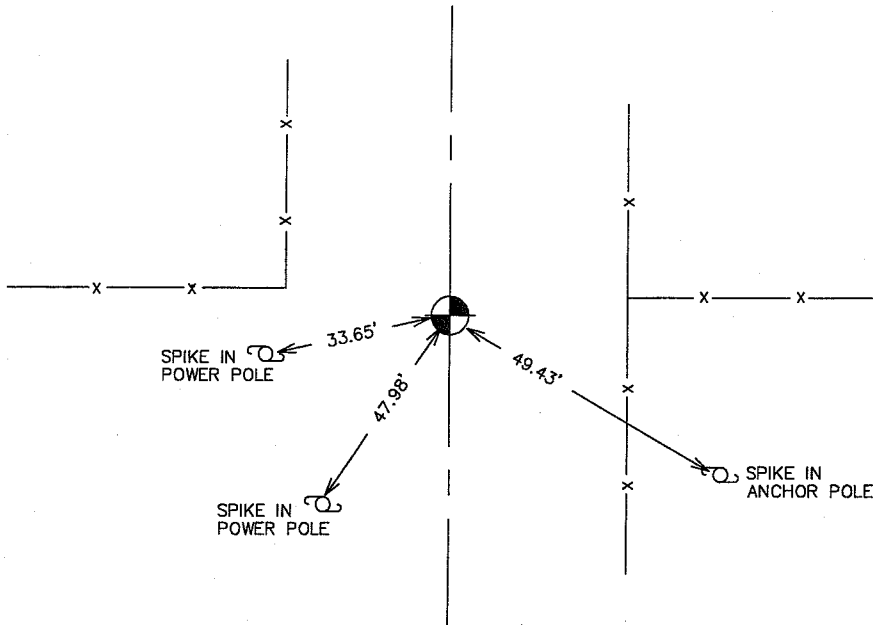

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Rud
Signature

11-09-2005
Date

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

Registration No. Minn No 9808

Land Surveyor, Professional Engineer

STATEMENT OF EVIDENCE

IN 1973 M.B. RUDE DUG A HOLE AT THE INTERSECTION OF FENCE LINES EAST AND WEST AND CENTER LINE OF NORTH-SOUTH ROADS.FOUND EVIDENCE OF OLD CHARRED WOOD BUT DID NOT FIND IRON OR STONE. SET CAST IRON MONUMENT AT THIS LOCATION.

IN MARCH 2005 E.G. RUD AND SONS FOUND THIS MONUMENT AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION USING GPS EQUIPMENT.