

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

..... NE Corner of Section 2 Township 39 Range 23 4th P.M.

STATE OF MINNESOTA, County of Kanabec

At the corner location shown on the sketch


[] On Date found a

[] left monument as found, [] lowered monument. [] removed monument (explain)

[X] On April 25, 1986 Date placed a 1" re-bar with an aluminum cap

SKETCH OF REFERENCE TIES

N

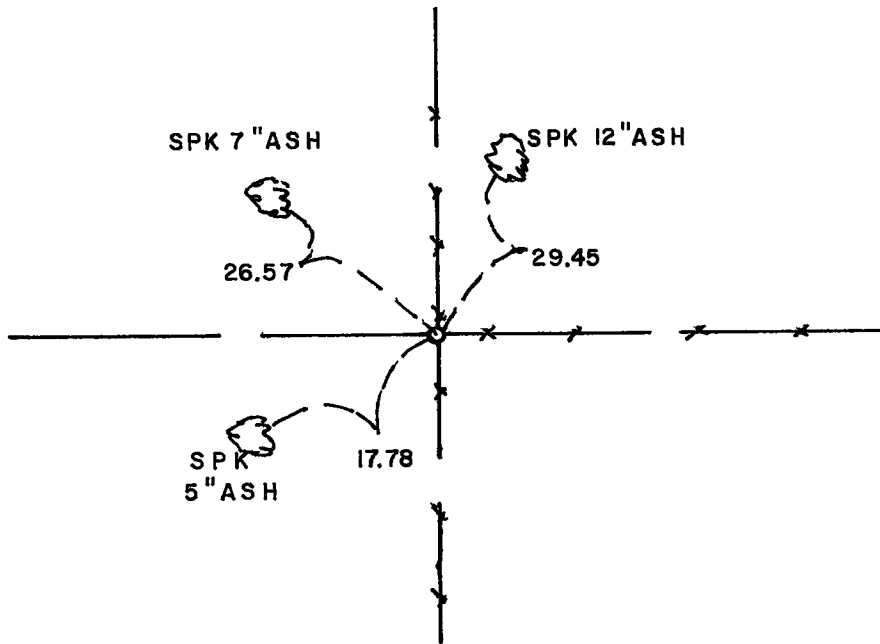

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Terrence H. Johnson Signature *8-15-86* Date

Registration No. *13115*

[X] Land Surveyor. [] Professional Engineer
[] County Surveyor. [] County Engineer

OFFICE OF THE COUNTY RECORDER

County of *Kanabec*

I hereby certify that this document was filed in the County Recorder's office at *10:15 A.* M. on the

18 day of *August* A.D., *1986*

County Recorder *Velma J. Besser*

By Deputy

DOCUMENT NO.

STATEMENT OF EVIDENCE

All Government ties are gone

Sugar	8"	N55°W	16 links
Sugar	8"	S15°W	18 links
Sugar	9°	S65°E	19 links
Birch	12"	N45°E	35 links

Resurvey Information

August 15, 1903 John Nelson, Surveyor, found this corner in place and established new ties: Black Ash 14" S27°30' W 18 links, Black Ash 8" S73°45' E 61 links.

I didn't find any evidence of the original corner or Nelson's bearing trees. I set a 1" re-bar with an aluminum cap at the intersection of fences which run north-south and east. I accepted the intersection of fences as the best evidence of the location of the original corner. The distance to the southeast corner is 5445.58 feet. Nelson measured 5459.52 feet.