

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHWEST Corner of Section 7, Township 42, Range 23, 4TH P.M.  
 STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:  
 FOUND A BROKEN ALUMINUM CAP MONUMENT, LAYING DOWN BY A  
 STANDING FENCE POST.  
 SET A 4' BY 1/2" IRON PIPE AT BASE POSITION OF BROKEN  
 MONUMENT AND REPLACED ALUMINUM CAP ON TOP.

Kanabec County U.S. Survey Feet Coordinates  
 NAD 1983, HARN 1996 Adjustment  
 Obtained by RTK GPS Observation


Northing= 251299.03  
 Easting= 397448.18

Note: NAD 1983, HARN 1996 Adjustment  
 coordinates are NOT compatible with  
 NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

NO TIES AVAILABLE IN SWAMP

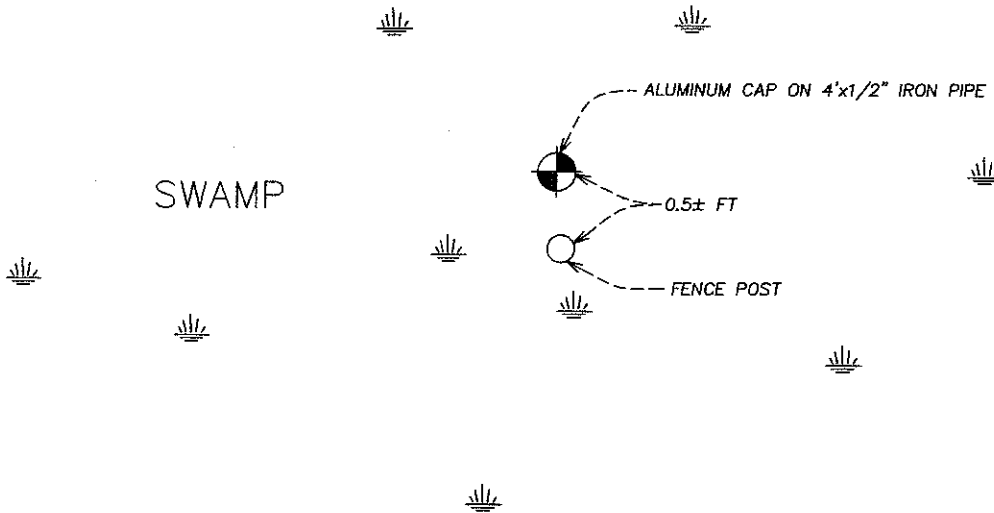

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data  
 contained herein was prepared by me or under  
 my direct supervision.

*Ernest Rud*  
 Signature

2-01-2008  
 Date

Registration No. 9808

Land Surveyor,      [ ] Professional Engineer

[ ] County Surveyor,      [ ] County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in  
 the County Recorder's office at \_\_\_\_\_ M. on the

\_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_

County Recorder \_\_\_\_\_

BY \_\_\_\_\_ Deputy

**DOCUMENT NO.** \_\_\_\_\_

NORTHWEST CORNER SECTION 7, TOWNSHIP 42, RANGE 23

**STATEMENT OF EVIDENCE**

THE ORIGINAL CORNER POST WAS SET BY DEPUTY SURVEYOR ISAAC A. BANKER ON DECEMBER 19, 1849 AND 4 BEARING TREES ESTABLISHED. NO EVIDENCE REMAINS FOR THE CORNER OR BEARING TREES.

(1974)

ON MARCH 22, 1974 M.B. RUDE SET A KANABEC COUNTY MONUMENT AT A SINGLE PROPORTIONATE MEASUREMENT BETWEEN THE NORTHWEST CORNER OF SECTION 6 AND THE SOUTHWEST CORNER OF SECTION 7.

(2007)

IN DECEMBER OF 2007 E.G. RUD AND SONS, INC. FOUND THIS MONUMENT. KANABEC COUNTY COORDINATES WERE ESTABLISHED USING GLOBAL POSITIONING SATELLITE (G.P.S.) EQUIPMENT.