

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

\_\_\_\_\_ SOUTHWEST \_\_\_\_\_ Corner of Section 7, Township 42, Range 23, 4TH P.M.  
STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

FOUND A 1" IRON PIPE RUSTED AND LEANING ALSO FOUND A POSSIBLE STONE BURIED IN SWAMP ALONG SIDE THE 1" IRON

SET 4' BY 1/2" IRON PIPE AND ALUMINUM CAP ON NORTH EDGE OF EXISTING 1" IRON PIPE LEFT UP 1'± WITH A FENCE POST WITNESS SET JUST SOUTH OF THE 1/2" SET, LEFT UP 3' AND ESTABLISHED KANABEC COUNTY COORDINATES ON ITS LOCATION

Kanabec County U.S. Survey Feet Coordinates  
NAD 1983, HARN 1996 Adjustment  
Obtained by RTK GPS Observation

Northing= 246063.90


Easting= 397479.71

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

NO TIES AVAILABLE IN SWAMP

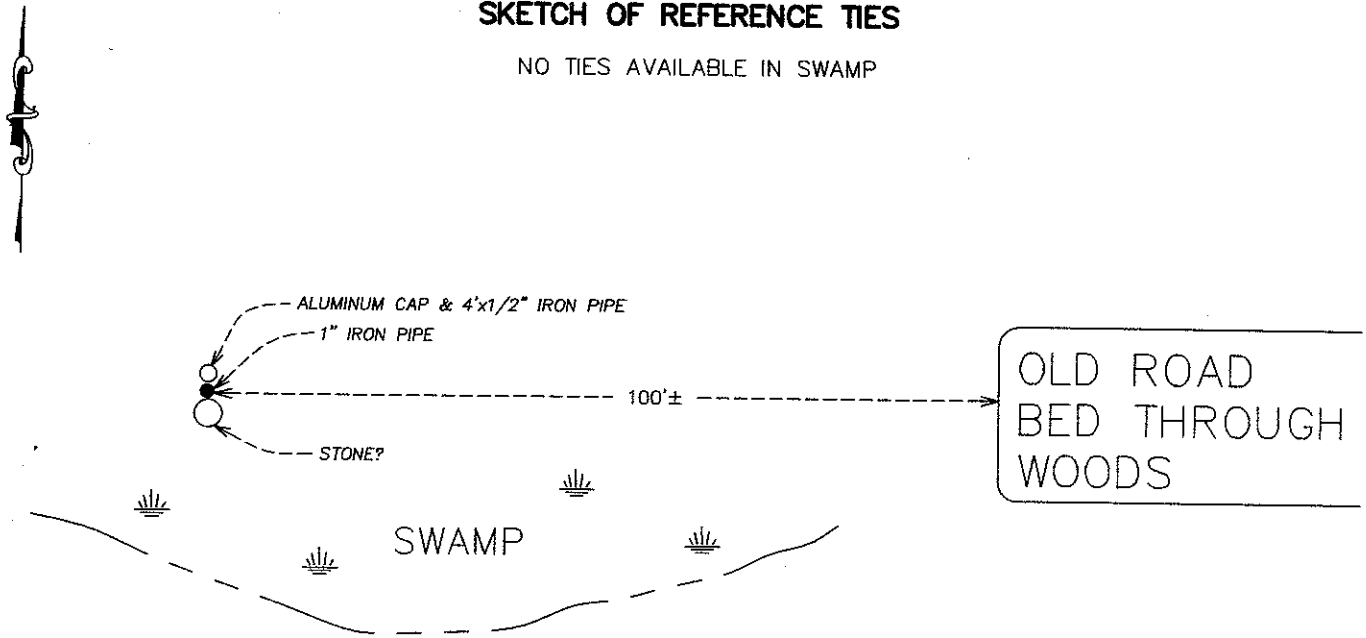

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Blud  
Signature

2-01-2008  
Date

Registration No. 9808

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

## OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the County Recorder's office at \_\_\_\_\_ M. on the

\_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_

County Recorder \_\_\_\_\_

BY \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

SOUTHWEST CORNER SECTION 7, TOWNSHIP 42, RANGE 23

**STATEMENT OF EVIDENCE**

THE ORIGINAL POST WAS SET BY DEPUTY SURVEYOR ISAAC A. BANKER ON DECEMBER 19, 1849 AND 4 BEARING TREES. NO VISIBLE EVIDENCE REMAINS FOR THE CORNER OR BEARING TREES. NO EVIDENCE COULD BE FOUND FOR THE CORNER OR BEARING TREES. NO RECORDS OF ANY SUBSEQUENT SURVEYS COULD BE FOUND AT KANABEC COUNTY OFFICES. NO ROAD OPENINGS ARE FILED EITHER.

(1909)

IN BOOK A1 OF SURVEYS, PAGES 14 AND 15 JOHN NELSON RECORDED A SURVEY OF SECTION 13, TOWNSHIP 42, RANGE 24, BUT DID NOT FIND OR SET THIS NORTHEAST CORNER OF SECTION 13 ON APRIL 5TH, 1909.

(1970's)

IN THE 1970's NORM HOIUM RAN A SURVEY ALONG THE NORTH LINE OF SECTION 18, TOWNSHIP 42, RANGE 23 AND SET AN IRON MONUMENT IN THE SWAMP 100± FEET WEST OF THE IMPROVED EAST-WEST ROAD.

(2007)

IN DECEMBER OF 2007 E.G. RUD AND SONS, INC. RAN A SURVEY AROUND SECTION 7, TOWNSHIP 42, RANGE 23 AND FOUND A 1 INCH IRON PIPE IN THE SWAMP AND THIS WAS WITHIN 2 FEET OF THE DISTANCE MEASURED BY NORM HOIUM. WE ACCEPTED THIS IRON AS THE BEST EVIDENCE FOR THE LOCATION OF THIS CORNER AND SET A 4 FOOT PIPE WITH AN ALUMINUM CAP ON TOP. KANABEC COUNTY COORDINATES WERE ESTABLISHED USING GLOBAL POSITIONING SATELLITE (G.P.S.) EQUIPMENT.