

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 12, Township 42, Range 24, 4TH P.M.  
STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:  
FOUND A BROKEN ALUMINUM CAP MONUMENT, LAYING DOWN BY A STANDING FENCE POST.  
SET A 4' BY 1/2" IRON PIPE AT BASE POSITION OF BROKEN MONUMENT AND REPLACED ALUMINUM CAP ON TOP.

Kanabec County U.S. Survey Feet Coordinates  
NAD 1983, HARN 1996 Adjustment  
Obtained by RTK GPS Observation  
Northing= 251299.03  
Easting= 397448.18  
Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates  
Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

NO TIES AVAILABLE IN SWAMP

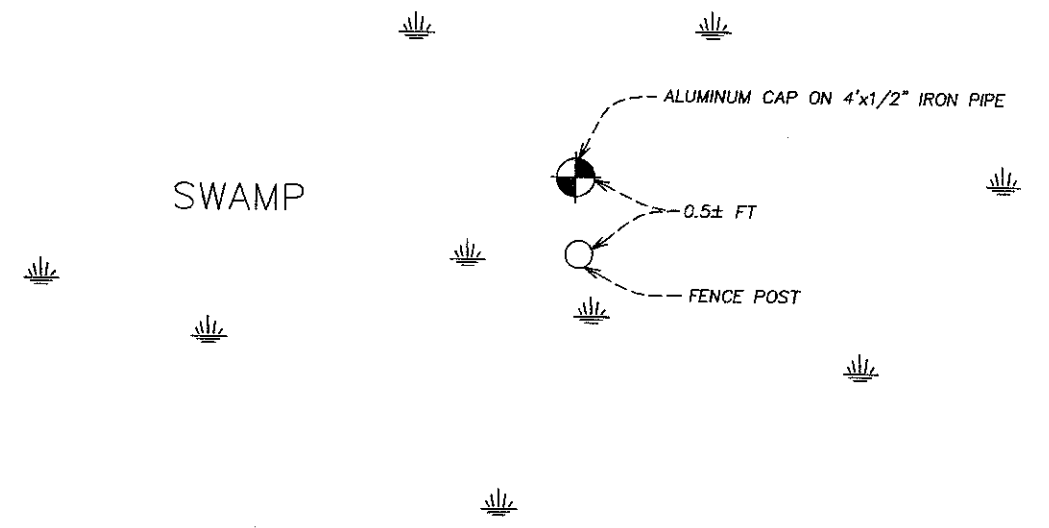

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Reed  
Signature

2-04-2008  
Date

Registration No. 9808

- Land Surveyor,      [ ] Professional Engineer  
[ ] County Surveyor,    [ ] County Engineer

## OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the County Recorder's office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_  
BY \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

NORTHEAST CORNER SECTION 12, TOWNSHIP 42, RANGE 24

**STATEMENT OF EVIDENCE**

THE ORIGINAL CORNER POST WAS SET BY DEPUTY SURVEYOR ISAAC A. BANKER ON DECEMBER 19, 1849 AND 4 BEARING TREES ESTABLISHED. NO EVIDENCE REMAINS FOR THE CORNER OR BEARING TREES.

(1974)

ON MARCH 22, 1974 M.B. RUDE SET A KANABEC COUNTY MONUMENT AT A SINGLE PROPORTIONATE MEASUREMENT BETWEEN THE NORTHWEST CORNER OF SECTION 6 AND THE SOUTHWEST CORNER OF SECTION 7.

(2007)

IN DECEMBER OF 2007 E.G. RUD AND SONS, INC. FOUND THIS MONUMENT. KANABEC COUNTY COORDINATES WERE ESTABLISHED USING GLOBAL POSITIONING SATELLITE (G.P.S.) EQUIPMENT.