

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 22, Township 42, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

FOUND THIS MOUMENT AND ESTABLISHED G.P.S. COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation

Northing= 240962.71


Easting= 386756.42

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

Q S.H. # 27

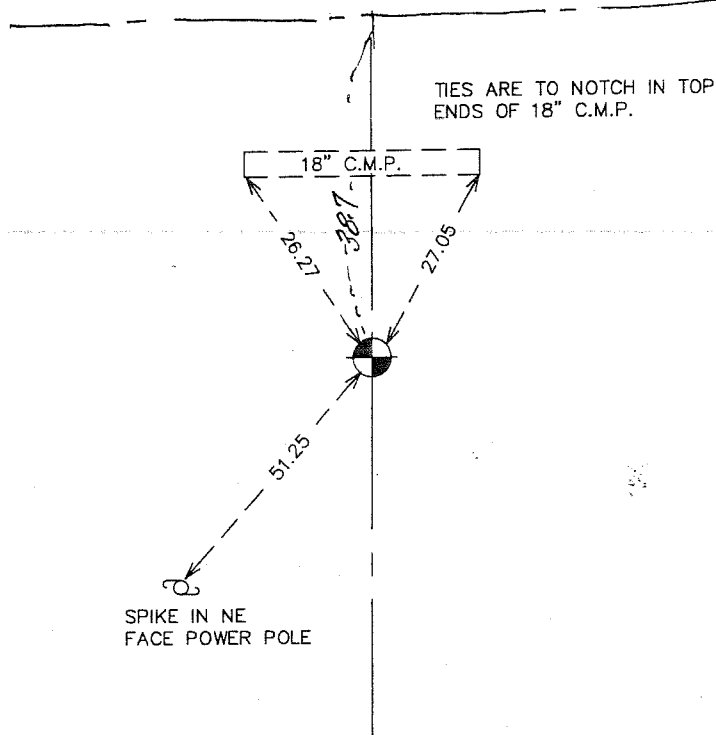

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Signature _____ Date _____

Registration No. _____

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the _____ day of _____ A.D., 20____

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

NORTHEAST CORNER SECTION 22, T42, R24

STATEMENT OF EVIDENCE

ALL OF THE ORIGINAL BEARING TREES ARE NOW GONE.

THE MINNESOTA DEPARTMENT OF TRANSPORTATION MAPS AND NOTES SHOW THIS CORNER WAS ASSUMED AT THE INTERSECTION OF EXISTING ROADS IN THEIR SURVEY FOR STATE HIGHWAY NO. 27 AT A POINT 38.7 FEET SOUTH OF THE PROPOSED CENTER LINE OF HIGHWAY NO. 27.

IN MAY OF 1988, M.B. RUDE LOCATED THE RIGHT OF WAY OF THE DEPARTMENT OF TRANSPORTATION ON HIGHWAY #27 AND SET THIS CORNER PER THE RECORDS 38.7 FEET SOUTH OF THE CENTERLINE OF HIGHWAY #27. NO EXCAVATION WAS MADE AS ALL EVIDENCE WAS DESTROYED IN CONSTRUCTION OF STATE HIGHWAY NO. 27.

IN DECEMBER 2006 E.G. RUD AND SONS FOUND THIS MONUMENT AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS LOCATION USING G.P.S. EQUIPMENT.