0=0===0 · ==					
CERTIFICATE	OF	LOCATION	OF	GOVERNMENT	CORNER

EAST QUARTER Corner of Section 30, Township 42 , Range 24 , 4TH P.M. STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch: SET #7 REBAR WITH ALUMINUM CAP


Kanabec County U.S. Survey Feet Coordinates NAD 1983, HARN 1996 Adjustment Obtained by RTK GPS Observation

Northing= 232706.41 Easting=<u>370354.16</u>

Note: NAD 1983, HARN 1996 Adjustment coordinates are NOT compatible with NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

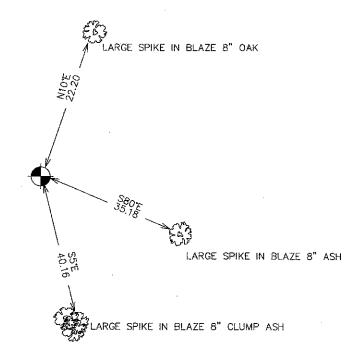

Statement of evidence relative to this corner location is on back of page.

! hereby	certify	that	this	docui	men	t a	nd	the	data
containe				pared	bу	me	or	und	er
my direc	t super	vision							
(_	~					

Registration No. 980

Professional Engineer Land Surveyor,

[] County Surveyor, [] County Engineer

OFFICE OF THE COUNTY RECORDER

County of I hereby certify that this document was filed in the County Recorder's office at M. on the _____day of_______A.D., 20____ County Recorder____

BY

DOCUMENT NO. ____

EAST QUARTER CORNER SECTION 30, T42, R24

STATEMENT OF EVIDENCE

THE ORIGINAL CORNER POST WAS SET BY DEPUTY SURVEYOR ISAAC BANKER ON DECEMBER 17, 1855 AND 2 SUGAR MAPLES WERE USED AS BEARING TREES.— NO VISIBLE EVIDENCE REMAINS FOR THE CORNER OR BEARING TREE.

NO SUBSEQUENT SURVEYS COULD BE FOUND THAT USED THIS CORNER AT THE KANABEC COUNTY OFFICES.

IN OCTOBER 2006 E.G. RUD AND SONS RAN A SURVEY AROUND SECTIONS 28, 29, 30, 31, 32 AND 33. NO LINE OF OCCUPATION COULD BE FOUND WITHIN 200 FEET.

THEREFORE THIS CORNER WAS SET BY SINGLE PROPORTIONATE MEASUREMENT AND ON LINE BETWEEN THE NORTHEAST AND SOUTHEAST CORNERS OF SECTION 30. A #7 REBAR WITH AN ALUMINUM CAP WAS SET, REFERENCE TIES TAKEN AND KANABEC COUNTY COORDINATES ESTABLISHED ON THIS POSITION.