

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 11, Township 41, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
SET A 1/2" BY 42" IRON PIPE WITH ALUMINUM CAP, UP 1.5± FT.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 218358.64

Easting= 391547.67

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

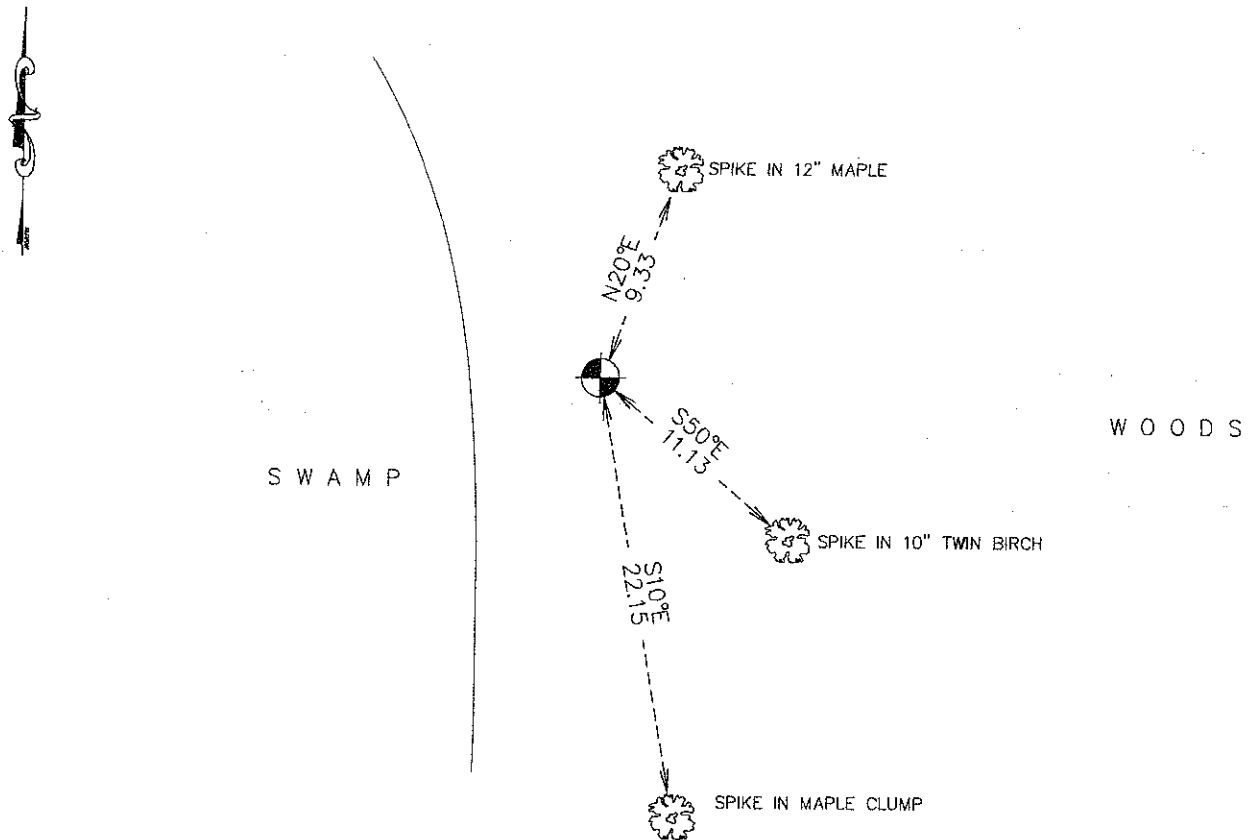

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Reed
Signature

12-21-2011
Date

Registration No. 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

NE CORNER, SEC. 11, T41, R24

STATEMENT OF EVIDENCE

THE ORIGINAL CORNER WAS SET ON DECEMBER 24, 1855 BY U.S. DEPUTY SURVEYOR ISAAC BANKER AND 4 BEARING TREES NOTED AS:

10" TAMARACK @ 17 LINKS BEARING N30°E

6" ASPEN @ 25 LINKS BEARING N70°W

7" ASPEN @ 31 LINKS BEARING S60°W

6" BALSAM @ 23 LINKS BEARING S40°E

NO VISIBLE EVIDENCE COULD BE FOUND FOR THE ORIGINAL CORNER OR BEARING TREES.

NO RECORDS OF ANY SUBSEQUENT SURVEYS COULD BE FOUND AT THE KANABEC COUNTY OFFICES.

IN DECEMBER 2011, E.G. RUD AND SONS RAN A SURVEY AROUND SECS. 1, 2, 11 AND 12. THIS CORNER FALLS ON THE EDGE OF A SWAMP IN A WOODED AREA. NO SIGNS OF OCCUPATION ARE APPARENT.

THEREFORE, WE TREATED THIS AS A LOST CORNER AND SET IT BY DOUBLE PROPORTION BETWEEN THE NE CORNER OF SEC. 10 AND THE NE CORNER OF SEC. 12 AND BETWEEN THE NE CORNER OF SEC. 2 AND THE E1/4 CORNER OF SEC. 11. A 1/2" BY 42" IRON PIPE WITH AN ALUMINUM CAP WAS SET, TIES WERE TAKEN AND KANABEC COUNTY COORDINATES WERE ESTABLISHED ON THIS POSITION. A STEEL "U" POST IS 1.5± NORTH OF THIS CORNER.