

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 26, Township 39, Range 25, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
ON 1/19/2004, SET A #7 REBAR 24" LONG WITH AN ALUMINUM CAP

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 140189.56

Easting= 369933.20

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

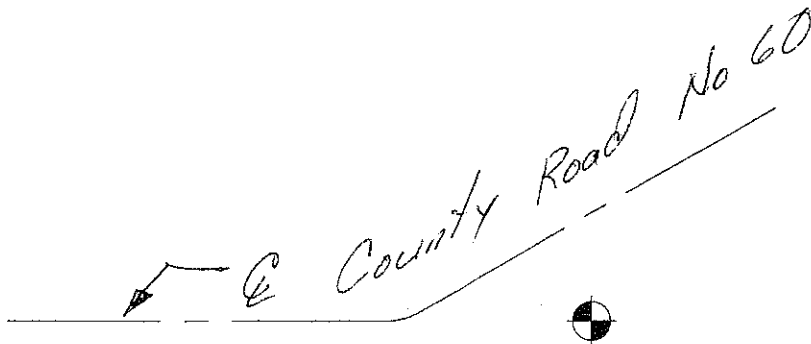

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest Blud
Signature

12-21-2011
Date

Registration No. 9808

Land Surveyor, [] Professional Engineer

[] County Surveyor, [] County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20__

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

E1/4 CORNER, SEC. 26, T39, R25

STATEMENT OF EVIDENCE

THE ORIGINAL GOVERNMENT POST WAS SET BY U.S. DEPUTY SURVEYOR SILAS BARNARD AND 2 BEARING TREES NOTED AS:

8" WHITE OAK @ 34 LINKS BEARING S10°W

8" POPLAR @ 30 LINKS BEARING N70°E

NO EVIDENCE REMAINS TODAY FOR THE CORNER OR BEARING TREES.

NO RECORDS OF OTHER SUBSEQUENT SURVEYS COULD BE FOUND AT THE KANABEC COUNTY OFFICES.

A ROAD OPENING IS ON FILE AT THE COUNTY AUDITOR'S OFFICE ALONG THE EAST-WEST QUARTER LINE OF SEC. 26. NO SURVEY WAS RECORDED WITH THIS OPENING.

THEREFORE, ON JANUARY 19, 2004, E.G. RUD AND SONS SRT A # 7 REBAR BY LOST METHODS, TOOK TIES AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION.