

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 31, Township 39, Range 25, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

Set 1/2" iron pipe with cap #9808


Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation

Northing= 139002.72
Easting= 345954.56

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

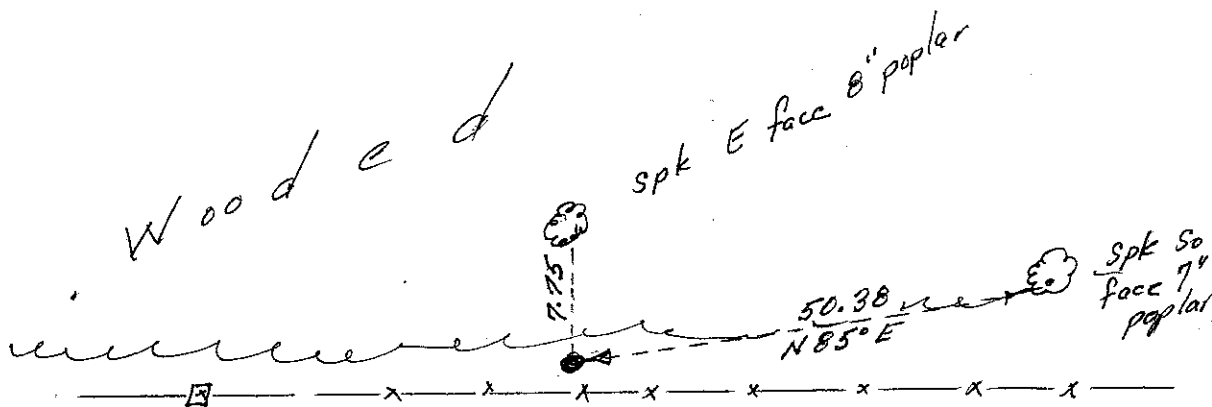

Logged Area

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Rud 7-11-12
Signature Date

Registration No. Minn No. 9808

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20__

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE: NORTH ¼ 31-39-25 3925116

The original government post was set on July 6, 1855 and ^{two}~~ten~~ bearing trees noted as:

12" Black Ash bearing North 20 degrees East at 15 links

10" Basswood bearing South 20 degrees West at 20 links

No evidence for the corner or accessories could be found. On pages 294 and 295 of Surveys I Book A, John Nelson recorded a survey of Section 31 and noted a post at this corner. No evidence could be found for the post or ties.

On July 11, 2002, E.G. Rud & Sons did a survey of the Southeast ¼ of Section 31. This corner was set by lost methods and it fell 1' +/- north of a fence along the north line of Section 31. It also fit John Nelsons distance within 5 feet to the Northeast corner. A ½" x 18" iron pipe with a plastic cap marked RLS 9808 was set, ties taken and Kanabec County coordinates established on this position.