

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 30, Township 39, Range 25, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

FOUND THIS MONUMENT
AND ESTABLISHED KANABEC COUNTY COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 144159.54

Easting= 348556.12

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

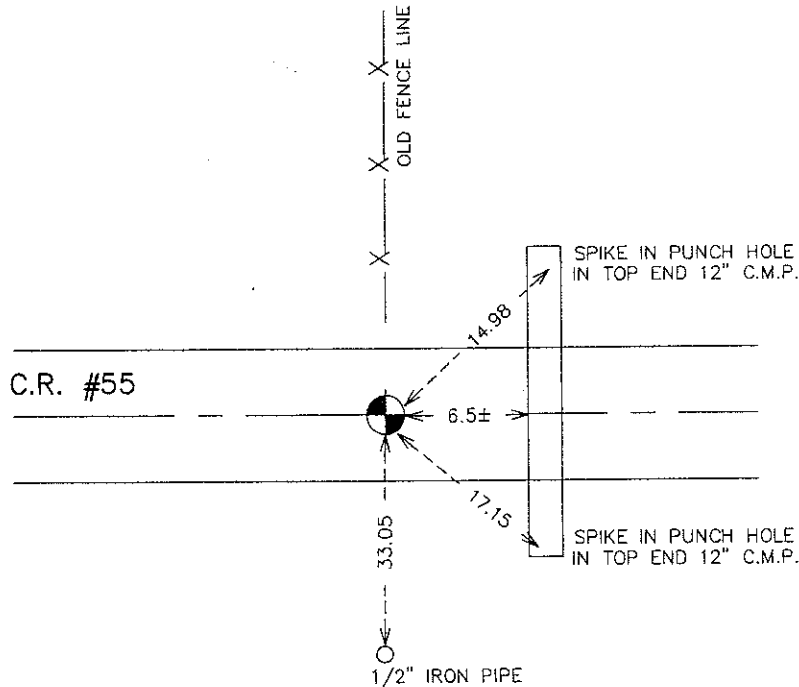

NOTE: OLD FENCE IS 9.0 FEET SOUTH OF NEW FENCE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Blund
Signature

12-21-2010
Date

Registration No. 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

NORTHEAST CORNER SECTION 30, T39, R25

STATEMENT OF EVIDENCE

All of the original bearing trees are now gone.

There is no re-survey data on file for this corner.

on October 24, 1989, M.B. Rude made a survey along the east line of section 30 and the north line of the northeast quarter of Section 30 and the north line of section 29 to locate the lines of occupation and search areas.

This corner falls in the intersection of an east-west county highway and a corner fence post north.

On October 24, 1989, M.B. Rude made a 15' by 23' by 3' deep excavation with the county backhoe to search for any evidence of the original corner location. No evidence was found in the excavation.

The centerline of the existing east-west road and fence line north extended south was accepted as the best available evidence of the original corner location.

In 2004 E.G. Rud and Sons found the #7 capped rebar and established Kanabec County Coordinates on this position.

In 2006 E.G. Rud and Sons established Kanabec County Coordinates on this corner.

On Nov. 23, 2010 E.G. Rud and Sons found this monument and established Kanabec County Coordinates on this position.