

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 26, Township 40, Range 24, 4TH P.M.
 STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
SET A KANABEC COUNTY MONUMENT


Kanabec County U.S. Survey Feet Coordinates
 NAD 1983, HARN 1996 Adjustment
 Obtained by RTK GPS Observation

Northing= 174369.62
 Easting= 398804.41

Note: NAD 1983, HARN 1996 Adjustment
 coordinates are NOT compatible with
 NAD 1983 coordinates
 Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

TIES ARE TO SPIKE IN BLAZE IN NEAR FACE

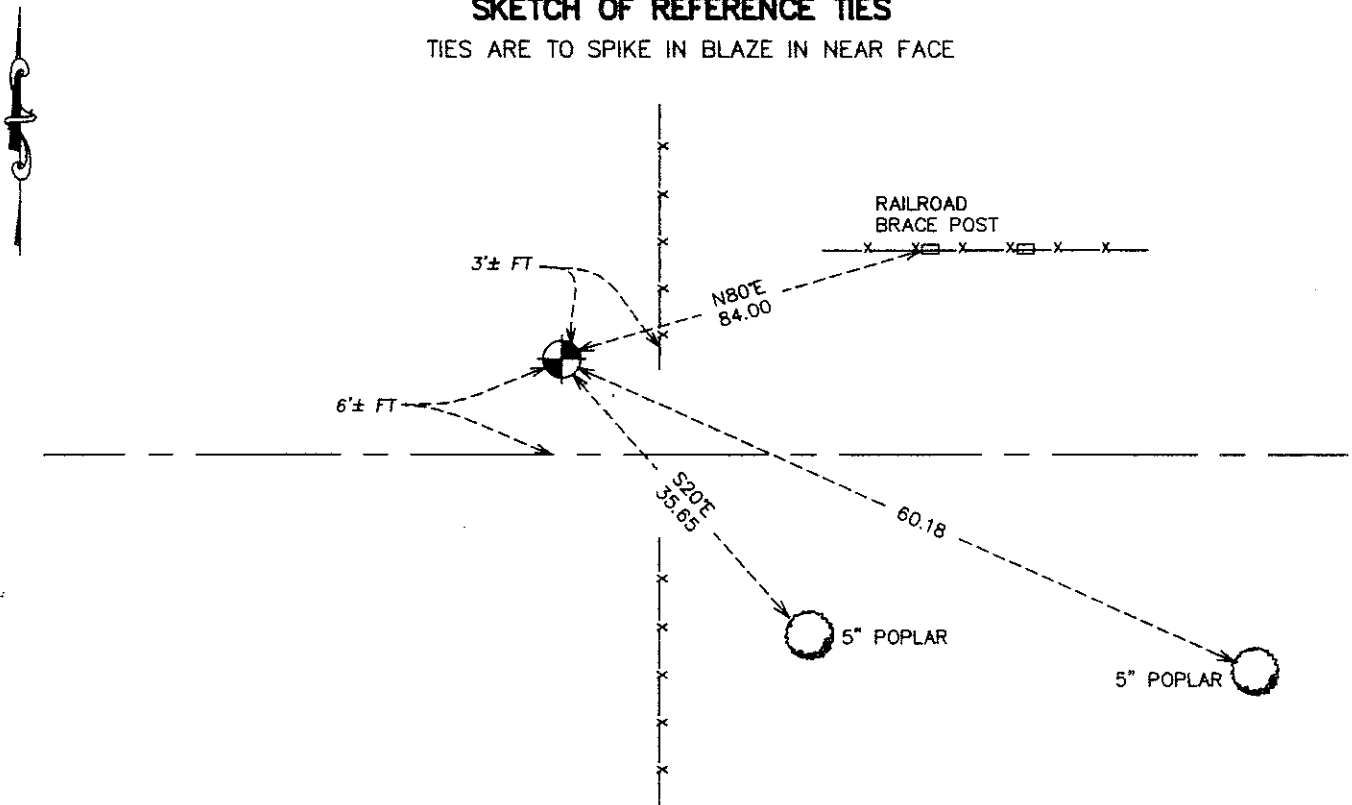

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Rud
Signature

3-31-2008
Date

Registration No. 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the _____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

BY _____ Deputy

DOCUMENT NO. _____

NORTH QUARTER CORNER SECTION 26, TOWNSHIP 40, RANGE 24

STATEMENT OF EVIDENCE

ALL OF THE ORIGINAL BEARING TREES ARE NOW GONE.

CHARLES HANDSCHU'S SURVEY RECORDS FROM 1928 SHOW AN IRON MONUMENT ON LINE AND SPLIT BETWEEN THE NORTHEAST AND NORTHWEST CORNERS OF SECTION 26..

M.B. RUDE MADE AN EXCAVATION WITH THE BACKHOE AT THIS LOCATION 10 FEET BY 10 FEET, 2 FEET DEEP, 1/2 FOOT INTO PEAT AT THE CENTERLINE OF THE ROADS EAST-WEST AND FENCE LINE NORTH-SOUTH. HE DID NOT FIND ANY EVIDENCE OF HANDSCHU'S CORNER IN THE EXCAVATION..

M.B. RUDE SET A 2 AND 3/4 INCH BY 19 INCH CAST IRON MONUMENT AT THE LINE AND SPLIT LOCATION USED BY HANDSCHU IN 1928.

IN FEBRUARY 2008 E.G. RUD & SONS, INC. RAN A SURVEY AROUND SECTIONS 23 AND 26 AND FOUND A CAST ALUMINUM MONUMENT AT THIS LOCATION. HOWEVER THIS MONUMENT HAS BEEN DISTURBED AND WAS LEANING TO THE NORTH. THEREFORE A NEW MONUMENT WAS SET ON LINE AND SPLIT, NEW TIES WERE TAKEN AND KANABEC COUNTY COORDINATES WERE ESTABLISHED ON THIS POSITION USING GLOBAL POSITIONING SYSTEM (G.P.S.) EQUIPMENT. THIS FIT WITHIN 0.04 OF A FOOT OF M.B. RUDE'S MEASUREMENT.