

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 5, Township 42, Range 22, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 8/18/98 Placed a 3/4" X 24" IRON ROD WITH A PLASTIC CAP MARKED "MNDNR SURVEY MARKER"
DATE

SKETCH OF REFERENCE TIES

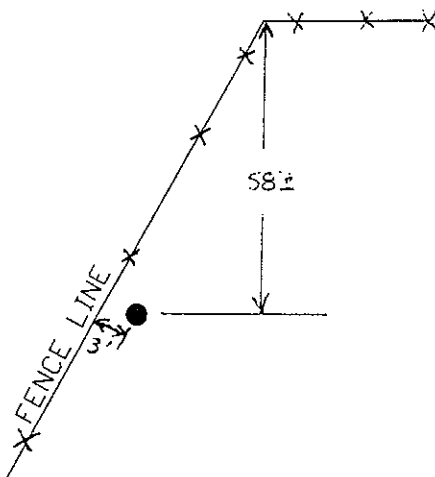

KANABEC CO.
COORDINATES

N 256340.56
E 437345.91

No Good Ties Available

Statement of evidence relative to this corner location is on back of page.

12/98
WMA00271

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 12/8/98
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. recorders office at _____ .M. on the _____ day of _____ A.D., 19____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

North Quarter Corner Section 5, Township 42 North, Range 22 West

The DNR Bureau of Engineering contacted the following for survey information:

Minnesota Secretary of State's Office
Kanabec County Recorders's Office
Kanabec County Highway Engineer
Kanabec County Surveyor
Bill Hayden, Land Surveyor
Terrence Johnson, Land Surveyor
Aitkin County Recorder's Office
Aitkin County Land Department

1849 U.S. General Land Office notes obtained from the Secretary of State's Office states that a post was set to mark the corner with the following bearing trees marked:

Pine 30" N 10° W 19 links (12.54 feet)
Pine 20" S 25° E 16 links (10.56 feet)

1997 MN DNR Bureau of Engineering searched for the corner at the lost position and found nothing.

1998 MN DNR Bureau of Engineering considered this corner lost and established a position for it by single proportion and set a DNR Survey Marker. The corners used for the proportion are the Northeast Corner Section 5 and the Northeast Corner Section 6. Measurements to the section corners east and west are:

S89°22'48"E 2632.37 feet
N89°22'48"W 2632.37 feet

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425