

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST Corner of Section 34, Township 41, Range 22, 4TH P.M.
 STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
 In March 2005 found this monument
 and established G.P.S. coordinates on the position.


Kanabec County U.S. Survey Feet Coordinates
 NAD 1983, HARN 1996 Adjustment
 Obtained by RTK GPS Observation

Northing= 191654.81
 Easting= 449871.60

Note: NAD 1983, HARN 1996 Adjustment
 coordinates are NOT compatible with
 NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES FROM TIE SHEET 744

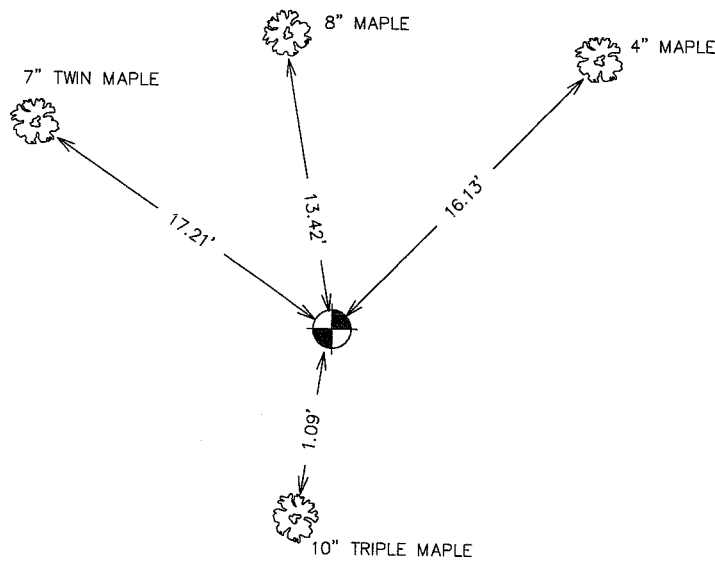

TIES ARE TO SPIKE IN
 BLAZE IN NEAR FACE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data
 contained herein was prepared by me or under
 my direct supervision.

Ernest J. Reed
 Signature

11-15-2005
 Date

Registration No. Minnesota No 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in
 the County Recorder's office at _____ M. on the
 _____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

ALL OF THE ORIGINAL BEARING TREES ARE NOW GONE.

THERE IS NO RESURVEY DATA ON FILE FOR THIS CORNER.

IN JANUARY 1986, M.B. RUDE RAN A SURVEY ALONG THE TOWNSHIP LINE TO LOCATE THE EXISTING MONUMENTS, LINES OF OCCUPATION AND TO SEARCH THE AREA.

THERE ARE NO LINES OF OCCUPATION NEAR THIS CORNER. A SEARCH WAS MADE FOR EVIDENCE OF THIS CORNER IN JANUARY AND IN APRIL OF 1986, BUT NO EVIDENCE WAS FOUND.

THIS CORNER WAS SET ON LINE AND PROPORTIONAL MEASUREMENT BETWEEN THE SOUTH QUARTER CORNER OF SECTION 35 AND THE SOUTHEAST CORNER OF SECTION 33, TOWNSHIP 41, RANGE 22.

IN MARCH 2005 E.G. RUD AND SONS FOUND THIS MONUMENT AND ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION USING G.P.S. EQUIPMENT.