

Index No. 3825045

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 34, Township 38, Range 25, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

*Found a 3/4" rebar set by
D.N.R. in 2002*

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing = 101199.897

Easting = 364540.171

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter = 3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

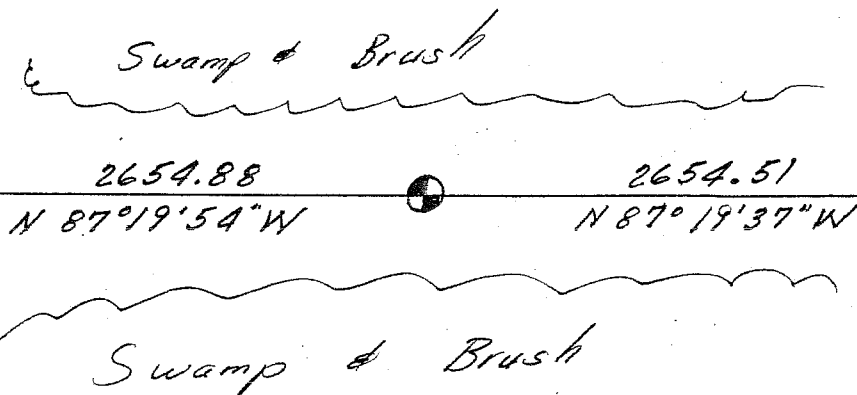

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Red
Signature

4-5-2004
Date

Registration No. 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

SE cor Sec. 34, T38, R25

STATEMENT OF EVIDENCE

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State
Isanti County Recorder and Engineer
Mille Lacs County Recorder and Engineer
Polaris Land Surveying
Dale Anderson -Passe Engineering
Hansen Surveying
MN DOT in St. Cloud

- 1851 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post in swamp and the following bearing trees were marked:
- Spruce 4" N 15° W 56 links (36.96')
 - Spruce 3" N 73° E 52 links (34.32')
 - Spruce 4" S 54° E 16 links (10.56')
 - Spruce 4" S 26° W 32 links (21.12')
- 1914 In the Surveyor's Record Book B, page 165 A.M. Holm surveyed Section 2 and states 'NW Sec. Corner established by Richard Chapman' for corner. He records a distance of 40.24 chains (2655.84') to the north quarter corner and 40.94 chains (2702.04') to the west quarter corner.
- 1916 In August R.S. Chapman filed a Re-Survey Plat of Section 36, Town 38 North- Range 26 West - 4th P.M. in the Mille Lacs County Recorders office. He shows the following information from the southeast corner of section 36 (supposed Govt. Cor.) to the north quarter corner of section 2, T.37, R.25 (Govt. Cor.): Govt Dist. 23,824.68 ft. and Re-Survey 24,024.00 ft.. [Based on the information shown on this plat, it is assumed that there were no other government corners found along this line.]
- 1999 The DNR survey crew located the northwest corner section 6 and the north quarter corner section 2. The distance between them is 23,926.42 feet which is approximately 100' longer than GLO and 100' shorter than Chapman's distance. County CIMs were found at the north quarter and northeast corners of section 6. Lost positions were computed for the corners along the north line of sections 3, 4 and 5. The half mile proportional distance is 2654.77 feet. Iron pipes were found at the north quarter and northeast corners of section 5 that fit the proportional position well.
- 2000 In March, the DNR survey crew set the corners along the north line of sections 3 and 4 on line and at the lost position between the northeast corner section 5 and the north quarter corner section 2. The proportion distance is 2654.73'. This is 1.1' short of the distance recorded by A.M. Holm in 1914. A ¼" x 24" rebar was set to mark the corner.
- 2002 In January, the DNR used this corner to double proportion in the northeast corner of section 10. The east quarter corner section 3 was computed at the lost position 2704.28 feet south of this corner. This is 2.2 feet longer than Holm's distance in 1914.

For more information on our survey in this area please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401.

In Feb 2004 we ran a survey around sections 27, 28, 33 & 34 to tie in existing monuments & to locate lines of occupation. We found the rebar set by the D.N.R. in 2002 & established Kanabec County coordinates on this position using G.P.S. equipment.