

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 40, Range 23, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
SET # 7 REBAR WITH ALUMINUM CAP
AND ESTABLISHED G.P.S. COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 191652.68

Easting= 433006.25

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

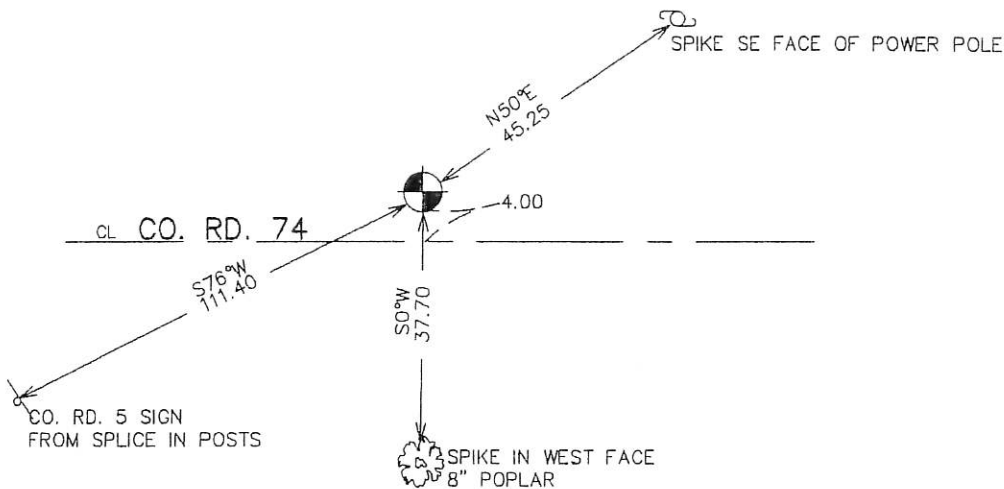

#310

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Reed
Signature

9-11-2006
Date

Registration No. Minn No 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20__

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

NORTHEAST CORNER SECTION 2, T40, R23

STATEMENT OF EVIDENCE

THE ORIGINAL CORNER WAS SET BY DEPUTY SURVEYOR JOHN M. GLEY ON SEPTEMBER 29, 1851. THE CORNER AND BEARING TREES NO LONGER REMAIN. RECORDS OF ANY SUBSEQUENT SURVEYS COULD NOT BE FOUND AT KANABEC COUNTY COURT HOUSE.

IN JUNE 2006 E.G. RUD RAN A SURVEY AROUND SECTIONS 1, 2, 11, AND 12 TO LOCATE EXISTING MONUMENTATION, LINES OF OCCUPATION AND TO DETERMINE SEARCH AREAS. THIS CORNER FALLS ON THE CENTERLINE OF A GRAVEL ROAD RUNNING EAST-WEST AND AT THE INTERSECTION WITH THE NORTHERLY EXTENSION OF A BLACKTOP ROAD RUNNING SOUTH.

ON JULY 25, 2006 AN EXCAVATION 8' NORTH-SOUTH AND 12' EAST-WEST WAS MADE 12" INTO NATURAL GROUND. NO EVIDENCE TO THE CORNER OR BEARING TREES WERE FOUND.

THEREFORE THE CORNER WAS SET ON THE NORTHERLY EXTENSION OF THE EAST LINE OF SECTION 11 AND AT THE INTERSECTION WITH A LINE BETWEEN THE SOUTHEAST CORNER OF SECTION 31 AND THE SOUTH QUARTER CORNER OF SECTION 31, TOWNSHIP 41, RANGE 22. A #7 REBAR WITH AN ALUMINUM CAP WAS SET, TIES TAKEN AND KANABEC COUNTY COORDINATES ESTABLISHED USING G.P.S. EQUIPMENT.