


POLYETHYLENE SHALL BE ATTACHED TO THE TOP OF THE STRAW BALES WITH 6" STAPLES OR SAND BAGS.

STRAW BALES (TYP)

10 FT MIN.

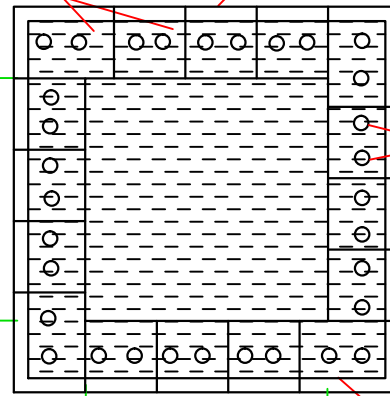

(2) WOODEN LATHE PER STRAW BALE (TYP)  
2" WIDE X 4 FT LONG

30 MIL POLYETHYLENE

10 FT MIN.

PLAN VIEW

POLYETHYLENE SHALL BE ATTACHED TO THE TOP OF THE STRAW BALES WITH 6" STAPLES OR SAND BAGS.


STRAW BALE (TYP)

30 MIL POLYETHYLENE

(2) WOODEN LATHE PER STRAW BALE (TYP)  
2" WIDE X 4 FT LONG

NATIVE SOIL

1 FT MIN.



SIDE VIEW

TEMPORARY CONCRETE WASHOUT FACILITY

Project Name

TEMPORARY CONCRETE  
WASHOUT FACILITY

General Notes

1. A TEMPORARY SIGN SHALL BE ERECTED ON A POST WITH THE WORDS "CONCRETE WASHOUT AREA".
2. FACILITY SHALL BE CLEANED AND MAINTAINED WHEN IT REACHES 2/3 FULL.
3. MAINTENANCE OF THE FACILITY SHALL INCLUDE REMOVING AND DISPOSING OF HARDENED SLURRY AND RETURNING THE FACILITY TO A NORMAL OPERATIONAL CONDITION.

N.T.S.

Date

11-29-2012

Address

Village of Burr Ridge  
Engineering Department  
451 Commerce St.  
Burr Ridge, IL 60527