

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North quarter Corner of Section 8, Township 42, Range 23, 4th P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

Found Kanabec County Monument

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 25151.74

Easting= 405425.17

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

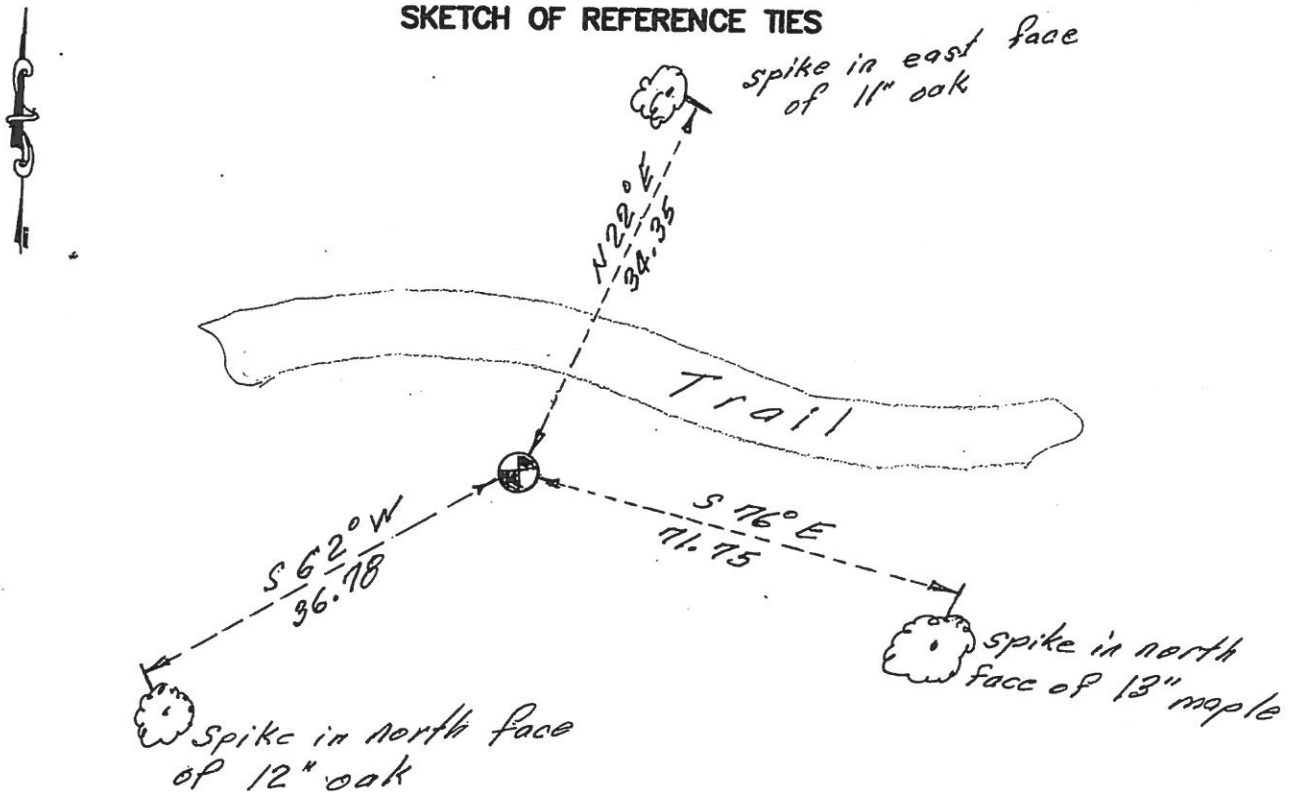

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
Signature

1-04-2018
Date

Registration No. 41578

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20__

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

South Quarter corner Section 5, Township 42, Range 23

4223131

In January 2018, E. G. Rud & Sons, Inc., in doing a survey in the Northeast Quarter and Northwest Quarter located a Kanabec County monument at this location. It was set by County Surveyor M.B. Rude in March, 1974 and placed by single proportionate measurement between the Southeast and Southwest corner of Section 5. New ties were taken and Kanabec County coordinates established on this position.