

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WEST QUARTER Corner of Section 36, Township 40, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
On 05/ /2004 Found a Kanabec County Monument.


Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation

Northing= 166534.655

Easting= 401570.748

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

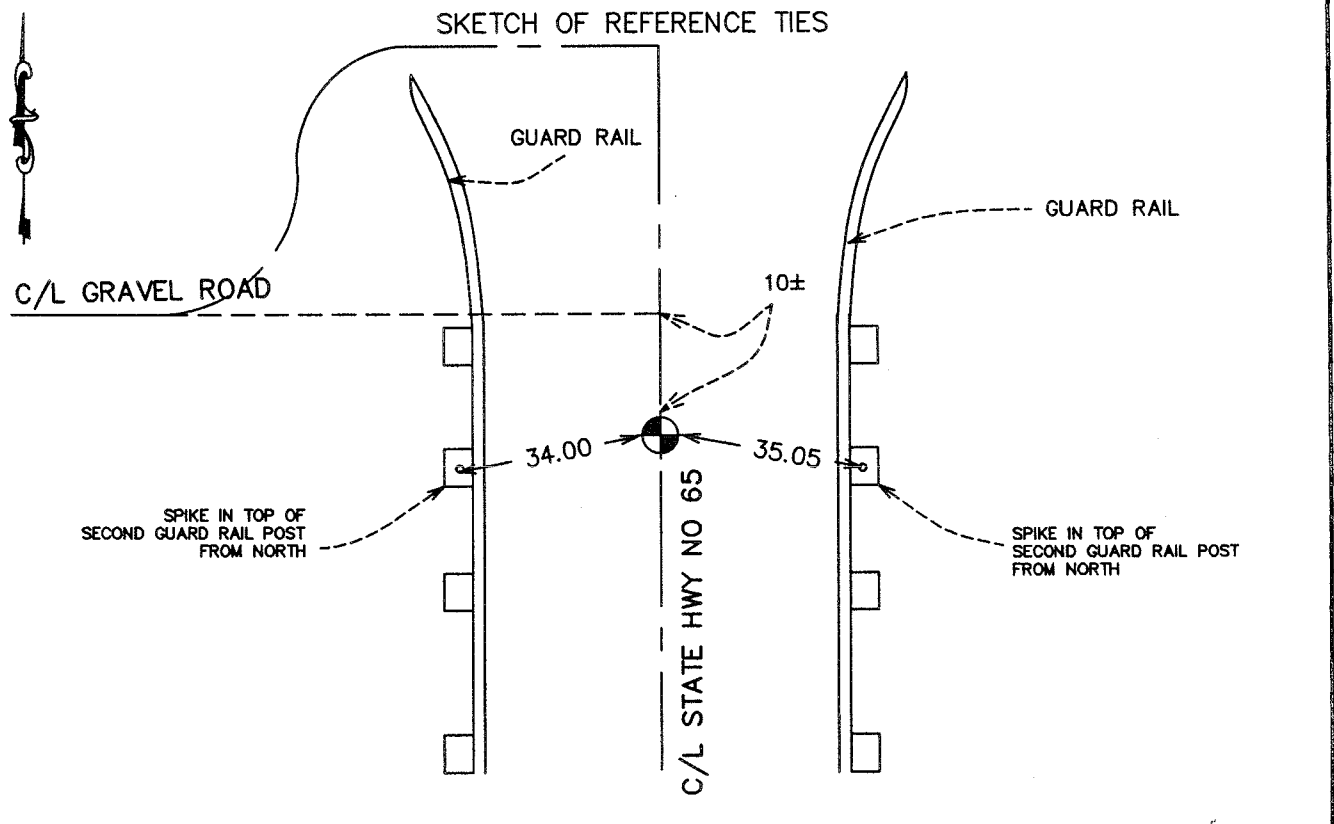

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Reed
Signature

6-14-04
Date

Registration No. 9808

Land Surveyor, [] Professional Engineer

[] County Surveyor, [] County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the _____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE
(FROM M.B. Rude , TIE SHEET 508)

This corner falls on the North side of the Snake River in Highway No. 65.

All evidence of the original corner and John Nelson's corner set in 1901 was destroyed in the highway construction. We reset the quarter corner by proportioning John Nelson's 1901 measurements of the West line of Section 36 and in the centerline of Highway No. 65. The West Quarter corner falls 55.5 feet north of the Highway Department's Pl. This location fits well with the Department of Transportation's right of way map location. There are no lines of occupation east or west.

(2004)

In May of 2004, E.G. Rud ran a survey around Section 36. We found this monument set by M.B. Rude, took new ties and established Kanabec County Coordinates on this location using G.P.S. equipment.