VILAGE OF BURR RIDGE - STREET POLICY COMMITTEE
BURR RIDGE VILLAGE HALL
JANUARY 9, 2023 – 6:00 PM

1. **CALL TO ORDER**

2. **ROLL CALL**

3. **APPROVAL OF MINUTES OF DECEMBER 13, 2021 MEETING**

4. **CONSIDERATION OF YEAR-END SUMMARY OF 2022 CAPITAL PROGRAM**

5. **CONSIDERATION OF FY2024 MOTOR FUEL TAX FUND**

6. **CONSIDERATION OF THE 2023 ROAD PROGRAM**

7. **OTHER CONSIDERATIONS**

8. **PUBLIC COMMENT**

9. **ADJOURNMENT**

BURR RIDGE
PUBLIC WORKS

M E M O

To: Mayor Grasso & Street Policy Committee

From: David Preissig, P.E., Director of Public Works & Village Engineer

Date: January 6, 2023

Subject: Summary of Agenda Items for the 01/09/2023 Committee Meeting

1) CALL TO ORDER

2) ROLL CALL

3) APPROVAL OF DECEMBER 13, 2021 MINUTES

Please see minutes in *Attachment A* for consideration.

4) YEAR-END SUMMARY OF THE 2022 CAPITAL PROGRAM

The Capital Project Funds consist of the Capital Improvement Fund (streets, buildings and sidewalks), the Equipment Replacement Fund, and the Stormwater Management Fund. In this current fiscal year and continuing in future years, the capital outlay within the Capital Improvement Fund now includes the previously separated the Sidewalk/Pathway Fund.

The Capital Improvement Fund, related to streets, is discussed herein. In FY23, this fund relied on the Motor Fuel Tax (MFT) and transfers from the Hotel/Motel Tax Fund to complete the Village's annual road program.

The total of Capital Improvement Program contracts completed in FY2023 is $634,385, which is $165,095 under budget. Significant savings were achieved in asphalt patching that was anticipated for our first-ever project on 89th Street, but which were not actually needed due to the better-than-anticipated condition of the road. Road Program contracts this year, for their advantageous pricing and contractor availability, incorporated additional work on water main repair patching (Water Fund) and various sidewalk repairs.

The Director of Public Works/Village Engineer will discuss each contract and the overall expenditures summarized as follows:

2022 Road Program (FY2023)	Final Cost	Budget
Resurfacing, Patching, Sidewalk Repairs	$ 526,318	$ 684,480
Crack Sealing Streets Contract	$ 79,977	$ 80,000
Pavement Marking Program	$ 18,480	$ 20,000
Material Testing Services	$ 9,610	$ 15,000
Total Road Program	**$ 634,385**	**$ 799,480**
	$165,095 under budget	

5) CONSIDERATION OF FY2024 MOTOR FUEL TAX FUND

The Motor Fuel Tax (MFT) Fund accounts for the Village's share of the State imposed tax on gasoline and diesel fuels. This fuel tax is collected by the State and partially distributed to municipalities based on a specific formula related to resident population. In July 2020, the fuel tax was increased to $.387 per gallon of gasoline and $.462 per gallon of diesel fuel. In September 2022, the Illinois Department of Transportation (IDOT) updated its allocations to municipalities using the populations as certified by the 2020 Census. The September allotment, disbursed in October is the first to use these updated populations. IDOT does not make retroactive changes to previous allotments as a result of census updates. The Village annually is forecast to receive an additional $39,900 in motor fuel tax resulting from the 2020 Census figures.

In past years on an annual basis, the Village typically records transfers from the Motor Fuel Tax Fund to the Capital Improvement Fund to partially cover the actual cost of the Village's Annual Road Program. Beginning in FY2024, staff proposes to allocate its MFT funds to other uses previous paid by General Fund revenues, such as salt purchases, maintenance contracts, or other expenditures which are annually recurring in the Village's budget. Use of MFT funds is permitted for a wide range of road maintenance and improvement programs, contracts, and other payments as authorized by IDOT [*See Attachment B for excerpts of the State's policy "Motor Fuel Tax Funds Source, Distribution, & Uses for Municipality"*]. Staff's reasoning for this change of policy is threefold: first, it will create a significant time savings in the overall development of the Road Program since IDOT will not be required to review or approve the Village's bid documents and award recommendation; second, additional contractors which would not otherwise be statutorily permitted to bid on IDOT contracts would be invited to bid on the Village's Road Program, thus opening the process up to more competitive bidding and likely possibly lower final bids; third, Village staff has experienced the aforementioned points when the 2019 Road Program contracts did not use MFT funds.

The projected Motor Fuel Tax Fund forecasts are still in progress, but could now total approximately $468,000 annually based on a revised population of 11,192.

6) CONSIDERATION OF THE 2023 ROAD PROGRAM RECOMMENDATION

Utilizing primarily the Pavement Condition Rating (PCR) tabulations from the 2021 Street Rating Survey, while considering anticipated schedules for private site development, Village water main replacement and other Village street improvements, staff develops a comprehensive plan for its annual Road Program. Staff is committed to providing a balanced, nominal budget while ensuring a sustainable pavement condition on the Village's street network, which incorporates a proactive pavement maintenance strategy.

Using the methodology above, the Public Works Department also projects a 5-year sustainable budget amount that provides for future Road Program projects, as included for discussion in *Attachment C.*

Proposed 2023 Road Program

The proposed 2023 Road Program presented for consideration by the Committee includes the following Burr Ridge roadways:

- Devon of Burr Ridge subdivision (between 87th and 91st Streets)
    - Aintree Ln
    - Grant St – south of 87th St
    - Hunter Ct
    - Bridle Ct
    - Devon Dr
    - Devon Ct
    - Wedgewood Dr – south of 87th St
    - Saddle Ct
    - Hanover Ct
    - Regent Ct
    - Royal Dr
    - Morgan Ct
    - Tori Ct
    - Westminster Dr
- Design engineering for the 2024 Rebuild Illinois (RBI)-funded project for 83rd Street
- Pavement maintenance including patching, crack sealing, pavement marking
- Quality assurance with material testing contract

2023 Capital Improvement Summary

In 2023, proposed street resurfacing and preventative maintenance in the Capital Improvement Fund would include construction and related services in the amount of $954,500.

ACTION: It is our recommendation that the Street Policy Committee direct staff to prepare plans, specifications, estimates, and funding resolutions to advance the proposed 2023 Capital Improvement Program as described herein.

7) RESIDENT QUESTIONS

Attachments:

A. Street Policy Committee Meeting Minutes of December 13, 2021

B. Excerpt of "MFT Funds Source, Distribution, & Uses for Municipality"

C. Proposed Capital Improvement Fund (Roadways) for FY2023 – FY2027

Appendix A: 2021 Street Survey Report, updated to 2022 Road Program contracts

A

MINUTES
STREET POLICY COMMITTEE
Burr Ridge Village Hall Board Room
7660 S. County Line Road, Burr Ridge
Monday, December 13, 2021

CALL TO ORDER

Mayor Grasso called the meeting to order at 5:34 p.m.

ROLL CALL

Present: Mayor Grasso, Trustee Al Paveza, Trustee Guy Franzese, Trustee Tony Schiappa
Also Present: Village Administrator Evan Walter, Public Works Director/Village Engineer David Preissig, Assistant to the Public Works Director Andrez Beltran, Administrative Intern Gabriel Lopez

APPROVAL OF DECEMBER 14, 2020 MINUTES

Trustee Paveza made a motion to approve the minutes of December 14, 2020. The motion was **seconded** by Trustee Schiappa, and **approved** by a vote of 3-0.

YEAR-END SUMMARY OF 2021 CAPITAL PROGRAM

Public Works Director David Preissig stated that the total 2021 Capital Improvement Program contracts completed for street maintenance, which extended to Sidewalk/Pathway Fund maintenance tasks, was $880,496, coming in $10,122 under budget. Due to advantageous pricing and contractor availability, the 2021 Road Program incorporated additional work on water main repair patching (Water Fund), various sidewalk repairs (Sidewalk/Pathway Fund), and parking lot maintenance at public buildings. Mayor Grasso thanked staff for bringing in these contracts under budget, while continuing to provide the great service for which the Village is known.

PRESENTATION OF 2021 BIENNIAL STREET SURVEY

Mr. Preissig presented the findings of the 2021 Street Rating Survey, which calculates a Pavement Condition Rating (PCR) for each street from a number of factors. These ratings help to determine project priorities and ensure that pavement maintenance is programmed in such a manner as to maximize benefits, minimize costs, and provide equity among stakeholders. Mr. Preissig estimated that the resurfacing cycle for Burr Ridge streets is currently between 16 and 26 years, and highlighted how small investments can reduce future costs through preventative maintenance to stop future deterioration.

Trustee Schiappa made a note of how he can tell how much nicer Village of Burr Ridge roads are compared to neighboring villages. Mayor Grasso spoke highly of the Village of Burr Ridge standards for roads and shared that he hears from residents with the same sentiment as Trustee Schiappa. He continued that the quality of roads in the Village is an example of the long standing policy of the Village's high standards in service provided to residents.

DISCUSSION OF FY22 & 23 MOTOR FUEL TAX FUND REVENUE FORECAST

Mr. Preissig provided a projection of Motor Fuel Tax (MFT) funds for fiscal year 2022 ($423,967) and 2023 ($429,233). Village Administrator Walter shared that once the state certifies the 2020 Census numbers, the Village should receive additional MFT revenues of approximately $48,000.

PRESENTATION OF 2022 ROAD PROGRAM RECOMMENDATION

Mr. Preissig presented the 2022 Road Program and Capitol Improvement budget, which included a five-year projected budget that ensures a sustainable pavement condition on the Village's street network using a proactive pavement maintenance strategy.

The proposed 2022 Road Program highlights Cabernet Court, the Woodcreek Subdivision and Grant Court (specifically from Grant Street to the west end; Garfield Avenue to Woodcreek Drive, and Woodcreek Drive & Court), 82nd Street, 89th Street, Longwood Drive, and Lee Court. Pavement maintenance including patching, crack sealing, pavement marking, and quality assurance with material testing contract.

The proposed 2022 Road Program includes construction in the amount of $768,300. With MFT revenue forecasted approximately in the amount of $429,223 with other Village revenue transfers such as Hotel/Motel funds forecasted at approximately $407,357. It includes $68,280 in contingency costs included in staff's cost projection. Administrator Walter addressed the funding amounts and highlighted the sustainability of a "lock box" funding strategy, which will contain funds dedicated sufficiently to maintain the high standards of road maintenance.

The Committee discussed the proposed 2022 Road Program and the Village's system-wide PCR. With the projected cost of keeping the roads at an 85 PCR rating being approximately$1.4 million per year, the Committee asked for example of roads that were of lesser PCRs. Mr. Preissig presented roads with roads between 55 and 70 PCR. The Committee agreed that the 70 PCR roads were in good shape with only a little maintenance. Overall, they liked the balance of using only restricted funds and meeting the highest needs first.

A motion to recommend approval of the 2022 Road Program as submitted was made by Trustee Franzese. Trustee Paveza **seconded** the motion. Mayor Grasso called for a roll call. Trustee Paveza voted Aye, Trustee Franzese voted Aye, Trustee Schiappa voted Aye, Mayor Grasso voted Aye. The motion was **approved** by a vote of 4-0.

ADJOURNMENT

There was no public comment. There being no further business, a **motion** was made by Trustee Franzese to adjourn the meeting. The motion was **seconded** by Trustee Schiappa and **approved** by a vote of 4-0. The meeting was adjourned at 6:04 p.m.

Respectfully submitted,

David Preissig, P.E.
Public Works Director/Village Engineer

State of Illinois
Illinois Department of Transportation

B

Motor Fuel Tax Funds

Source, Distribution & Uses for Municipality

2020

ILLINOIS TECHNOLOGY TRANSFER CENTER

Illinois Department of Transportation

Motor Fuel Tax Funds Source, Distribution, & Uses for Municipality

Prepared and Published by
Illinois Department of Transportation
Bureau of Local Roads & Streets

Springfield, IL
July 1, 2020

DOCUMENT CONTROL AND REVISION HISTORY

The Motor Fuel Tax Funds Source, Distribution, & Uses for Municipality is reviewed after the general township election every four years. Changes to this manual are approved by the Bureau of Local Roads & Streets, Illinois Association of County Engineers, and the Township Officials of Illinois.

Distribution

This manual is available in the Illinois Technology Transfer Center's library as a Portable Document Format (PDF) on the Center's web site and as a hard copy. Hard copies are also provided to the Illinois Association of County Engineers and the Township Officials of Illinois for highway commissioner training.

Revision History

The Bureau of Local Roads & Streets maintains archived copies of the manual since 2001.

Revision Date	Description	Approval
July 1, 2017	Updated Changes in Policy and Statute	Barry Kent
July 1, 2020	Updated Added information on Transportation Renewal Fund	Stephane Seck-Birhame

PREFACE

This pamphlet was prepared to provide local public agencies officials with a quick reference to the source, distribution and uses of Motor Fuel Tax funds. The contents of this document shall serve as a reference and not the final authority on the receipt or expenditure of Motor Fuel Tax funds.

The following chapters of the Illinois Compiled Statutes were used in the development of this pamphlet:

Chapter 35 Revenue,
Chapter 55 Counties,
Chapter 60 Townships,
Chapter 65 Municipalities, Chapter 605 Highway Code.

The following chapters of the Bureau of Local Roads and Streets Manual were used in the developments of this pamphlet:

Chapter 2, 3, and 4.

EXPENDITURE OF THE ILLINOIS MOTOR FUEL TAX FUND

The expenditure of MFT funds requires the approval and supervision of the Department of Transportation. The corporate authorities of the municipality must adopt an ordinance or a resolution appropriating the MFT funds. The ordinance or resolution shall state how the funds will be used and shall be submitted to the appropriate IDOT district office for approval. When MFT funds are used for construction, the ordinance or resolution must specify the location, type(s), length and width of proposed construction.

The Department of Transportation's approval of plans, specifications, and estimates of any construction project must be obtained prior to advertising it for bids as well as prior to awarding any contract. When MFT funds are used for maintenance, the Department of Transportation's approval of the maintenance estimate must be obtained prior to advertising the project for bid. All work requiring bids must be advertised in the Department of Transportation's weekly Contractors Bulletin. Engineering agreements also require approval by the Department.

Please contact the Bureau of Local Roads and Streets in your IDOT district if you have any questions regarding MFT expenditures.

PERMISSIBLE USES OF THE ILLINOIS MOTOR FUEL TAX FUND FOR MUNICIPALITIES

WORK ITEM	REFERENCE
Construction and Maintenance of:	
• Joint Improvements/ Construction or Maintenance Agreements	605 ILCS 5/4-409, 605 ILCS 5/9-101
• Municipal Streets and Extensions, Municipal Alleys, County Highways and Extensions, State Highways, and Federal-aid Routes within the municipality	605 ILCS 5/7-202.1, 202.1a, 202.1b, 202.2, 202.3 & 202.4
• Traffic Control and School Crossing Signals	605 ILCS 5/7-202.5
• Street Lighting Systems	605 ILCS 5/7-202.6
• Storm Sewers	605 ILCS 5/7-202.7
• Pedestrian Subway or Overhead Crossings	605 ILCS 5/7-202.8
• Sidewalks and Pedestrian Paths	605 ILCS 5/7-202.15
• Off-Street Parking Facilities	605 ILCS 5/7-202.17
• Bicycle Signs, Paths, Lanes, or Bicycle Parking Facilities	605 ILCS 5/7-202.20
• Grade Separations and Approaches	605 ILCS 5/7-202.21
• Non-dedicated Subdivision Roads established before July 23, 1959	605 ILCS 5/7-202.21a
Allotment of Funds for:	
• Investments and Deposits	50 ILCS 340/1
• Matching Federal-aid Funds	605 ILCS 5/7-202.10
• Engineering Services	605 ILCS 5/7-202.12
• Retirement of Indebtedness (MFT Eligible Items)	605 ILCS 5/7-202.13
• Local Mass Transit Districts	605 ILCS 5/7-202.14
• Motor Vehicle Safety Inspection Lanes Operation and Maintenance	605 ILCS 5/7-202.19
• Payment of Principal and Interest on Road Bonds	605 ILCS 5/7-202.18
• Engineering Investigation	605 ILCS 5/7-202.11
• Toll Bridge Studies	605 ILCS 5/7-202.16
Although the Statutes do not explicitly state that MFT funds can be used for the work items below, IDOT has determined that the costs for these items are eligible if they are related to MFT maintenance or construction.	
• Curb Ramps	BLRS Man. Sect. 4-3.03(b)
• Right-of-Way	BLRS Man. Sect. 4-3.03(b)
• Salt Storage Facilities	BLRS Man. Sect. 4-3.03(b)
• Equipment Operations Costs	BLRS Man. Sect. 4-3.03(b)
• Utility Adjustments	BLRS Man. Sect. 4-3.03(b)
• Wages or Salaries	BLRS Man. Sect. 4-3.03(c)
• Holidays, Vacation, and Sick Leave	BLRS Man. Sect. 4-3.03(c)
• Workers' Compensation Insurance Premiums	BLRS Man. Sect. 4-3.03(c)
• Retirement Fund and Social Security Fund	BLRS Man. Sect. 4-3.03(c)
• Health, Hospitalization, and Life Insurance	BLRS Man. Sect. 4-3.03(c)
• Asset Management	BLRS Man. Sect. 4-3.06
• Miscellaneous Expenses in Connection with Bond Issue Improvements	BLRS Man. Sect. 4-4.02 & 4-3.02(f)
• Tree Trimming and Tree Removal	BLRS Man. Sect. 14-1.03(i)
• Railroad Signal Protection and Crossing Work	BLRS Man. Chapter 40

Note: All uses of Motor Fuel Tax are subject to the provisions and limitations reflected in the BLRS Manual and the States statutes.

C

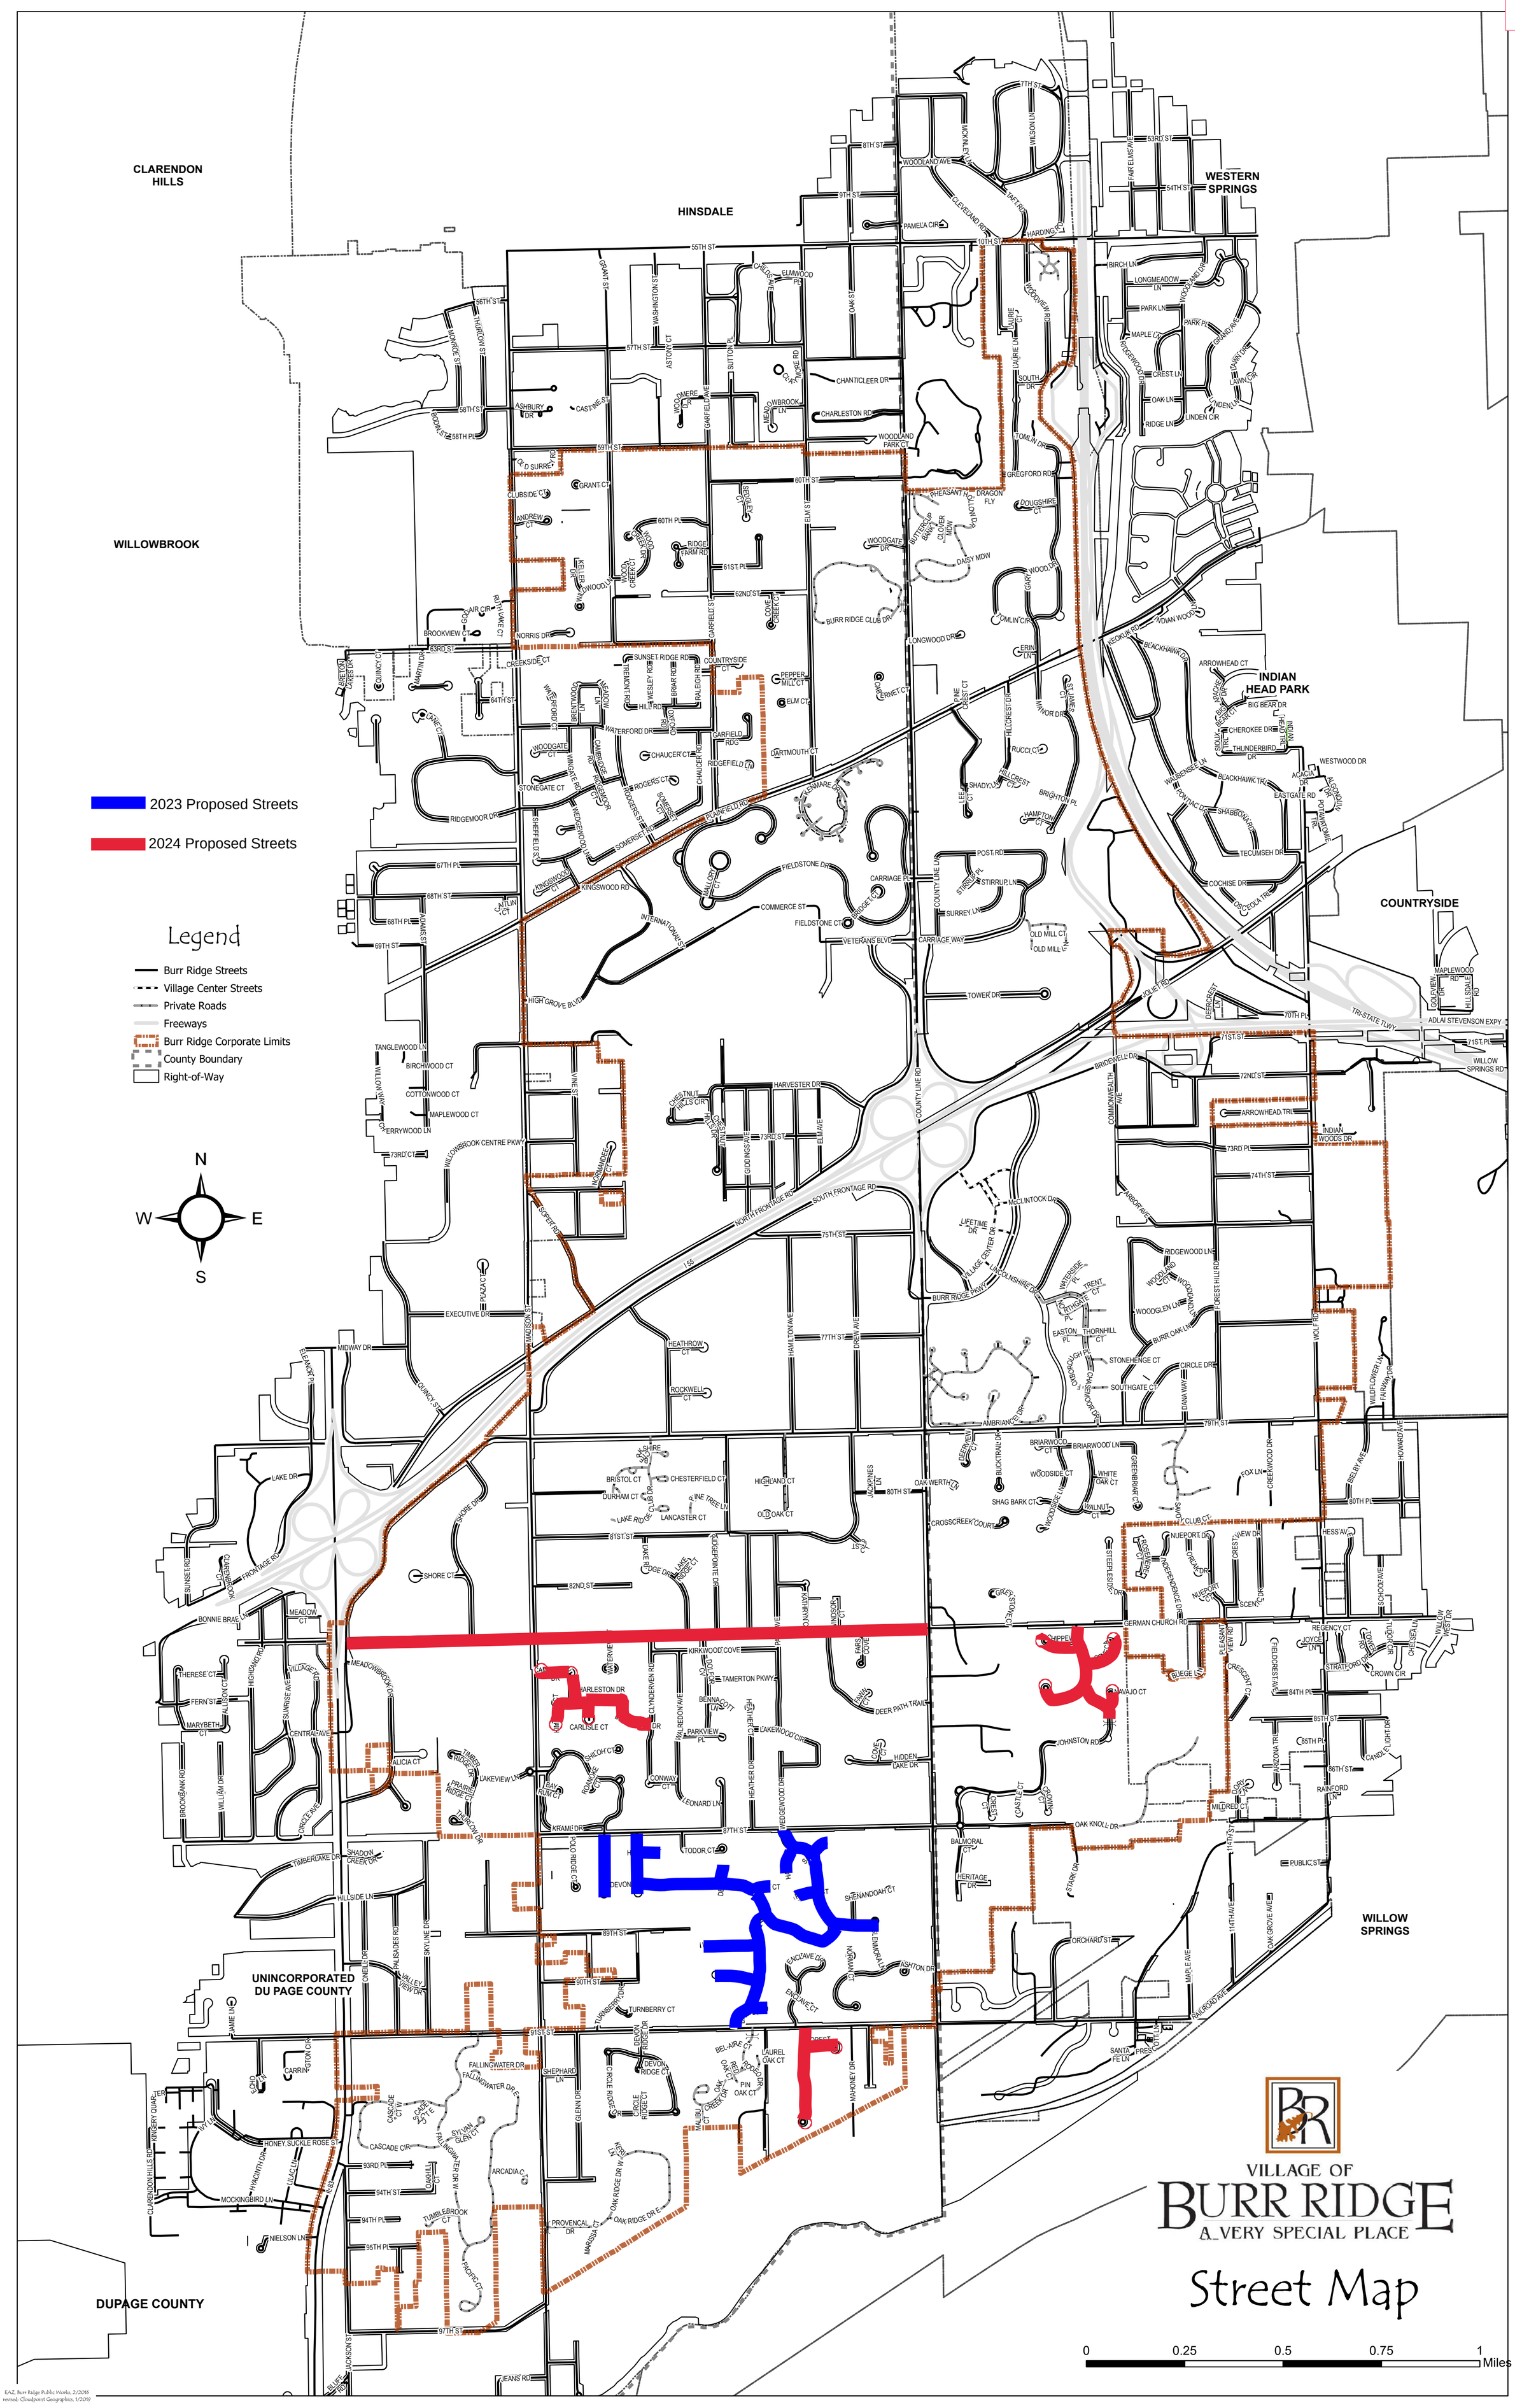

EAZ, Burr Ridge Public Works, 2/2016
revised: Cloudpoint Geographics, 1/2019

C

Proposed FY 23-24 Capital Improvement Program

Subdivision or Street	From	To	2021 PCR	Last Rehab Year	Area (sy)	Rehabilitation Option	Cost/sy $	Project Cost
Street Resurfacing Total								***$ 763,500***
Devon of Burr Ridge			*74.7*	*weighted average PCR*	*31,900*			***$ 763,500***
AINTREE LN	87TH ST	DEVON DR	72.6	2001	1,920	RESURF LOCAL URBAN	$ 23.90	$ 45,900.00
AINTREE LN	DEVON DR	SOUTH END	71.6	2001	470	RESURF LOCAL URBAN	$ 23.90	$ 11,300.00
GRANT ST	HUNTER CT	DEVON DR	78.6	2001	1,140	RESURF LOCAL URBAN	$ 23.90	$ 27,300.00
GRANT ST	DEVON DR	SOUTH END	80.7	2001	440	RESURF LOCAL URBAN	$ 23.90	$ 10,600.00
GRANT ST	87TH ST	HUNTER CT	76.8	2001	730	RESURF LOCAL URBAN	$ 23.90	$ 17,500.00
HUNTER CT	GRANT ST	EAST END	70.8	2001	820	RESURF LOCAL URBAN	$ 23.90	$ 19,600.00
BRIDLE CT	DEVON DR	EAST END	72.6	2001	730	RESURF LOCAL URBAN	$ 23.90	$ 17,500.00
DEVON DR	AINTREE LN	GRANT ST	72.9	2001	1,120	RESURF LOCAL URBAN	$ 23.90	$ 26,800.00
DEVON DR	GRANT ST	DEVON CT	72.7	2001	3,170	RESURF LOCAL URBAN	$ 23.90	$ 75,800
DEVON DR	DEVON CT	BRIDLE CT	72.4	2001	1,200	RESURF LOCAL URBAN	$ 23.90	$ 28,700
DEVON CT	DEVON DR	NORTH END	80.9	2001	380	RESURF LOCAL URBAN	$ 23.90	$ 9,100
DEVON DR	BRIDLE CT	ROYAL DR	80.3	2001	1,100	RESURF LOCAL URBAN	$ 23.90	$ 26,300
DEVON DR	ROYAL DR	WEDGEWOOD DR	67.5	2001	3,020	RESURF LOCAL URBAN	$ 23.90	$ 72,200
WEDGEWOOD DR	REGENT CT	GLENMORA LN	78.5	2001	1,470	RESURF LOCAL URBAN	$ 23.90	$ 35,200
WEDGEWOOD DR	SADDLE CT	REGENT CT	77.5	2001	1,490	RESURF LOCAL URBAN	$ 23.90	$ 35,700
WEDGEWOOD DR	87TH ST	HANOVER CT	85.0	2001	780	RESURF LOCAL URBAN	$ 23.90	$ 18,700
WEDGEWOOD DR	HANOVER CT	SADDLE CT	85.7	2001	800	RESURF LOCAL URBAN	$ 23.90	$ 19,200
SADDLE CT	WEDGEWOOD DR	EAST END	76.9	2001	510	RESURF LOCAL URBAN	$ 23.90	$ 12,200
HANOVER CT	WEDGEWOOD DR	SOUTH END	74.8	2001	780	RESURF LOCAL URBAN	$ 23.90	$ 18,700
REGENT CT	WEDGEWOOD DR	WEST END	79.3	2001	920	RESURF LOCAL URBAN	$ 23.90	$ 22,000
ROYAL DR	WESTMINSTER DR	MORGAN CT	66.7	2001	1,300	RESURF LOCAL URBAN	$ 23.90	$ 31,100
ROYAL DR	MORGAN CT	TORI CT	56.2	2001	1,010	RESURF LOCAL URBAN	$ 23.90	$ 24,200
ROYAL DR	DEVON DR	WESTMINSTER DR	77.3	2001	1,200	RESURF LOCAL URBAN	$ 23.90	$ 28,700
ROYAL DR	TORI CT	91ST ST	76.7	2001	1,050	RESURF LOCAL URBAN	$ 23.90	$ 25,100
MORGAN CT	ROYAL DR	WEST END	79.0	2001	1,650	RESURF LOCAL URBAN	$ 23.90	$ 39,500
TORI CT	ROYAL DR	EAST END	87.4	2001	580	RESURF LOCAL URBAN	$ 23.90	$ 13,900
WESTMINSTER DR	ROYAL DR	WEST END	75.9	2001	2,120	RESURF LOCAL URBAN	$ 23.90	$ 50,700
Preventative Maintenance & Ancillary Services Total								***$ 191,000***
83rd Street RBI								
Design Engineering								$ 56,000
Village Street Maintenance								
Crack Sealing								$ 60,000
Misc. Patching								$ 40,000
Pavement Marking								$ 20,000
Material Testing								$ 15,000
							PROPOSED ROAD PROGRAM TOTAL	**$ 954,500**

Proposed FY 24-25 Capital Improvement Program

Subdivision or Street	From	To	2021 PCR	Last Rehab Year	Area (sy)	Rehabilitation Option	Cost/sy $	Project Cost
Street Resurfacing Total								***$ 1,365,380***
Arrowhead Farm Subdivision			*68.7*	*weighted average PCR*	11,000			***$ 276,600.00***
ARROWHEAD FARM DR	OMAHA DR	SOUTH END	66.2	2004	2,360	RESURF LOCAL URBAN	$ 25.10	$ 59,300.00
ARROWHEAD FARM DR	SENECA CT	OMAHA DR	67.6	2004	940	RESURF LOCAL URBAN	$ 25.10	$ 23,600.00
ARROWHEAD FARM DR	GERMAN CHURCH RD	CHIPPEWA CT	75.8	2004	650	RESURF LOCAL URBAN	$ 25.10	$ 16,400.00
ARROWHEAD FARM DR	CHIPPEWA CT	SENECA CT	77.2	2004	930	RESURF LOCAL URBAN	$ 25.10	$ 23,400.00
CHIPPEWA CT	ARROWHEAD FARM DF	WEST END	58.5	2004	1,610	RESURF LOCAL URBAN	$ 25.10	$ 40,500.00
NAVAJO CT	OMAHA DR	NORTH END	66.3	2004	960	RESURF LOCAL URBAN	$ 25.10	$ 24,100.00
OMAHA DR	NAVAJO CT	JOHNSTON RD	73.4	2004	630	RESURF LOCAL URBAN	$ 25.10	$ 15,900.00
OMAHA DR	ARROWHEAD FARM DF	NAVAJO CT	75.5	2004	1,120	RESURF LOCAL URBAN	$ 25.10	$ 28,200.00
SENECA CT	ARROWHEAD FARM DF	NORTH END	69.9	2004	1,800	RESURF LOCAL URBAN	$ 25.10	$ 45,200.00
Cambridge Estates			*79.7*	*weighted average PCR*	*6,850*			***$ 172,400.00***
BRIARWOOD DR	CLYNDERVEN RD	CANTEBERRY DR	90.0	2018	920	RESURF LOCAL URBAN	$ 25.10	$ 23,100.00
CAMBRIDGE DR	MADISON ST	CHARLESTON DR	84.0	2001	1,280	RESURF LOCAL URBAN	$ 25.10	$ 32,200.00
CAMELOT DR	CARLISLE CT	CANTEBERRY DR	75.1	2001	1,110	RESURF LOCAL URBAN	$ 25.10	$ 27,900.00
CAMELOT DR	KIMBERLY CT	CHARLESTON DR	80.0	2001	550	RESURF LOCAL URBAN	$ 25.10	$ 13,900.00
CAMELOT DR	CHARLESTON DR	CARLISLE CT	77.7	2001	560	RESURF LOCAL URBAN	$ 25.10	$ 14,100.00
CANTEBERRY DR	CAMELOT DR	BRIARWOOD DR	78.2	2001	600	RESURF LOCAL URBAN	$ 25.10	$ 15,100.00
CARLISLE CT	CAMELOT DR	SOUTH END	70.6	2001	550	RESURF LOCAL URBAN	$ 25.10	$ 13,900.00
CHARLESTON DR	CAMELOT DR	CAMBRIDGE DR	78.2	2001	810	RESURF LOCAL URBAN	$ 25.10	$ 20,400.00
KIMBERLY CT	CAMELOT DR	SOUTH END	75.8	2001	470	RESURF LOCAL URBAN	$ 25.10	$ 11,800.00
Forest Edge Subdivision			*60.4*	*weighted average PCR*	*5,670*			***$ 142,500.00***
FOREST EDGE CT	FOREST EDGE DR	EAST END	54.2	2003 new	1,750	RESURF LOCAL URBAN	$ 25.10	$ 44,000
FOREST EDGE DR	FOREST EDGE CT	SOUTH END	60.8	2003 new	3,310	RESURF LOCAL URBAN	$ 25.10	$ 83,100
FOREST EDGE DR	91ST ST	FOREST EDGE CT	76.2	2003 new	610	RESURF LOCAL URBAN	$ 25.10	$ 15,400
83rd Street RBI								***$ 773,880.00***
Construction Engineering								$ 78,000.00
Construction (100% RBI)								$ 695,880.00
Preventative Maintenance & Ancillary Services Total								***$ 115,000***
Crack Sealing								$ 60,000
Misc. Patching								$ 20,000
Pavement Marking								$ 20,000
Material Testing								$ 15,000
							PROPOSED ROAD PROGRAM TOTAL	**$ 1,480,380**
							Rebuild Illinois Funds	**$ 695,880**

Proposed FY 25-26 Capital Improvement Program

Subdivision or Street	From	To	2021 PCR	Last Rehab Year	Area (sy)	Rehabilitation Option	Cost/sy $	Project Cost
Street Resurfacing Total								***$ 865,000***
Robert Bartlett's Hinsdale Countryside Estates			*73.2*	*weighted average PCR*	*21,000*			***$ 603,100.00***
75TH ST	DREW AVE	S. FRONTAGE RD	75.5	2003	1,780	RESURF LOCAL RURAL	$ 28.70	$ 51,100.00
75TH ST	HAMILTON AVE	DREW AVE	75.8	2003	1,970	RESURF LOCAL RURAL	$ 28.70	$ 56,600.00
75TH ST	HAMILTON AVE	S. FRONTAGE RD	71.5	2003	1,460	RESURF LOCAL RURAL	$ 28.70	$ 42,000.00
77TH ST	DREW AVE	COUNTY LINE RD	63.0	2003	2,000	RESURF LOCAL RURAL	$ 28.70	$ 57,400.00
77TH ST	HAMILTON AVE	DREW AVE	74.5	2003	1,960	RESURF LOCAL RURAL	$ 28.70	$ 56,300.00
DREW AVE	75TH ST	77TH ST	78.4	2003	3,060	RESURF LOCAL RURAL	$ 28.70	$ 87,900.00
DREW AVE	77TH ST	79TH ST	76.1	2003	2,850	RESURF LOCAL RURAL	$ 28.70	$ 81,800.00
HAMILTON AVE	75TH ST	77TH ST	70.7	2003	3,060	RESURF LOCAL RURAL	$ 28.70	$ 87,900.00
HAMILTON AVE	77TH ST	79TH ST	71.0	2003	2,860	RESURF LOCAL RURAL	$ 28.70	$ 82,100.00
Burr Ridge Estates, Shady Oaks and Kay Subdivisions			*70.1*	*weighted average PCR*	*9,250*			***$ 261,900.00***
HILLCREST DR	PLAINFIELD RD	DITCH	70.6	2008	1,850	RESURF LOCAL RURAL	$ 28.70	$ 53,100.00
HILLCREST DR	RUCCI CT	DITCH	70.9	2009	600	RESURF LOCAL RURAL	$ 28.70	$ 17,300.00
HILLCREST DR	LEE CT	HILLCREST CT	73.0	2009	1,350	RESURF LOCAL RURAL	$ 28.70	$ 38,800.00
HILLCREST DR	HILLCREST CT	RUCCI CT	72.2	2009	960	RESURF LOCAL RURAL	$ 28.70	$ 27,600.00
RUCCI CT	HILLCREST DR	EAST END	76.5	1998 Const	1,670	RESURF LOCAL URBAN	$ 26.40	$ 44,100.00
SHADY LN	PLAINFIELD RD	DITCH	75.2	2009	1,100	RESURF LOCAL RURAL	$ 28.70	$ 31,600.00
SHADY LN	DITCH	LEE CT	56.6	2004	1,720	RESURF LOCAL RURAL	$ 28.70	$ 49,400.00
Preventative Maintenance & Ancillary Services Total								***$ 125,000***
Crack Sealing								$ 60,000
Misc. Patching								$ 30,000
Pavement Marking								$ 20,000
Material Testing								$ 15,000
							PROPOSED ROAD PROGRAM TOTAL	**$ 990,000**
							Estimated Motor Fuel Tax (MFT) Funds	***$ 455,495***
							Transfers from Other Village Funds	**$ 409,560**
							SURPLUS (DEFICIT)	**$ (124,945)**

Proposed FY 26-27 Capital Improvement Program

Subdivision or Street	From	To	2021 PCR	Last Rehab Year	Area (sy)	Rehabilitation Option	Cost/sy $	Project Cost
Street Resurfacing Total								***$ 1,041,500***
Highland Fields Subdivision			*74.5*	*weighted average PCR*	*26,470*			***$ 736,500.00***
87TH ST	JOHNSTON RD	OAK KNOLL DR	61.3	2001 new	5,140	RESURF LOCAL URBAN	$ 27.80	$ 142,900.00
87TH ST	COUNTY LINE RD	JOHNSTON RD	68.4	2001 new	920	RESURF LOCAL URBAN	$ 27.80	$ 25,600.00
BALMORAL CT	JOHNSTON RD	EAST END	80.1	2001 new	770	RESURF LOCAL URBAN	$ 27.80	$ 21,500.00
CASTLE CT	JOHNSTON RD	SOUTH END	73.9	2001 new	880	RESURF LOCAL URBAN	$ 27.80	$ 24,500.00
CREST CT	JOHNSTON RD	SOUTH END	74.1	2001 new	1,000	RESURF LOCAL URBAN	$ 27.80	$ 27,800.00
CROWN CT	JOHNSTON RD	SOUTH END	79.9	2001 new	1,040	RESURF LOCAL URBAN	$ 27.80	$ 29,000.00
JOHNSTON RD	CASTLE CT	CROWN CT	84.5	2001 new	780	RESURF LOCAL URBAN	$ 27.80	$ 21,700.00
JOHNSTON RD	CROWN CT	OMAHA CT	71.8	2001 new	6,310	RESURF LOCAL URBAN	$ 27.80	$ 175,500.00
JOHNSTON RD	87TH ST	CREST CT	72.8	2001 new	2,300	RESURF LOCAL URBAN	$ 27.80	$ 64,000.00
JOHNSTON RD	CREST CT	CASTLE CT	89.9	2001 new	1,050	RESURF LOCAL URBAN	$ 27.80	$ 29,200.00
JOHNSTON RD	87TH ST	BALMORAL CT	89.7	2001 new	700	RESURF LOCAL URBAN	$ 27.80	$ 19,500.00
JOHNSTON RD	BALMORAL CT	HERITAGE DR	83.9	2001 new	1,270	RESURF LOCAL URBAN	$ 27.80	$ 35,400.00
JOHNSTON RD	HERITAGE DR	SOUTH END	84.8	2001 new	3,120	RESURF LOCAL URBAN	$ 27.80	$ 86,800.00
HERITAGE DR	JOHNSTON RD	EAST END	79.5	2001 new	1,190	RESURF LOCAL URBAN	$ 27.80	$ 33,100.00
Elm Street			*69.5*	*weighted average PCR*	*10,089*			***$ 305,000.00***
ELM ST	59TH ST	60TH ST	69.0	2007	1,205	RESURF LOCAL RURAL	$ 30.20	$ 36,500.00
ELM ST	60TH ST	PEPPERMILL CT	62.9	2007	5,919	RESURF LOCAL RURAL	$ 30.20	$ 178,800.00
ELM ST	PEPPERMILL CT	ELM CT	82.0	2007	695	RESURF LOCAL RURAL	$ 30.20	$ 21,000.00
ELM ST	ELM CT	DARTMOUTH CT	81.6	2007	1,475	RESURF LOCAL RURAL	$ 30.20	$ 44,600.00
ELM ST	DARTMOUTH CT	PLAINFIELD RD	85.6	2007	795	RESURF LOCAL RURAL	$ 30.20	$ 24,100.00
Preventative Maintenance & Ancillary Services Total								***$ 125,000***
Crack Sealing								$ 60,000
Misc. Patching								$ 30,000
Pavement Marking								$ 20,000
Material Testing								$ 15,000
							PROPOSED ROAD PROGRAM TOTAL	**$ 1,166,500**

Proposed FY 27-28 Capital Improvement Program

Subdivision or Street	From	To	2021 PCR	Last Rehab Year	Area (sy)	Rehabilitation Option	Cost/sy $	Project Cost
Street Resurfacing Total								***$ 719,500***
Burr Oaks Glen 3 & 4			*80.1*	*weighted average PCR*	*18,631*			***$ 544,900.00***
BRIARWOOD CT	WOODSIDE LN	WEST END	75.0	2007	860	RESURF LOCAL URBAN	$ 29.20	$ 25,200.00
BRIARWOOD LN	SHAG BARK LN	GREENBRIAR CT	74.4	2007	1,340	RESURF LOCAL URBAN	$ 29.20	$ 39,200.00
BRIARWOOD LN	WOODSIDE LN	SHAG BARK LN	78.1	2007	1,220	RESURF LOCAL URBAN	$ 29.20	$ 35,700.00
SHAG BARK CT	WOODSIDE LN	WEST END	81.6	2007	960	RESURF LOCAL URBAN	$ 29.20	$ 28,100.00
SHAG BARK LN	WALNUT CT	WHITE OAK CT	74.9	2007	1,460	RESURF LOCAL URBAN	$ 29.20	$ 42,700.00
SHAG BARK LN	WOODSIDE LN	WALNUT CT	80.4	2007	1,255	RESURF LOCAL URBAN	$ 29.20	$ 36,700.00
SHAG BARK LN	WHITE OAK CT	BRIARWOOD LN	82.6	2007	1,266	RESURF LOCAL URBAN	$ 29.20	$ 37,000.00
WALNUT CT	SHAG BARK LN	EAST END	81.7	2007	1,173	RESURF LOCAL URBAN	$ 29.20	$ 34,300.00
WHITE OAK CT	SHAG BARK LN	EAST END	81.3	2007	690	RESURF LOCAL URBAN	$ 29.20	$ 20,200.00
WOODSIDE CT	WOODSIDE LN	WEST END	81.2	2007	990	RESURF LOCAL URBAN	$ 29.20	$ 29,000.00
WOODSIDE LN	79TH ST	BRIARWOOD LN	78.7	2007	698	RESURF LOCAL URBAN	$ 29.20	$ 20,400.00
WOODSIDE LN	BRIARWOOD LN	WOODSIDE CT	81.9	2007	1,168	RESURF LOCAL URBAN	$ 29.20	$ 34,200.00
WOODSIDE LN	WOODSIDE CT	SHAG BARK CT	85.1	2007	1,215	RESURF LOCAL URBAN	$ 29.20	$ 35,500.00
WOODSIDE LN	SHAG BARK CT	SOUTH END	86.2	2007	1,194	RESURF LOCAL URBAN	$ 29.20	$ 34,900.00
BRIARWOOD LN	LOT 1	GREENBRIAR CT	72.9	2007	441	RESURF LOCAL URBAN	$ 29.20	$ 12,900.00
GREENBRIAR CT	BRIARWOOD LN	SOUTH END	81.0	2007	2,700	RESURF LOCAL URBAN	$ 29.20	$ 78,900.00
Forest Hill Road (partial)			*72.8*	*weighted average PCR*	*3,510*			***$ 111,800.00***
FOREST HILL RD	77TH ST	CIRCLE DR	72.2	2009	1,200	RESURF LOCAL RURAL	$ 31.80	$ 38,200.00
FOREST HILL RD	CIRCLE DR	79TH ST	74.5	2009	1,750	RESURF LOCAL RURAL	$ 31.80	$ 55,700.00
FOREST HILL RD	BURR OAK LN	77TH ST	68.7	2009	560	RESURF LOCAL RURAL	$ 31.80	$ 17,900.00
Ippisch & Sedgley Estates			*79.6*	weighted average PCR	*4,318*			***$ 126,300.00***
60TH ST	GARFIELD AVE	SEDGLEY CT	80.5	2002	2,293	RESURF LOCAL URBAN	$ 29.20	$ 67,000.00
60TH ST	SEDGLEY CT	ELM ST	75.0	2002	974	RESURF LOCAL URBAN	$ 29.20	$ 28,500.00
SEDGLEY CT	60TH ST	SOUTH END	81.7	2002	1,052	RESURF LOCAL URBAN	$ 29.20	$ 30,800.00
								$ -
Norris Resubdivision			*0.0*		*2,150*			***$ 62,800.00***
NORRIS DR	MADISON ST	EAST END		2004	2,150	RESURF LOCAL URBAN	$ 29.20	$ 62,800.00
Preventative Maintenance & Ancillary Services Total								***$ 125,000***
Crack Sealing								$ 60,000
Misc. Patching								$ 30,000
Pavement Marking								$ 20,000
Material Testing								$ 15,000
							PROPOSED ROAD PROGRAM TOTAL	**$ 844,500**

2021 Street Survey (Partially Updated)

Appendix

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
CREEKWOOD DR	FOX LN	SOUTH END	CREEKWOOD DRIVE	COOK	41.4		Private					
90TH ST	VILLAGE LIMIT	VINE ST	TURNBERRY	DUPAGE	47.9	2007	Thin Lift					1956
COMMONWEALTH AVE	NORTH FRONTAGE RD	NORTH END	BURR RIDGE PARK 1-3	COOK	48.2							1962
CREEKWOOD DR	79TH ST	FOX LN	CREEKWOOD DRIVE	COOK	49.4		Private					
NORMANDEE CT	74TH ST	NORTH END	WEST BABSON PARK	DUPAGE	52.2		Township					
FOREST EDGE CT	FOREST EDGE DR	EAST END	FOREST EDGE	DUPAGE	54.2					2024	Resurface	2003
ROYAL DR	MORGAN CT	TORI CT	DEVON OF BURR RIDGE	DUPAGE	56.2	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
SHADY LN	DITCH	LEE CT	BURR RIDGE ESTATES	COOK	56.6					2025	Resurface	2004
71ST ST	COMED SUBSTATION	HARVESTER PARK	71ST STREET	DUPAGE	56.8							1997
CHIPPEWA CT	ARROWHEAD FARM DR	WEST END	ARROWHEAD FARM	COOK	58.5	2004	Resurface			2024	Resurface	1991
GRANT ST	63RD ST	NORTH END (62ND ST)	WILDWOOD 1ST ADD	DUPAGE	59.4	2008	Resurface					1956
FOREST EDGE DR	FOREST EDGE CT	SOUTH END	FOREST EDGE	DUPAGE	60.8					2024	Resurface	2003
TOMLIN DR	TOMLIN CIR	GARYWOOD DR	BURR RIDGE MEADOWS	COOK	61.1	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1979
87TH ST	JOHNSTON RD	OAK KNOLL DR	HIGHLAND FIELDS	COOK	61.3			2022	Cracksealing	2026	Resurface	2000
ELM ST	60TH ST	PEPPERMILL CT	ELM STREET	DUPAGE	62.9	2007	Resurface	2014	Cracksealing	2026	Resurface	1956
77TH ST	DREW AVE	COUNTY LINE RD	ROBERT BARTL HINSD CNTRYSD	DUPAGE	63	2003	Resurface			2025	Resurface	1944
KIRKWOOD COVE	POWER LINES	PARK AVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	63.6	2008	Resurface					1970
GARYWOOD DR	TOMLIN CIR	TOMLIN DR	BURR RIDGE MEADOWS	COOK	65.9	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1983
FOREST HILL RD	CIRCLE DR	79TH ST	ALLINSON'S HIGH VIEW ESTAT	COOK	66	2009	Resurface			2027	Resurface	1979
KIRKWOOD COVE	DOLFOR COVE	POWER LINES	BRAEMOOR, UNITS 1 & 2	DUPAGE	66.1	2008	Resurface					1972
ARROWHEAD FARM DR	OMAHA DR	SOUTH END	ARROWHEAD FARM	COOK	66.2	2004	Resurface			2024	Resurface	1991
NAVAJO CT	OMAHA DR	NORTH END	ARROWHEAD FARM	COOK	66.3	2004	Resurface			2024	Resurface	1991
GARFIELD ST	RUSTIC ACRES	SOUTH END	GARFIELD ST	DUPAGE	66.5	2013	Resurface	2016	Cracksealing			1970
FOREST HILL RD	BURR OAK LN	77TH ST	BURR OAKS GLEN 1 & 2	COOK	66.7	2009	Resurface			2027	Resurface	1979
TOMLIN CIR	TOMLIN DR	GARYWOOD DR	BURR RIDGE MEADOWS	COOK	67.2	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1983
87TH ST	15W181 87TH ST	COUNTY LINE RD	87TH STREET	DUPAGE	67.5	2011	Resurface					1956
FOREST HILL RD	77TH ST	CIRCLE DR	ALLINSON'S HIGH VIEW ESTAT	COOK	67.5	2009	Resurface			2027	Resurface	1979
DEVON DR	ROYAL DR	WEDGEWOOD DR	DEVON OF BURR RIDGE	DUPAGE	67.5	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
ARROWHEAD FARM DR	SENECA CT	OMAHA DR	ARROWHEAD FARM	COOK	67.6	2004	Resurface			2024	Resurface	1991
HAMPTON CT	MANOR DR	WEST END	HEATHERFIELDS	COOK	67.6	2002	Resurface	2022	Cracksealing			1988
87TH ST	COUNTY LINE RD	JOHNSTON RD	HIGHLAND FIELDS	COOK	68.4			2022	Cracksealing	2026	Resurface	2001
ELM ST	59TH ST	60TH ST	ELM STREET	DUPAGE	69	2007	Resurface	2014	Cracksealing	2026	Resurface	1956
TURNBERRY DR	TURNBERRY CT	91ST ST	TURNBERRY	DUPAGE	69.6	2007	Thin Lift					1990
SENECA CT	ARROWHEAD FARM DR	NORTH END	ARROWHEAD FARM	COOK	69.9	2004	Resurface			2024	Resurface	1991
BRIDEWELL DR	BURR RIDGE PKWY	BURR RIDGE PKWY	BURR RIDGE PARK 1-3	COOK	70.2	1997	Resurface	2010	Cracksealing			1987
91ST ST	IL ROUTE 83	FALLINGWATER SUB	91ST STREET	DUPAGE	70.3	2006	Widen/Resurf	2020	Cracksealing			1990
SHAG BARK LN	WALNUT CT	WHITE OAK CT	BURR OAKS GLEN 3 & 4	COOK	70.4	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
CARLISLE CT	CAMELOT DR	SOUTH END	CAMBRIDGE ESTATES	DUPAGE	70.6	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
CLYNDERVEN RD	BRIARWOOD DR	CONWAY CT	PARKVIEW	DUPAGE	70.6	2008	Resurface					1984
HILLCREST DR	PLAINFIELD RD	DITCH	SHADY OAKS	COOK	70.6					2025	Resurface	2008
87TH ST	WEDGEWOOD DR	15W181 87TH ST	87TH STREET	DUPAGE	70.7	2011	Resurface					1956
HAMILTON AVE	77TH ST	79TH ST	ROBERT BARTL HINSD CNTRYSD	DUPAGE	70.7	2003	Resurface			2025	Resurface	1944
HUNTER CT	GRANT ST	EAST END	DEVON OF BURR RIDGE	DUPAGE	70.8	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
HILLCREST DR	RUCCI CT	DITCH	BURR RIDGE ESTATES	COOK	70.9	2009	Resurface			2025	Resurface	1987
HAMILTON AVE	75TH ST	77TH ST	ROBERT BARTL HINSD CNTRYSD	DUPAGE	71	2003	Resurface			2025	Resurface	1944
75TH ST	HAMILTON AVE	SOUTH FRONTAGE RD	ROBERT BARTL HINSD CNTRYSD	DUPAGE	71.5	2003	Resurface			2025	Resurface	1944
BRIARWOOD CT	WOODSIDE LN	WEST END	BURR OAKS GLEN 3 & 4	COOK	71.6	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1988
AINTREE LN	DEVON DR	SOUTH END	DEVON OF BURR RIDGE	DUPAGE	71.6	2001	Resurface	2011	Cracksealing	2023	Resurface	1989
JOHNSTON RD	CROWN CT	OMAHA DR	HIGHLAND FIELDS	COOK	71.8			2022	Cracksealing	2026	Resurface	2001
SHILOH CT	KRAML DR	EAST END	KRAML ESTATES	DUPAGE	71.8	2002	Resurface	2015	Cracksealing	2028	Resurface	1991
HILLCREST DR	HILLCREST CT	RUCCI CT	BURR RIDGE ESTATES	COOK	72.2	2009	Resurface			2025	Resurface	1987
DEVON DR	DEVON CT	BRIDLE CT	DEVON OF BURR RIDGE	DUPAGE	72.4	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
BAY RUM CT	KRAML DR	EAST END	KRAML ESTATES	DUPAGE	72.5	2009	Resurface	2015	Cracksealing	2028	Resurface	1991
AINTREE LN	87TH ST	DEVON DR	DEVON OF BURR RIDGE	DUPAGE	72.6	2001	Resurface	2011	Cracksealing	2023	Resurface	1989
BRIDLE CT	DEVON DR	EAST END	DEVON OF BURR RIDGE	DUPAGE	72.6	2001	Resurface	2011	Cracksealing	2023	Resurface	1982

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
BRIDEWELL DR	FAIR ELMS AVE	CENTRAL AVE	BURR RIDGE PARK 1-3	COOK	72.7							1996
DEVON DR	GRANT ST	DEVON CT	DEVON OF BURR RIDGE	DUPAGE	72.7	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
JOHNSTON RD	87TH ST	CREST CT	HIGHLAND FIELDS	COOK	72.8			2022	Cracksealing	2026	Resurface	2001
DEVON DR	AINTREE LN	GRANT ST	DEVON OF BURR RIDGE	DUPAGE	72.9	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
HARVESTER DR	NORTH FRONTAGE RD	CHESTNUT HILLS DR	HARVESTER DRIVE	DUPAGE	72.9			2010	Cracksealing			1997
HILLCREST DR	LEE CT	HILLCREST CT	BURR RIDGE ESTATES	COOK	73	2009	Resurface			2025	Resurface	1987
74TH ST	FOREST HILL RD	WOLF RD	PLEASANTDALE NORTH	COOK	73.1	2008	Resurface					1956
BRIARWOOD LN	SHAG BARK LN	GREENBRIAR CT	BURR OAKS GLEN 3 & 4	COOK	73.2	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1988
OMAHA DR	NAVAJO CT	JOHNSTON RD	ARROWHEAD FARM	COOK	73.4	2004	Resurface			2024	Resurface	1991
TAMERTON PKWY	DOLFOR COVE	POWER LINES	BRAEMOOR, UNITS 1 & 2	DUPAGE	73.4	2008	Resurface					1972
TOMLIN DR	GREGFORD RD	LAURIE LN	BURR RIDGE MEADOWS	COOK	73.6	2006	Thin Lift	2022	Cracksealing			1983
DOLFOR COVE	BENNACOTT LN	PARKVIEW PL	BRAEMOOR, UNITS 1 & 2	DUPAGE	73.7	2008	Resurface					1972
CASTLE CT	JOHNSTON RD	SOUTH END	HIGHLAND FIELDS	COOK	73.9			2022	Cracksealing	2026	Resurface	2001
MADISON ST	PROVENCAL DR	97TH ST	MADISON STREET	DUPAGE	73.9	2014	Resurface	2021	Patching			1956
83RD ST	SOUTH FRONTAGE RD	SHORE DR	83RD STREET	DUPAGE	74	2006	Resurface	2010	Cracksealing	2024	Resurface	1970
DREW AVE	91ST ST	SOUTH END	ESTER SUBDIVISION	DUPAGE	74.1	2003	Resurface			2028	Resurface	1956
CREST CT	JOHNSTON RD	SOUTH END	HIGHLAND FIELDS	COOK	74.1			2022	Cracksealing	2026	Resurface	2001
CLYNDERVEN RD	83RD ST	KIRKWOOD COVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	74.2	2008	Resurface					1972
LINCOLNSHIRE DR	BURR RIDGE PKWY	MCCLINTOCK DR	BURR RIDGE PARK 1-3	COOK	74.2	2005	Resurface	2019	Cracksealing			1987
77TH ST	HAMILTON AVE	DREW AVE	ROBERT BARTL HINSD CNTRYSD	DUPAGE	74.5	2003	Resurface			2025	Resurface	1944
GARYWOOD DR	ERIN LN	TOMLIN DR	BURR RIDGE MEADOWS	COOK	74.8	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1983
HANOVER CT	WEDGEWOOD DR	SOUTH END	DEVON OF BURR RIDGE	DUPAGE	74.8	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
ENCLAVE DR	ENCLAVE DR	ENCLAVE DR	ENCLAVE	DUPAGE	74.8	2003	Resurface	2022	Cracksealing			1988
GARFIELD ST	91ST ST	RUSTIC ACRES	GARFIELD ST	DUPAGE	74.8	2005	new const	2016	Cracksealing			2005
CAMELOT DR	CARLISLE CT	CANTEBERRY DR	CAMBRIDGE ESTATES	DUPAGE	75.1	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
77TH ST	7700 WOLF RD	WOLF RD	HERITAGE ESTATES	COOK	75.1							2008
SOUTH FRONTAGE RD	MEADOWBROOK DR	83RD ST	SOUTH FRONTAGE ROAD	DUPAGE	75.1	2009	Resurface	2017	Cracksealing			1944
SHAG BARK LN	WOODSIDE LN	WALNUT CT	BURR OAKS GLEN 3 & 4	COOK	75.2	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
SHADY LN	PLAINFIELD RD	DITCH	SHADY OAKS	COOK	75.2					2025	Resurface	2009
BRIARWOOD LN	WOODSIDE LN	SHAG BARK LN	BURR OAKS GLEN 3 & 4	COOK	75.3	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1988
77TH ST	FOREST HILL RD	7700 WOLF RD	PLEASANTDALE NORTH	COOK	75.4	2008	Resurface					1956
SEDGLEY CT	60TH ST	SOUTH END	SEDGLEY ESTATES	DUPAGE	75.4	2002	Resurface	2010	Cracksealing	2027	Resurface	1978
OMAHA DR	ARROWHEAD FARM DR	NAVAJO CT	ARROWHEAD FARM	COOK	75.5	2004	Resurface			2024	Resurface	1991
75TH ST	DREW AVE	SOUTH FRONTAGE RD	ROBERT BARTL HINSD CNTRYSD	DUPAGE	75.5	2003	Resurface			2025	Resurface	1944
PARKVIEW PL	DOLFOR COVE	EAST END	PARKVIEW	DUPAGE	75.6	2008	Resurface					1984
ARROWHEAD FARM DR	GERMAN CHURCH RD	CHIPPEWA CT	ARROWHEAD FARM	COOK	75.8	2004	Resurface			2024	Resurface	1991
KIMBERLY CT	CAMELOT DR	SOUTH END	CAMBRIDGE ESTATES	DUPAGE	75.8	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
75TH ST	FOREST HILL RD	WOLF RD	PLEASANTDALE NORTH	COOK	75.8	2010	Resurface	2022	Cracksealing			1956
75TH ST	HAMILTON AVE	DREW AVE	ROBERT BARTL HINSD CNTRYSD	DUPAGE	75.8	2003	Resurface			2025	Resurface	1944
WOODSIDE LN	BRIARWOOD LN	WOODSIDE CT	BURR OAKS GLEN 3 & 4	COOK	75.9	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
WESTMINSTER DR	ROYAL DR	WEST END	DEVON OF BURR RIDGE	DUPAGE	75.9	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
WOODGATE DR	COUNTY LINE RD	WEST END	WOODGATE	DUPAGE	76	2004	Resurface					1973
WALREDON AVE	KIRKWOOD COVE	PARKVIEW PL	BRAEMOOR, UNITS 1 & 2	DUPAGE	76.1	2008	Resurface					1972
WOODSIDE CT	WOODSIDE LN	WEST END	BURR OAKS GLEN 3 & 4	COOK	76.1	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1988
GARYWOOD DR	TOMLIN DR	TOMLIN CIR	BURR RIDGE MEADOWS	COOK	76.1	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1983
FIELDSTONE DR	WEST END	GARFIELD AVE	FIELDSTONE	DUPAGE	76.1	2014	Resurface	2017	Cracksealing			1993
DREW AVE	75TH ST	77TH ST	ROBERT BARTL HINSD CNTRYSD	DUPAGE	76.1	2003	Resurface			2025	Resurface	1944
FOREST EDGE DR	91ST ST	FOREST EDGE CT	FOREST EDGE	DUPAGE	76.2					2024	Resurface	2003
CONWAY CT	CLYNDERVEN RD	LEONARD LN	PARKVIEW	DUPAGE	76.2	2008	Resurface					1984
TAMERTON PKWY	POWER LINES	PARK AVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	76.4	2008	Resurface					1972
RUCCI CT	HILLCREST DR	EAST END	DICOSOLA'S SUBDIVISION	COOK	76.5			2010	Cracksealing	2025	Resurface	1998
83RD ST	WINDSOR CT	FARS COVE	83RD STREET	DUPAGE	76.6			2010	Cracksealing	2024	Resurface	2006
ROYAL DR	TORI CT	91ST ST	DEVON OF BURR RIDGE	DUPAGE	76.7	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
87TH ST	GRANT ST	TODOR CT	87TH STREET	DUPAGE	76.8	2009	Resurface					1989
WOODSIDE LN	SHAG BARK CT	SOUTH END	BURR OAKS GLEN 3 & 4	COOK	76.8	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
SADDLE CT	WEDGEWOOD DR	EAST END	DEVON OF BURR RIDGE	DUPAGE	76.9	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
WOODSIDE LN	79TH ST	BRIARWOOD LN	BURR OAKS GLEN 3 & 4	COOK	77	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
SHAG BARK LN	WHITE OAK CT	BRIARWOOD LN	BURR OAKS GLEN 3 & 4	COOK	77.1	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
JACK PINE LN	80TH ST	NORTH END	JACK PINE	DUPAGE	77.1	1997	Resurface					1977
PARKVIEW PL	WALREDON AVE	DOLFOR COVE	PARKVIEW	DUPAGE	77.2	2008	Resurface					1984
ROYAL DR	WESTMINSTER DR	MORGAN CT	DEVON OF BURR RIDGE	DUPAGE	77.3	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
ROYAL DR	DEVON DR	WESTMINSTER DR	DEVON OF BURR RIDGE	DUPAGE	77.3	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
SOUTH FRONTAGE RD	MADISON ST	GRANT ST	SOUTH FRONTAGE ROAD	DUPAGE	77.4	2010	Resurface	2010	Cracksealing			1944
GARFIELD AVE	73RD ST	74TH ST	BABSON PARK	DUPAGE	77.5	2017	Resurface	2021	Cracksealing			1956
VETERANS BLVD	VETERANS BLVD	END	FAIR OAKS AT COUNTY LINE	DUPAGE	77.5	2010	Resurface	2017	Cracksealing			2004
BRIARWOOD LN	LOT 1	GREENBRIAR CT	GREENBRIAR	COOK	77.5	2018	Patching	2021	Cracksealing	2027	Resurface	1988
MANOR DR	PLAINFIELD RD	ST. JAMES CT	HEATHERFIELDS	COOK	77.6	2005	Resurface	2022	Cracksealing			1987
87TH ST	DOLFOR COVE	HEATHER DR	87TH STREET	DUPAGE	77.7	2009	Resurface					1956
CAMELOT DR	CHARLESTON DR	CARLISLE CT	CAMBRIDGE ESTATES	DUPAGE	77.7	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
62ND ST	GARFIELD AVE	WEST END	WEST 62ND STREET	DUPAGE	77.7							2006
DOLFOR COVE	KIRKWOOD COVE	TAMERTON PKWY	BRAEMOOR, UNITS 1 & 2	DUPAGE	77.8	2008	Resurface					1972
CLYNDERVEN RD	KIRKWOOD COVE	BRIARWOOD DR	BRAEMOOR, UNITS 1 & 2	DUPAGE	77.9	2008	Resurface					1972
83RD ST	PARK AVE	KATHRYN CT	83RD STREET	DUPAGE	78			2010	Cracksealing	2024	Resurface	2006
CANTEBERRY DR	CAMELOT DR	BRIARWOOD DR	CAMBRIDGE ESTATES	DUPAGE	78	2001	Resurface			2024	Resurface	1978
83RD ST	DEER PATH TRL	WINDSOR CT	83RD STREET	DUPAGE	78.1			2010	Cracksealing	2024	Resurface	2006
83RD ST	GARFIELD AVE	PARK AVE	83RD STREET	DUPAGE	78.2			2019	Cracksealing	2024	Resurface	2006
CHARLESTON DR	CAMELOT DR	CAMBRIDGE DR	CAMBRIDGE ESTATES	DUPAGE	78.2	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
GRANT ST	87TH ST	HUNTER CT	DEVON OF BURR RIDGE	DUPAGE	78.2	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
ENCLAVE DR	91ST ST	ENCLAVE CT	ENCLAVE	DUPAGE	78.3	2003	Resurface	2022	Cracksealing			1988
DREW AVE	77TH ST	79TH ST	ROBERT BARTL HINSD CNTRYSD	DUPAGE	78.4	2003	Resurface			2025	Resurface	1944
ARROWHEAD FARM DR	CHIPPEWA CT	SENECA CT	ARROWHEAD FARM	COOK	78.5	2004	Resurface			2024	Resurface	1991
GRANT ST	HUNTER CT	DEVON DR	DEVON OF BURR RIDGE	DUPAGE	78.7	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
83RD ST	LAKE RIDGE DR	DOLFOR COVE	83RD STREET	DUPAGE	79			2010	Cracksealing	2024	Resurface	2006
GARYWOOD DR	PLAINFIELD RD	ERIN LN	LONGFIELD HILL	COOK	79.1	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1983
GREENBRIAR CT	BRIARWOOD LN	SOUTH END	GREENBRIAR	COOK	79.2	2018	Patching	2004	Rejuvenate	2027	Resurface	1995
ASHTON DR	GLENMORA LN	NORMAN CT	COUNTY LINE CREEK ESTATES	DUPAGE	79.3	2006	Thin Lift	2011	Cracksealing			1990
COUNTY LINE LN	CARRIAGE WAY DR	SURREY LN	CARRIAGE WAY	COOK	79.4	2013	Resurface	2016	Cracksealing			2000
FAIR ELMS AVE	BRIDEWELL DR	SOUTH END	PLEASANTDALE NORTH	COOK	79.4	2012	Resurface	2017	Cracksealing			1956
HERITAGE DR	JOHNSTON RD	EAST END	HIGHLAND FIELDS	COOK	79.5			2022	Cracksealing	2026	Resurface	2001
MADISON ST	91ST ST	SHEPHARD LN	MADISON STREET	DUPAGE	79.5	2014	Resurface	2020	Cracksealing			1956
91ST ST	TURNBERRY DR	GLENN DR	91ST STREET	DUPAGE	79.6	2011	Resurface	2019				1990
WALREDON AVE	PARKVIEW PL	CONWAY CT	PARKVIEW	DUPAGE	79.6	2008	Resurface	2015	Cracksealing			1984
SOUTH FRONTAGE RD	IL ROUTE 83	MEADOWBROOK DR	SOUTH FRONTAGE ROAD	DUPAGE	79.6	2009	Resurface	2010	Cracksealing			2001
87TH ST	TODOR CT	DOLFOR COVE	87TH STREET	DUPAGE	79.7	2009	Resurface					1989
KIRKWOOD COVE	CLYNDERVEN RD	WALREDON AVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	79.7	2008	Resurface					1972
SHAG BARK CT	WOODSIDE LN	WEST END	BURR OAKS GLEN 3 & 4	COOK	79.7	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
83RD ST	SHORE DR	MADISON ST	83RD STREET	DUPAGE	79.8	2006	Resurface	2010	Cracksealing	2024	Resurface	1970
GIDDINGS AVE	74TH ST	NORTH FRONTAGE RD	BABSON PARK	DUPAGE	79.8	2017	Resurface	2021	Cracksealing			1956
WALNUT CT	SHAG BARK LN	EAST END	BURR OAKS GLEN 3 & 4	COOK	79.8	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
CROWN CT	JOHNSTON RD	SOUTH END	HIGHLAND FIELDS	COOK	79.9			2022	Cracksealing	2026	Resurface	2001
COVE CT	HIDDEN LAKE DR	NORTH END	COUNTY LINE ESTATES	DUPAGE	80	2001	Resurface	2020	Cracksealing			1987
BALMORAL CT	JOHNSTON RD	EAST END	HIGHLAND FIELDS	COOK	80.1			2022	Cracksealing	2026	Resurface	2001
63RD ST	GARFIELD AVE	GRANT ST	63RD STREET	DUPAGE	80.2	2008	Resurface					1956
WEDGEWOOD DR	SADDLE CT	REGENT CT	DEVON OF BURR RIDGE	DUPAGE	80.2	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
SOUTH FRONTAGE RD	75TH ST	75TH ST	SOUTH FRONTAGE ROAD	DUPAGE	80.2	2001	Reconstruct	2010	Cracksealing			1944
MORGAN CT	ROYAL DR	WEST END	DEVON OF BURR RIDGE	DUPAGE	80.3	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
MADISON ST	94TH ST	PROVENCAL DR	MADISON STREET	DUPAGE	80.5	2014	Resurface	2020	Cracksealing			1956
DOLFOR COVE	87TH ST	LEONARD LN	PARKVIEW	DUPAGE	80.5	2008	Resurface	2020	Cracksealing			1984
KRAML DR	SHILOH CT	ROANOKE CT	KRAML ESTATES	DUPAGE	80.6	2009	Resurface	2015	Cracksealing	2028	Resurface	1991
GREGFORD RD	LAURIE LN	WEST END	WOODVIEW ESTATES SOUTH	COOK	80.6	2006	Thin Lift					1970

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
87TH ST	HEATHER DR	WEDGEWOOD DR	87TH STREET	DUPAGE	80.7	2009	Resurface					1956
GRANT ST	DEVON DR	SOUTH END	DEVON OF BURR RIDGE	DUPAGE	80.7	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
CAMELOT DR	KIMBERLY CT	CHARLESTON DR	CAMBRIDGE ESTATES	DUPAGE	80.8	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
FIELDSTONE DR	GARFIELD AVE	MALLORY CT	FIELDSTONE	DUPAGE	80.8	2014	Resurface	2017	Cracksealing			1993
NORMAN CT	ASHTON DR	NORTH END	COUNTY LINE CREEK ESTATES	DUPAGE	80.9	2006	Thin Lift	2011	Cracksealing			1990
83RD ST	KATHRYN CT	DEER PATH TRL	83RD STREET	DUPAGE	81			2010	Cracksealing	2024	Resurface	2006
83RD ST	DOLFOR COVE	RIDGEPOINTE DR	83RD STREET	DUPAGE	81			2010	Cracksealing	2024	Resurface	2006
WHITE OAK CT	SHAG BARK LN	EAST END	BURR OAKS GLEN 3 & 4	COOK	81.1	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1988
PRAIRIE RIDGE CT	TIMBER RIDGE DR	WEST END	MADISON CLUB	DUPAGE	81.1	2014	Resurface	2017	Cracksealing			2000
STIRRUP PL	STIRRUP LN	END	CARRIAGE WAY	COOK	81.2	2013	Resurface	2016	Cracksealing			2000
DOLFOR COVE	TAMERTON PKWY	BENNACOTT LN	BRAEMOOR, UNITS 1 & 2	DUPAGE	81.3	2008	Resurface					1972
REGENT CT	WEDGEWOOD DR	WEST END	DEVON OF BURR RIDGE	DUPAGE	81.3	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
ENCLAVE DR	ENCLAVE CT	ENCLAVE DR	ENCLAVE	DUPAGE	81.3	2003	Resurface	2022	Cracksealing			1988
GREGFORD RD	TOMLIN DR	LAURIE LN	WOODVIEW ESTATES SOUTH	COOK	81.5	2006	Thin Lift					1970
ELM ST	ELM CT	DARTMOUTH CT	ELM STREET	DUPAGE	81.6	2007	Resurface	2014	Cracksealing	2026	Resurface	1956
LEONARD LN	CONWAY CT	DOLFOR COVE	PARKVIEW	DUPAGE	81.6	2008	Resurface	2020	Cracksealing			1984
90TH ST	VINE ST	TURNBERRY DR	TURNBERRY	DUPAGE	81.7	2007	Thin Lift					1990
83RD ST	WATERVIEW CT	CLYNDERVEN RD	83RD STREET	DUPAGE	81.9			2010	Cracksealing	2024	Resurface	2006
WEDGEWOOD DR	REGENT CT	GLENMORA LN	DEVON OF BURR RIDGE	DUPAGE	81.9	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
HILLCREST CT	HILLCREST DR	EAST END	HILLCREST	COOK	81.9	2009	Resurface					1991
TURNBERRY DR	90TH ST	TURNBERRY CT	TURNBERRY	DUPAGE	81.9	2007	Thin Lift					1990
83RD ST	RIDGEPOINTE DR	GARFIELD AVE	83RD STREET	DUPAGE	82			2010	Cracksealing	2024	Resurface	2006
PARK AVE	72ND ST	73RD ST	BABSON PARK	DUPAGE	82	2017	Resurface	2021	Cracksealing			1956
ELM ST	PEPPERMILL CT	ELM CT	ELM STREET	DUPAGE	82	2007	Resurface	2014	Cracksealing	2026	Resurface	1956
BRIDEWELL DR	BURR RIDGE PKWY	COMMONWEALTH AVE	BURR RIDGE PARK 1-3	COOK	82.1							1996
HIDDEN LAKE DR	COVE CT	WEST END	COUNTY LINE ESTATES	DUPAGE	82.1	2001	Resurface	2020	Cracksealing			1987
FIELDSTONE DR	COUNTY LINE ROAD	EAST END	FIELDSTONE	DUPAGE	82.1	2014	Resurface	2017	Cracksealing			1993
ENCLAVE CT	ENCLAVE DR	EAST END	ENCLAVE	DUPAGE	82.5	2003	Resurface	2022	Cracksealing			1988
60TH ST	GARFIELD AVE	SEDGLEY CT	IPPISCH SUBDIVISION	DUPAGE	82.5	2012	Resurface	2016	Cracksealing	2027	Resurface	1956
WOODSIDE LN	WOODSIDE CT	SHAG BARK CT	BURR OAKS GLEN 3 & 4	COOK	82.6	2007	Thin Lift	2022	Cracksealing	2027	Resurface	1989
71ST ST	72ND ST	EAST END	PLEASANTDALE NORTH	COOK	82.6	2011	Resurface	2020	Cracksealing			1956
LAURIE LN	TOMLIN DR	GREGFORD RD	WOODVIEW ESTATES SOUTH	COOK	82.6	2006	Thin Lift					1970
KRAML DR	87TH ST	BAY RUM CT	KRAML ESTATES	DUPAGE	82.7	2009	Resurface	2015	Cracksealing	2028	Resurface	1991
MALLORY CT	FIELDSTONE DR	NORTH END	FIELDSTONE	DUPAGE	82.8	2014	Resurface	2017	Cracksealing			1993
JOHNSTON RD	CREST CT	CASTLE CT	HIGHLAND FIELDS	COOK	82.8			2022	Cracksealing	2026	Resurface	2001
BRIDEWELL DR	COMMONWEALTH AVE	FAIR ELMS AVE	BURR RIDGE PARK 1-3	COOK	83							1996
BRIDGET CT	FIELDSTONE DR	NORTH END	FIELDSTONE	DUPAGE	83	2014	Resurface	2017	Cracksealing			1993
72ND ST	71ST ST	WOLF RD	PLEASANTDALE NORTH	COOK	83.1	2011	Resurface	2020	Cracksealing			1956
COUNTY LINE LN	SURREY LN	CARRIAGE PL	CARRIAGE WAY	COOK	83.2	2013	Resurface	2016	Cracksealing			2000
73RD ST	HAMILTON AVE	ELM ST	BABSON PARK	DUPAGE	83.3	2017	Resurface	2021	Cracksealing			1956
ASHTON DR	NORMAN CT	END	COUNTY LINE CREEK ESTATES	DUPAGE	83.3	2006	Thin Lift	2011	Cracksealing			1990
FIELDSTONE DR	MALLORY CT	BRIDGET CT	FIELDSTONE	DUPAGE	83.4	2014	Resurface	2017	Cracksealing			1993
TOMLIN DR	GARYWOOD DR	CREEK	BURR RIDGE MEADOWS	COOK	83.5	2006	Thin Lift	2022	Cracksealing	2028	Resurface	1979
BRIGHTON PL	MANOR DR	WEST END	HEATHERFIELDS	COOK	83.5	2005	Resurface	2022	Cracksealing			1988
GRANT ST	90TH ST	NORTH END	TURNBERRY	DUPAGE	83.6	2007	Thin Lift					1956
WOODGLEN LN	RIDGEWOOD LN	WOODLAND LN	BURR OAKS GLEN 1 & 2	COOK	83.7	2010	Resurface	2018	Cracksealing			1981
CROSS CREEK CT	COUNTY LINE RD	END	CROSSCREEK	COOK	83.7	2008	new const					2008
DEVON DR	BRIDLE CT	ROYAL DR	DEVON OF BURR RIDGE	DUPAGE	83.7	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
91ST ST	ROYAL DR	DEVON RIDGE DR	91ST STREET	DUPAGE	83.8	2011	Resurface	2019	Cracksealing			1990
JOHNSTON RD	BALMORAL CT	HERITAGE DR	HIGHLAND FIELDS	COOK	83.9			2022	Cracksealing	2026	Resurface	2001
CAMBRIDGE DR	MADISON ST	CHARLESTON DR	CAMBRIDGE ESTATES	DUPAGE	84	2001	Resurface	2010	Cracksealing	2024	Resurface	1978
DOLFOR COVE	LEONARD LN	NORTH END	PARKVIEW	DUPAGE	84.2	2008	Resurface	2020	Cracksealing			1984
74TH ST	GIDDINGS AVE	PARK AVE	BABSON PARK	DUPAGE	84.3	2017	Resurface	2021	Cracksealing			1956
72ND ST	PARK AVE	HAMILTON AVE	BABSON PARK	DUPAGE	84.4	2017	Resurface	2021	Cracksealing			1956
JOHNSTON RD	CASTLE CT	CROWN CT	HIGHLAND FIELDS	COOK	84.5			2022	Cracksealing	2026	Resurface	2001

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
KRAML DR	ROANOKE CT	87TH ST	KRAML ESTATES	DUPAGE	84.6	2009	Resurface	2015	Cracksealing	2028	Resurface	1991
THURLOW DR	TIMBER RIDGE DR	EAST END	MADISON CLUB	DUPAGE	84.6	2014	Resurface	2017	Cracksealing			2000
SOUTH FRONTAGE RD	75TH ST	COUNTY LINE RD	SOUTH FRONTAGE ROAD	DUPAGE	84.6	2001	Reconstruct	2010	Cracksealing			1944
TIMBER RIDGE DR	NORTH END	LAKEVIEW LN	MADISON CLUB	DUPAGE	84.7	2014	Resurface	2017	Cracksealing			2000
NORRIS DR	MADISON ST	EAST END	NORRIS RESUBDIVISION	DUPAGE	84.7	2004	Resurface	2022	Cracksealing	2027	Resurface	1997
JOHNSTON RD	HERITAGE DR	8804 JOHNSTON RD	HIGHLAND FIELDS	COOK	84.8			2022	Cracksealing	2026	Resurface	2001
DOLFOR COVE	83RD ST	KIRKWOOD COVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	84.9	2008	Resurface					1972
GIDDINGS AVE	73RD ST	74TH ST	BABSON PARK	DUPAGE	85	2017	Resurface	2021	Cracksealing			1956
73RD ST	GIDDINGS AVE	PARK AVE	BABSON PARK	DUPAGE	85.1	2017	Resurface	2021	Cracksealing			1956
ASHTON DR	ASHTON DR CUL-DE-SAC	GLENMORA LN	COUNTY LINE CREEK ESTATES	DUPAGE	85.1	2006	Thin Lift	2011	Cracksealing			1990
MANOR DR	HAMPTON CT	SOUTH END	HEATHERFIELDS	COOK	85.2	2005	Resurface	2022	Cracksealing			1987
GRANT ST	GRANT CT	WOOD CREEK DR	WOODCREEK	DUPAGE	85.2	2001	Reconstruct	2022	Cracksealing			2001
LAURIE LN	55TH ST	LAURIE COURT	WOODVIEW ESTATES	COOK	85.2	2006	Thin Lift					1970
WEDGEWOOD DR	87TH ST	HANOVER CT	DEVON OF BURR RIDGE	DUPAGE	85.4	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
MADISON ST	87TH ST	TRI-STATE FPD	MADISON STREET	DUPAGE	85.5	2014	Resurface	2016	Cracksealing			1956
ELM ST	DARTMOUTH CT	PLAINFIELD RD	ELM STREET	DUPAGE	85.6	2007	Resurface	2014	Cracksealing	2026	Resurface	1956
73RD ST	GARFIELD AVE	GIDDINGS AVE	BABSON PARK	DUPAGE	85.7	2017	Resurface	2021	Cracksealing			1956
TOMLIN DR	GREGFORD RD	DOUGSHIRE CT	BURR RIDGE MEADOWS	COOK	85.7	2006	Thin Lift	2019	Rejuvenate			1983
WEDGEWOOD DR	HANOVER CT	SADDLE CT	DEVON OF BURR RIDGE	DUPAGE	85.7	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
LAKEVIEW LN	MADISON ST	TIMBER RIDGE DR	MADISON CLUB	DUPAGE	85.7	2014	Resurface	2017	Cracksealing			2000
74TH ST	VINE ST	NORMANDEE CT	WEST BABSON PARK	DUPAGE	85.7	2013	Resurface	2019	Cracksealing			1956
WINDSOR CT	83RD ST	NORTH END	BRAEMOOR ESTATES	DUPAGE	86	2012	Resurface	2019	Cracksealing			1970
72ND ST	GIDDINGS AVE	PARK AVE	BABSON PARK	DUPAGE	86.2	2017	Resurface	2021	Cracksealing			1956
MANOR DR	BRIGHTON PL	HAMPTON CT	HEATHERFIELDS	COOK	86.2	2005	Resurface	2022	Cracksealing			1987
SOUTH FRONTAGE RD	GRANT ST	75TH ST	SOUTH FRONTAGE ROAD	DUPAGE	86.3	2001	Reconstruct	2010	Cracksealing			1944
90TH ST	TURNBERRY DR	GRANT ST	TURNBERRY	DUPAGE	86.5	2007	Thin Lift					1990
DEVON CT	DEVON DR	NORTH END	DEVON OF BURR RIDGE	DUPAGE	86.6	2001	Resurface	2011	Cracksealing	2023	Resurface	1982
LAURIE LN	SOUTH DR	TOMLIN DR	WOODVIEW ESTATES SOUTH	COOK	86.6	2006	Thin Lift					1970
60TH ST	SEDGLEY CT	ELM ST	IPPISCH SUBDIVISION	DUPAGE	86.7	2002	Resurface	2016	Cracksealing	2027	Resurface	1956
TURNBERRY CT	TURNBERRY DR	EAST END	TURNBERRY	DUPAGE	86.7	2007	Thin Lift					1990
MADISON ST	SOUTH FRONTAGE RD	NORTH FRONTAGE RD	MADISON STREET	DUPAGE	86.8	2014	Resurface	2016	Cracksealing			1987
KIRKWOOD COVE	WALREDON AVE	DOLFOR COVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	86.9	2008	Resurface					1972
WOODLAND CT	WOODLAND LN	WEST END	BURR OAKS GLEN 1 & 2	COOK	86.9	2010	Resurface	2018	Cracksealing			1981
ASHTON DR	COUNTY LINE RD	ASHTON DR CUL-DE-SAC	COUNTY LINE CREEK ESTATES	DUPAGE	86.9	2006	Thin Lift	2011	Cracksealing			1990
HIDDEN LAKE DR	COUNTY LINE RD	COVE CT	COUNTY LINE ESTATES	DUPAGE	86.9	2001	Resurface	2020	Cracksealing			1987
COMMONWEALTH AVE	BRIDEWELL DR	SOUTH END	PLEASANTDALE NORTH	COOK	87	2012	Resurface	2017	Cracksealing			1956
PARK AVE	74TH ST	NORTH FRONTAGE RD	BABSON PARK	DUPAGE	87.1	2017	Resurface	2021	Cracksealing			1956
83RD ST	MADISON ST	WATERVIEW CT	83RD STREET	DUPAGE	87.2			2010	Cracksealing	2024	Resurface	2006
TOWER DR	SOUTH FRONTAGE RD	EAST END	BURR RIDGE PARK	COOK	87.4	2015	Resurface	2018	Cracksealing			1965
MCCLINTOCK DR	LINCOLNSHIRE DR	BURR RIDGE PKWY	BURR RIDGE PARK 1-3	COOK	87.4	2005	Resurface	2019	Cracksealing			1987
CARRIAGE WAY DR	COUNTY LINE LN	OLD MILL LN	CARRIAGE WAY	COOK	87.4	2013	Resurface	2016	Cracksealing			2000
TORI CT	ROYAL DR	EAST END	DEVON OF BURR RIDGE	DUPAGE	87.4	2001	Resurface	2005	Rejuvenate	2023	Resurface	1982
NORTH FRONTAGE RD	HARVESTER DR	ELM ST	NORTH FRONTAGE ROAD	DUPAGE	87.4	2004	Reconstruct	2017	Cracksealing			1963
87TH ST	POLO RIDGE CT	AINTREE LN	87TH STREET	DUPAGE	87.5	2009	Resurface	2017	Cracksealing			1989
FARS COVE	83RD ST	SOUTH END	FARS COVE	DUPAGE	87.5	2005	Resurface					1993
HEATHROW CT	GRANT ST	EAST END	BURR RIDGE INDUSTRIAL CMMN	DUPAGE	87.6	2012	Resurface	2016	Cracksealing			1978
FIELDSTONE DR	BRIDGET CT	COUNTY LINE RD	FIELDSTONE	DUPAGE	87.6	2014	Resurface	2017	Cracksealing			1993
SHORE DR	83RD ST	SHORE CT	HINSDALE INDUSTRIAL PARK	DUPAGE	87.6	2018	Resurface	2021	Cracksealing			1970
87TH ST	AINTREE LN	GRANT ST	87TH STREET	DUPAGE	87.7	2009	Resurface	2017	Cracksealing			1989
HAMILTON AVE	72ND ST	73RD ST	BABSON PARK	DUPAGE	87.7	2017	Resurface	2021	Cracksealing			1956
91ST ST	FALLINGWATERS SUB	MADISON ST	91ST STREET	DUPAGE	88	2006	Widen/Resurf	2020	Cracksealing			
CARRIAGE WAY DR	STIRRUP LN	POST RD	CARRIAGE WAY	COOK	88	2013	Resurface	2016	Cracksealing			2000
DREW AVE	80TH ST	81ST CT	DREW AVENUE	DUPAGE	88	2013	Resurface	2017	Cracksealing			1956
MADISON ST	KRAML DR	87TH ST	MADISON STREET	DUPAGE	88	2014	Resurface	2016	Cracksealing			1956
PUMP CTR PARKING			VILLAGE OF BURR RIDGE	COOK	88	1998	Resurface					1984

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
83RD ST	FARS COVE	COUNTY LINE RD	83RD STREET	DUPAGE	88.1			2010	Cracksealing	2024	Resurface	2006
GARFIELD AVE	62ND ST	63RD ST	GARFIELD ST	DUPAGE	88.1	2016	Resurface	2019	Cracksealing			1956
LAURIE LN	LAURIE CT	SOUTH DR	WOODVIEW ESTATES	COOK	88.1	2006	Thin Lift					1970
83RD ST	CLYNDERVEN RD	LAKE RIDGE DR	83RD STREET	DUPAGE	88.3			2010	Cracksealing	2024	Resurface	2006
GIDDINGS AVE	72ND ST	73RD ST	BABSON PARK	DUPAGE	88.3	2017	Resurface	2021	Cracksealing			1956
74TH ST	GARFIELD AVE	GIDDINGS AVE	BABSON PARK	DUPAGE	88.4	2017	Resurface	2021	Cracksealing			1956
GARFIELD AVE	72ND ST	73RD ST	BABSON PARK	DUPAGE	88.4	2017	Resurface	2021	Cracksealing			1956
MANOR DR	ST. JAMES CT	BRIGHTON PL	HEATHERFIELDS	COOK	88.5	2005	Resurface	2022	Cracksealing			1987
WILDWOOD LN	KELLER DR	SOUTH END	WILDWOOD	DUPAGE	88.5	2015	Resurface	2018	Cracksealing			1992
GLENMORA LN	SHENANDOAH LN	ASHTON DR	DEVON WOODS	DUPAGE	88.7	2006	Thin Lift	2011	Cracksealing			1990
TIMBER RIDGE DR	PRAIRIE RIDGE CT	SOUTH END	MADISON CLUB	DUPAGE	88.7	2014	Resurface	2017	Cracksealing			2000
LAURIE CT	LAURIE LN	NORTH END	WOODVIEW ESTATES	COOK	88.7	2006	Thin Lift					1970
COMMERCE ST	HIGH GROVE BLVD	INTERNATIONAL ST	HIGH GROVE	DUPAGE	88.8	2015	Resurface	2018	Cracksealing			1993
ROANOKE CT	KRAML DR	SOUTH END	KRAML ESTATES	DUPAGE	88.8	2009	Resurface	2015	Cracksealing	2028	Resurface	1991
MADISON ST	CAMBRIDGE DR	KRAML DR	MADISON STREET	DUPAGE	88.8	2014	Resurface	2016	Cracksealing			1956
SOUTH FRONTAGE RD	SHORE DR	MADISON ST	SOUTH FRONTAGE ROAD	DUPAGE	88.9	2001	Reconstruct	2010	Cracksealing			1944
91ST ST	DEVON RIDGE DR	TURNBERRY DR	91ST STREET	DUPAGE	89.1	2011	Resurface	2019	Cracksealing			1990
STIRRUP LN	STIRRUP PL	SURREY LN	CARRIAGE WAY	COOK	89.1	2013	Resurface	2016	Cracksealing			2000
91ST ST	MAHONEY DR	FOREST EDGE DR	91ST STREET	DUPAGE	89.2	2011	Resurface	2019	Cracksealing			1990
COVE CREEK CT	62ND ST	SOUTH END	COVE CREEK	DUPAGE	89.5	2017	Resurface	2021	Cracksealing			1989
MADISON ST	83RD ST	CAMBRIDGE DR	MADISON STREET	DUPAGE	89.6	2014	Resurface	2016	Cracksealing			1956
72ND ST	GARFIELD AVE	GIDDINGS AVE	BABSON PARK	DUPAGE	89.7	2017	Resurface	2021	Cracksealing			1956
SHENANDOAH LN	GLENMORA LN	SHENANDOAH CT	DEVON WOODS	DUPAGE	89.7	2006	Thin Lift	2011	Cracksealing			1990
JOHNSTON RD	87TH ST	BALMORAL CT	HIGHLAND FIELDS	COOK	89.7			2022	Cracksealing	2026	Resurface	2001
81ST CT	81ST ST	EAST END	81ST STREET	DUPAGE	89.8	2005	Resurface					1956
72ND ST	HAMILTON AVE	ELM ST	BABSON PARK	DUPAGE	89.8	2017	Resurface	2021	Cracksealing			1956
VETERANS BLVD	NORTH FRONTAGE RD	VETERANS BLVD	FAIR OAKS AT COUNTY LINE	DUPAGE	89.8	2014	Resurface	2017	Cracksealing			1994
73RD PL	FOREST HILL RD	WEST END	PLEASANTDALE NORTH	COOK	89.8	2019	Resurface	2022	Cracksealing			1956
91ST ST	GLENN DR	MADISON ST	91ST STREET	DUPAGE	89.9	2007	Widen/Resurf	2019	Cracksealing			1990
MADISON ST	SHEPHARD LN	94TH ST	MADISON STREET	DUPAGE	89.9	2014	Resurface	2020	Cracksealing			1956
WILDWOOD LN	GRANT ST	KELLER DR	WILDWOOD	DUPAGE	90	2015	Resurface	2018	Cracksealing			1992
ASHTON DR CUL-DE-SAC	ASHTON DR	SOUTH END	COUNTY LINE CREEK ESTATES	DUPAGE	90.1	2006	Thin Lift	2011	Cracksealing			1990
TIMBER RIDGE DR	LAKEVIEW LN	PRAIRIE RIDGE CT	MADISON CLUB	DUPAGE	90.1	2014	Resurface	2017	Cracksealing			2000
SOUTH FRONTAGE RD	83RD ST	SHORE DR	SOUTH FRONTAGE ROAD	DUPAGE	90.1	2001	Reconstruct	2010	Cracksealing			1944
GLENMORA LN	WEDGEWOOD DR	SHENANDOAH LN	DEVON WOODS	DUPAGE	90.2	2006	Thin Lift	2011	Cracksealing			1990
VETERANS BLVD	NORTH FRONTAGE RD	CASE PROPERTY	FAIR OAKS AT COUNTY LINE	DUPAGE	90.2	2010	Resurface	2017	Cracksealing			2004
COMMERCE ST	INTERNATIONAL ST	EAST END	HIGH GROVE	DUPAGE	90.2	2015	Resurface	2018	Cracksealing			1993
GRANT ST	HEATHROW CT	ROCKWELL CT	BURR RIDGE INDUSTRIAL CMMN	DUPAGE	90.3	2012	Resurface	2016	Cracksealing			1978
80TH ST	JACK PINES LN	COUNTY LINE RD	80TH STREET	DUPAGE	90.5	2013	Resurface	2017	Cracksealing			1956
91ST ST	GARFIELD AVE	OAK CREEK DR	91ST STREET	DUPAGE	90.5	2011	Resurface	2019	Cracksealing			1990
MEADOWBROOK DR	SOUTH FRONTAGE RD	VILLAGE LIMITS	MEADOWBROOK	DUPAGE	90.5	2012	Resurface	2017	Cracksealing			1956
OAK WERTH LN	COUNTY LINE RD	EAST END	OAK WERTH	COOK	90.5	2011	Resurface	2019	Cracksealing			1994
91ST ST	ENCLAVE DR	GARFIELD AVE	91ST STREET	DUPAGE	90.6	2011	Resurface	2019	Cracksealing			1990
PARK AVE	73RD ST	74TH ST	BABSON PARK	DUPAGE	90.6	2017	Resurface	2021	Cracksealing			1956
NORTH FRONTAGE RD	COOLING POND	HARVESTER DR	NORTH FRONTAGE ROAD	DUPAGE	90.6	2010	Resurface	2017	Cracksealing			1963
SOPER RD	MADISON ST	75TH ST	WEST BABSON PARK	DUPAGE	90.6	2013	Resurface	2019	Cracksealing			1956
73RD ST	PARK AVE	HAMILTON AVE	BABSON PARK	DUPAGE	90.9	2017	Resurface	2021	Cracksealing			1956
COUNTY LINE LN	CARRIAGE PL	POST RD	CARRIAGE WAY	COOK	91	2013	Resurface	2016	Cracksealing			2000
POST RD	STIRRUP LN	CARRIAGE WAY DR	CARRIAGE WAY	COOK	91	2013	Resurface	2016	Cracksealing			2000
CHESTNUT HILLS DR	CHESTNUT HILLS CIR	SOUTH END	CHESTNUT HILLS	DUPAGE	91.1	2009	Resurface	2019	Cracksealing			1998
60TH ST	ELM ST	COUNTY LINE RD	IPPISCH SUBDIVISION	DUPAGE	91.1	2012	Resurface	2016	Cracksealing			1956
91ST ST	OAK CREEK DR	ROYAL DR	91ST STREET	DUPAGE	91.2	2007	Widen/Resurf	2019	Cracksealing			1990
LINCOLNSHIRE DR	MCCLINTOCK DR	CHASEMOOR DR	BURR RIDGE PARK 1-3	COOK	91.2	2005	Resurface	2019	Cracksealing			1987
INTERNATIONAL ST	HIGH GROVE BLVD	COMMERCE ST	HIGH GROVE	DUPAGE	91.2	2015	Resurface	2018	Cracksealing			1993
KRAML DR	MADISON ST	SHILOH CT	KRAML ESTATES	DUPAGE	91.2	2009	Resurface	2015	Cracksealing	2028	Resurface	1991

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
87TH ST	POLO RIDGE CT	MADISON ST	87TH STREET	DUPAGE	91.4	2009	Resurface	2017	Cracksealing			1956
MADISON ST	TRI-STATE FPD	89TH ST	STAFFORD	DUPAGE	91.4	2013	Resurface	2016	Cracksealing			1956
WOODVIEW RD	1040 WOODVIEW	SOUTH DR	WOODVIEW ESTATES	COOK	91.4	2016	Resurface	2019	Cracksealing			1970
WOODVIEW RD	TARTAN RIDGE TH	1040 WOODVIEW	WOODVIEW ESTATES	COOK	91.4	2005	Resurface	2019	Cracksealing			1970
91ST ST	COUNTY LINE RD	DREW AVE	91ST STREET	DUPAGE	91.6	2007	Widen/Resurf	2019	Cracksealing			2006
91ST ST	FOREST EDGE LN	ENCLAVE DR	91ST STREET	DUPAGE	91.7	2011	Resurface	2019	Cracksealing			1990
ANDREW CT	MADISON ST	EAST END	RUTH LAKE RIDGE	DUPAGE	91.7	2016	Resurface	2019	Cracksealing			1996
GRANT ST	ROCKWELL CT	79TH ST	BURR RIDGE INDUSTRIAL CMMN	DUPAGE	91.8	2012	Resurface	2016	Cracksealing			1978
STIRRUP LN	SURREY LN	CARRIAGE WAY DR	CARRIAGE WAY	COOK	91.8	2013	Resurface	2016	Cracksealing			2000
75TH ST	BRUSH HILL RD	EAST END	WEST BABSON PARK	DUPAGE	91.9	2013	Resurface	2016	Cracksealing			1956
CHESTNUT HILLS CIR	CHESTNUT HILLS DR	CHESTNUT HILLS DR	CHESTNUT HILLS	DUPAGE	92	2009	Resurface	2019	Cracksealing			1998
ST. JAMES CT	MANOR DR	NORTH END	HEATHERFIELDS	COOK	92	2005	Resurface	2022	Cracksealing			1987
HIGH GROVE BLVD	INTERNATIONAL ST	PLAINFIELD RD	HIGH GROVE	DUPAGE	92	2015	Resurface	2019	Cracksealing			1993
OAK HILL CT	94TH ST	NORTH END	OAK HILLS	DUPAGE	92.1	2016	Resurface	2019	Cracksealing			1950
RIDGEWOOD LN	WOODGLEN LN	WOODLAND LN	BURR OAKS GLEN 1 & 2	COOK	92.4	2010	Resurface	2018	Cracksealing			1981
GRANT ST	59TH ST	GRANT CT	WOODCREEK	DUPAGE	92.4	2001	Reconstruct	2022	Cracksealing			2001
DEERVIEW CT	79TH ST	SOUTH END	DEERVIEW	COOK	92.5	2018	Resurface	2021	Cracksealing			1991
HAMILTON AVE	73RD ST	NORTH FRONTAGE RD	BABSON PARK	DUPAGE	92.6	2017	Resurface	2021	Cracksealing			1956
GRANT ST	SOUTH FRONTAGE RD	HEATHROW CT	BURR RIDGE INDUSTRIAL CMMN	DUPAGE	92.6	2012	Resurface	2016	Cracksealing			1978
STIRRUP LN	POST RD	STIRRUP PL	CARRIAGE WAY	COOK	92.6	2013	Resurface	2016	Cracksealing			2000
ROCKWELL CT	GRANT ST	EAST END	BURR RIDGE INDUSTRIAL CMMN	DUPAGE	92.9	2012	Resurface	2016	Cracksealing			1978
MADISON ST	79TH ST	SOUTH FRONTAGE RD	MADISON STREET	DUPAGE	92.9	2014	Resurface	2016	Cracksealing			1987
SHORE CT	SHORE DR	WEST END	HINSDALE INDUSTRIAL PARK	DUPAGE	93	2018	Resurface	2021	Cracksealing			1970
MADISON ST	82ND ST	83RD ST	MADISON STREET	DUPAGE	93	2014	Resurface	2016	Cracksealing			1979
POST RD	COUNTY LINE LN	STIRRUP LN	CARRIAGE WAY	COOK	93.1	2013	Resurface	2016	Cracksealing			2000
ELM ST	72ND ST	73RD ST	BABSON PARK	DUPAGE	93.2	2017	Resurface	2021	Cracksealing			1956
94TH ST	JACKSON ST	OAK HILL CT	OAK HILLS	DUPAGE	93.2	2016	Resurface	2019	Cracksealing			1950
ELM ST	73RD ST	NORTH FRONTAGE RD	BABSON PARK	DUPAGE	93.5	2017	Resurface	2021	Cracksealing			1956
SHORE DR	SHORE CT	SOUTH FRONTAGE RD	HINSDALE INDUSTRIAL PARK	DUPAGE	93.5	2018	Resurface	2021	Cracksealing			1970
72ND ST	CENTRAL AVE	71ST ST	PLEASANTDALE NORTH	COOK	93.5	2011	Resurface	2016	Cracksealing			1956
74TH ST	MADISON ST	VINE ST	WEST BABSON PARK	DUPAGE	93.5	2013	Resurface	2019	Cracksealing			1956
DOUGSHIRE CT	TOMLIN DR	WEST END	BURR RIDGE MEADOWS	COOK	93.6	2015	Resurface	2022	Cracksealing			1979
BUCK TRAIL DR	79TH ST	SOUTH END	DEERVIEW	COOK	93.6	2018	Resurface	2021	Cracksealing			1991
HIGH GROVE BLVD	MADISON ST	COMMERCE ST	HIGH GROVE	DUPAGE	93.6	2015	Resurface	2019	Cracksealing			1993
CENTRAL AVE	BRIDEWELL DR	SOUTH END	PLEASANTDALE NORTH	COOK	93.6	2012	Resurface	2017	Cracksealing			1956
PARK AVE	61ST PL	NORTH END	BRADLEY ESTATES	DUPAGE	93.7	2017	Resurface	2021	Cracksealing			1990
MADISON ST	81ST ST	82ND ST	MADISON STREET	DUPAGE	93.7	2014	Resurface	2016	Cracksealing			1979
91ST ST	DREW AVE	MAHONEY DR	91ST STREET	DUPAGE	94	2011	Resurface	2019	Cracksealing			1990
BURR OAK LN	RIDGEWOOD LN	WOODLAND LN	BURR OAKS GLEN 1 & 2	COOK	94	2010	Resurface	2018	Cracksealing			1980
CARRIAGE PL	COUNTY LINE RD	COUNTY LINE LN	CARRIAGE WAY	COOK	94	2013	Resurface	2016	Cracksealing			2000
KELLER DR	WILDWOOD LN	NORTH END	WILDWOOD	DUPAGE	94	2015	Resurface	2018	Cracksealing			1992
80TH ST	DREW AVE	JACK PINES LN	80TH STREET	DUPAGE	94.2	2003	Resurface	2017	Cracksealing			1956
CARRIAGE WAY DR	OLD MILL LN	STIRRUP LN	CARRIAGE WAY	COOK	94.2	2013	Resurface	2016	Cracksealing			2000
DREW AVE	79TH ST	80TH ST	DREW AVENUE	DUPAGE	94.2	2013	Resurface	2017	Cracksealing			1956
BRUSH HILL RD	75TH ST	NORTH FRONTAGE RD	BRUSH HILL TRUST	DUPAGE	94.4	2013	Resurface	2019	Cracksealing			1993
CHASEMOOR DR	NORTHGATE PL	HUNTINGTON CT	CHASEMOOR	COOK	94.5	2016	Resurface	2019	Cracksealing			1990
CHASEMOOR DR	WATERSIDE PL	TRENT CT	CHASEMOOR	COOK	94.5	2016	Resurface	2019	Cracksealing			1990
SHENANDOAH CT	SHENANDOAH LN	EAST END	DEVON WOODS	DUPAGE	94.7	2006	Thin Lift	2011	Cracksealing			1990
79TH ST	DREW AVE	COUNTY LINE RD	79TH STREET	DUPAGE	95.1	2017	Resurface	2021	Cracksealing			1999
74TH ST	NORMANDEE CT	EAST END	WEST BABSON PARK INCORP.	DUPAGE	95.1	2013	Resurface	2019	Cracksealing			1956
HIGH GROVE BLVD	COMMERCE ST	INTERNATIONAL ST	HIGH GROVE	DUPAGE	95.2	2015	Resurface	2019	Cracksealing			1993
MADISON ST	80TH ST	81ST ST	MADISON STREET	DUPAGE	95.2	2014	Resurface	2016	Cracksealing			1979
VINE ST	MID BLOCK	75TH ST	WEST BABSON PARK	DUPAGE	95.2	2013	Resurface	2016	Cracksealing			1956
59TH ST	GRANT ST	GARFIELD AVE	59TH STREET	DUPAGE	95.5	2018	Resurface					1956
80TH ST	MADISON ST	EAST END	80TH STREET	DUPAGE	95.5	2013	Resurface	2019	Cracksealing			1956

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
RIDGEWOOD LN	BURR OAK LN	WOODGLEN LN	BURR OAKS GLEN 1 & 2	COOK	95.5	2010	Resurface	2018	Cracksealing			1981
MADISON ST	79TH ST	80TH ST	MADISON STREET	DUPAGE	95.5	2014	Resurface	2016	Cracksealing			1979
JACKSON ST	94TH ST	93RD PL	OAK HILLS	DUPAGE	95.5	2016	Resurface	2019	Cracksealing			1950
CHASEMOOR DR	HUNTINGTON CT	EASTON PL	CHASEMOOR	COOK	95.7	2016	Resurface	2019	Cracksealing			1990
VETERANS BLVD	COUNTY LINE RD	NORTH FRONTAGE RD	FAIR OAKS AT COUNTY LINE	DUPAGE	95.8	2014	Resurface	2017	Cracksealing			1994
95TH PL	PALISADES RD	EAST END	OAK HILLS	DUPAGE	95.8	2016	Resurface	2019	Cracksealing			1950
79TH ST	DREW AVE	DREW AVE	79TH STREET	DUPAGE	96	2017	Resurface	2021	Cracksealing			1999
BURR OAK LN	WOODLAND LN	FOREST HILL RD	BURR OAKS GLEN 1 & 2	COOK	96	2010	Resurface	2018	Cracksealing			1980
WOODLAND LN	WOODLAND CT	WOODGLEN LN	BURR OAKS GLEN 1 & 2	COOK	96	2010	Resurface	2018	Cracksealing			1980
GARFIELD AVE	RIDGE FARM RD	61ST PL	GARFIELD ST	DUPAGE	96	2016	Resurface	2019	Cracksealing			1956
JOHNSTON RD	8804 JOHNSTON RD	SOUTH END	HIGHLAND FIELDS 3B	COOK	96			2022	Cracksealing	2026	Resurface	2018
JACKSON ST	94TH PL	94TH ST	OAK HILLS	DUPAGE	96	2016	Resurface	2019	Cracksealing			1950
WATERVIEW CT	83RD ST	SOUTH END	WATERVIEW ESTATES	DUPAGE	96	2008	new const					2008
CHASEMOOR DR	TRENT CT	NORTHGATE PL	CHASEMOOR	COOK	96.1	2016	Resurface	2019	Cracksealing			1990
DEER PATH TRL	83RD ST	FAWN CT	DEER PATH	DUPAGE	96.2	2019	Resurface	2022	Cracksealing			1981
NORTH FRONTAGE RD	VETERANS BLVD	COOLING POND	NORTH FRONTAGE ROAD	DUPAGE	96.2	2004	Reconstruct	2017	Cracksealing			1994
WOODVIEW RD	55TH ST	TARTAN RIDGE TH	WOODVIEW ESTATES	COOK	96.2	2016	Resurface	2019	Cracksealing			1970
SOUTH DR	LAURIE LN	WOODVIEW RD	WOODVIEW ESTATES	COOK	96.4	2016	Resurface	2019	Cracksealing			1970
81ST ST	PARK AVE	81ST CT	81ST STREET	DUPAGE	96.5	2020	Resurface					1956
BURR OAK LN	79TH ST	RIDGEWOOD LN	BURR OAKS GLEN 1 & 2	COOK	96.5	2010	Resurface	2018	Cracksealing			1980
RIDGEWOOD LN	WOODLAND LN	FOREST HILL RD	BURR OAKS GLEN 1 & 2	COOK	96.5	2010	Resurface	2018	Cracksealing			1981
CHASEMOOR DR	EASTON PL	FOXBOROUGH PL	CHASEMOOR	COOK	96.5	2016	Resurface	2019	Cracksealing			1990
73RD PL	WOLF RD	FOREST HILL RD	PLEASANTDALE NORTH	COOK	96.5	2019	Resurface	2022	Cracksealing			1956
ARBOR AVE	75TH ST	WEST END	PLEASANTDALE NORTH	COOK	96.5	2019	Resurface	2022	Cracksealing			1956
POLO RIDGE CT	87TH ST	SOUTH END	POLO RIDGE	DUPAGE	96.5	2016	Resurface	2019	Cracksealing			1996
DEER PATH TRL	FAWN CT	COUNTY LINE RD	DEER PATH	DUPAGE	96.6	2019	Resurface	2022	Cracksealing			1981
94TH PL	JACKSON ST	EAST END	OAK HILLS	DUPAGE	96.9	2016	Resurface	2019	Cracksealing			1950
GREYSTONE CT	GERMAN CHURCH RD	NORTH END	BRIDLE PATH	COOK	97	2017	Resurface	2020	Cracksealing			1999
75TH ST	BRUSH HILL RD	VILLAGE LIMITS	BRUSH HILL TRUST	DUPAGE	97	2013	Resurface	2019	Cracksealing			1995
FOREST HILL RD	75TH ST	RIDGEWOOD LN	BURR OAKS GLEN 1 & 2	COOK	97	2019	Resurface	2022	Cracksealing			1979
WOODLAND LN	RIDGEWOOD LN	WOODLAND CT	BURR OAKS GLEN 1 & 2	COOK	97	2010	Resurface	2018	Cracksealing			1980
BRIARWOOD DR	CLYNDERVEN RD	CANTEBERRY DR	CAMBRIDGE ESTATES	DUPAGE	97	2018	Resurface					1978
SURREY LN	COUNTY LINE LN	STIRRUP LN	CARRIAGE WAY	COOK	97	2013	Resurface	2016	Cracksealing			2000
FIELDSTONE CT	FIELDSTONE DR	END	FIELDSTONE	DUPAGE	97	2014	Resurface	2017	Cracksealing			1996
GARFIELD AVE	60TH ST	60TH PL	GARFIELD ST	DUPAGE	97	2016	Resurface	2019	Cracksealing			1956
GARFIELD AVE	59TH ST	60TH ST	GARFIELD ST	DUPAGE	97	2016	Resurface	2019	Cracksealing			1956
GARFIELD AVE	60TH PL	RIDGE FARM RD	GARFIELD ST	DUPAGE	97	2016	Resurface	2019	Cracksealing			1956
GARFIELD AVE	61ST PL	62ND ST	GARFIELD ST	DUPAGE	97	2016	Resurface	2019	Cracksealing			1956
JACKSON ST	95TH PL	94TH PL	OAK HILLS	DUPAGE	97	2016	Resurface	2019	Cracksealing			1950
JACKSON ST	93RD PL	IL ROUTE 83	OAK HILLS	DUPAGE	97	2016	Resurface	2019	Cracksealing			1950
PEPPER MILL CT	ELM ST	WEST END	PEPPER MILL COURT	DUPAGE	97	2018	Resurface	2021	Cracksealing			1981
94TH ST	MADISON ST	GLENN DR	SPACE VALLEY	DUPAGE	97	2018	Resurface	2021	Cracksealing			1982
94TH ST	GLENN DR	EAST END	SPACE VALLEY	DUPAGE	97	2018	Resurface	2021	Cracksealing			1982
SHEPHARD LN	MADISON ST	GLENN DR	SPACE VALLEY	DUPAGE	97	2018	Resurface	2021	Cracksealing			1982
61ST PL	GARFIELD AVE	PARK AVE	61ST PLACE	DUPAGE	97.2	2017	Resurface	2021	Cracksealing			1988
62ND ST	COVE CREEK CT	EAST END	62ND STREET	DUPAGE	97.2	2017	Resurface	2021	Cracksealing			2001
62ND ST	GARFIELD AVE	COVE CREEK CT	62ND STREET	DUPAGE	97.2	2017	Resurface	2021	Cracksealing			2006
TOMLIN DR	DOUGSHIRE CT	CREEK	BURR RIDGE MEADOWS	COOK	97.2	2016	Patch	2022	Cracksealing			1983
CHASEMOOR DR	LINCOLNSHIRE DR	NORTHGATE PL	CHASEMOOR	COOK	97.2	2016	Resurface	2019	Cracksealing			1990
95TH PL	JACKSON ST	PALISADES RD	OAK HILLS	DUPAGE	97.2	2016	Resurface	2019	Cracksealing			1950
STEEPLESIDE DR	GERMAN CHURCH RD	NORTH END	STEEPLESIDE	COOK	97.2	2017	Resurface	2020	Cracksealing			1990
75TH ST	FOREST HILL RD	ARBOR AVE	PLEASANTDALE NORTH	COOK	97.5	2019	Resurface	2022	Cracksealing			1980
CLUBSIDE CT	MADISON ST	EAST END	RUTH LAKE RIDGE	DUPAGE	97.5	2016	Resurface	2019	Cracksealing			1996
79TH ST	HAMILTON AVE	DREW AVE	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999
79TH ST	GRANT ST	GARFIELD AVE	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
79TH ST	LAKE RIDGE CLUB DR	GRANT ST	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999
79TH ST	GARFIELD AVE	HAMILTON AVE	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999
79TH ST	HAMILTON AVE	HAMILTON AVE	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999
79TH ST	MADISON ST	LAKE RIDGE CLUB DR	79TH STREET	DUPAGE	98	2017	Resurface	2021	Cracksealing			1999
CIRCLE DR	FOREST HILL RD	DANA WAY	ALLINSON'S HIGH VIEW ESTAT	COOK	98	2019	Resurface	2022	Cracksealing			1956
CIRCLE DR	DANA WAY	79TH ST	ALLINSON'S HIGH VIEW ESTAT	COOK	98	2019	Resurface	2022	Cracksealing			1956
DANA WAY	CIRCLE DR	79TH ST	ALLINSON'S HIGH VIEW ESTAT	COOK	98	2019	Resurface	2022	Cracksealing			1956
FOREST HILL RD	RIDGEWOOD LN	BURR OAK LN	BURR OAKS GLEN 1 & 2	COOK	98	2019	Resurface	2022	Cracksealing			1979
WOODLAND LN	WOODGLEN LN	BURR OAK LN	BURR OAKS GLEN 1 & 2	COOK	98	2010	Resurface	2018	Cracksealing			1980
BURR RIDGE PKWY	COUNTY LINE RD	BRIDEWELL DR	BURR RIDGE PARK 1-3	COOK	98	2019	Resurface	2022	Cracksealing			1987
BURR RIDGE PKWY	LINCOLNSHIRE DR	MCCLINTOCK DR	BURR RIDGE PARK 1-3	COOK	98	2019	Resurface	2022	Cracksealing			1987
BURR RIDGE PKWY	MCCLINTOCK DR	BRIDEWELL DR	BURR RIDGE PARK 1-3	COOK	98	2019	Resurface	2022	Cracksealing			1987
BURR RIDGE PKWY	BRIDEWELL DR	LINCOLNSHIRE DR	BURR RIDGE PARK 1-3	COOK	98	2019	Resurface	2022	Cracksealing			1987
CHASEMOOR DR	SOUTHGATE CT	79TH ST	CHASEMOOR	COOK	98	2016	Resurface	2019	Cracksealing			1990
CHASEMOOR DR	STONEHENGE CT	SOUTHGATE CT	CHASEMOOR	COOK	98	2016	Resurface	2019	Cracksealing			1990
CHESTNUT HILLS DR	CHESTNUT HILLS CIR	CHESTNUT HILLS CIR	CHESTNUT HILLS	DUPAGE	98	2009	Resurface	2019	Cracksealing			1998
CHESTNUT HILLS DR	HARVESTER DR	CHESTNUT HILLS CIR	CHESTNUT HILLS	DUPAGE	98	2009	Resurface	2019	Cracksealing			1998
LAKE RIDGE DR	83RD ST	LAKE RIDGE CT	LAKE RIDGE	DUPAGE	98	2020	Resurface					1981
93RD PL	JACKSON ST	EAST END	OAK HILLS	DUPAGE	98	2016	Resurface	2019	Cracksealing			1950
PALISADES RD	95TH PL	SOUTH END	OAK HILLS	DUPAGE	98	2016	Resurface	2019	Cracksealing			1950
FOREST HILL RD	73RD PL	74TH ST	PLEASANTDALE NORTH	COOK	98	2019	Resurface	2022	Cracksealing			1979
RIDGE FARM RD	GARFIELD AVE	SOUTHWEST END	RIDGE FARM	DUPAGE	98	2019	Resurface	2022	Cracksealing			1990
COUNTRYSIDE CT	GARFIELD AVE	EAST END	SKINNER'S SUBDIVISION	DUPAGE	98	2019	Resurface	2022	Cracksealing			1956
TODOR CT	87TH ST	END	TODOR MANOR	DUPAGE	98	2019	Resurface	2022	Cracksealing			1988
VINE ST	90TH ST	NORTH END	VINE STREET		98	2019	Resurface	2022	Cracksealing			1989
VINE ST	74TH ST	MID BLOCK	WEST BABSON PARK	DUPAGE	98	2013	Resurface	2016	Cracksealing			1956
ELM CT	ELM ST	WEST END	PROVENCE PLACE	DUPAGE	98.2	2018	Resurface	2021	Cracksealing			2001
GLENN DR	91ST ST	SHEPHARD LN	SPACE VALLEY	DUPAGE	98.2	2018	Resurface	2021	Cracksealing			1982
FAWN CT	DEER PATH TRL	NORTH END	DEER PATH	DUPAGE	98.5	2019	Resurface	2022	Cracksealing			1981
CIRCLE RIDGE DR	DEVON RIDGE DR	CIRCLE RIDGE CT	DEVON RIDGE	DUPAGE	98.5	2020	Resurface					1988
CIRCLE RIDGE DR	CIRCLE RIDGE CT	DEVON RIDGE DR	DEVON RIDGE	DUPAGE	98.5	2020	Resurface					1988
DEVON RIDGE DR	91ST ST	CIRCLE RIDGE DR	DEVON RIDGE	DUPAGE	98.5	2020	Resurface					1988
RIDGEPOINTE DR	83RD ST	81ST ST	LAKE RIDGE	DUPAGE	98.5	2020	Resurface					1981
FOREST HILL RD	74TH ST	75TH ST	PLEASANTDALE NORTH	COOK	98.5	2019	Resurface	2022	Cracksealing			1979
CHASEMOOR DR	NORTHGATE PL	WATERSIDE PL	CHASEMOOR	COOK	98.6	2016	Resurface	2019	Cracksealing			1990
CHASEMOOR DR	FOXBOROUGH PL	STONEHENGE CT	CHASEMOOR	COOK	98.6	2016	Resurface	2019	Cracksealing			1990
LAKE RIDGE CT	LAKE RIDGE DR	END	LAKE RIDGE	DUPAGE	98.7	2020	Resurface					1981
81ST ST	LAKE RIDGE DR	RIDGEPOINTE DR	LAKE RIDGE CLUB	DUPAGE	98.7	2020	Resurface					1981
CIRCLE RIDGE CT	CIRCLE RIDGE DR	NORTH END	DEVON RIDGE	DUPAGE	98.8	2020	Resurface					1988
DEVON RIDGE CT	CIRCLE RIDGE DR	SOUTH END	DEVON RIDGE	DUPAGE	98.8	2020	Resurface					1988
LAKE RIDGE DR	LAKE RIDGE CT	81ST ST	LAKE RIDGE	DUPAGE	98.8	2020	Resurface					1981
81ST ST	MADISON ST	LAKE RIDGE DR	LAKE RIDGE CLUB	DUPAGE	98.8	2020	Resurface					1956
90TH ST	MADISON ST	VILLAGE LIMITS	90TH STREET	DUPAGE	99		Township					
81ST ST	GARFIELD AVE	PARK AVE	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
81ST ST	GARFIELD AVE	GARFIELD AVE	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
GARFIELD AVE	81ST ST	83RD ST	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
GARFIELD AVE	79TH ST	PINE TREE LN	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
GARFIELD AVE	PINE TREE LN	81ST ST	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
KATHRYN CT	83RD ST	PARK AVE	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1970
PARK AVE	KATHRYN CT	83RD ST	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1972
PARK AVE	81ST ST	KATHRYN CT	BRAEMOOR ESTATES	DUPAGE	99	2021	Resurface					1972
BENNACOTT LN	DOLFOR COVE	EAST END	BRAEMOOR, UNITS 1 & 2	DUPAGE	99	2021	Resurface					1972
PARK AVE	KIRKWOOD COVE	TAMERTON PKWY	BRAEMOOR, UNITS 1 & 2	DUPAGE	99	2021	Resurface					1970
PARK AVE	TAMERTON PKWY	LAKEWOOD CIR	BRAEMOOR, UNITS 1 & 2	DUPAGE	99	2021	Resurface					1970
PARK AVE	83RD ST	KIRKWOOD COVE	BRAEMOOR, UNITS 1 & 2	DUPAGE	99	2021	Resurface					1970

2021 Street Survey (Partially Updated)

ROADWAY	FROM	TO	SUBDIVISION OR STREET GROUP	COUNTY	PCR	RECENT REHAB YEAR	RECENT REHAB TYPE	PREVENT MAINT YEAR	PREVENT MAINT TYPE	PROJ REHAB YEAR	PROJECTED REHAB TYPE	YEAR CONST.
DARTMOUTH CT	ELM ST	WEST END	DARTMOUTH COURT	DUPAGE	99	2021	Resurface					2006
HEATHER CT	LAKEWOOD CIR	NORTH END	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1972
HEATHER DR	87TH ST	LAKEWOOD CIR	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1977
LAKEWOOD CIR	PARK AVE	HEATHER DR	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1977
LAKEWOOD CIR	WEDGEWOOD DR	PARK AVE	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1977
WEDGEWOOD DR	LAKEWOOD CIR	NORTH END	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1977
WEDGEWOOD DR	87TH ST	LAKEWOOD CIR	LAKEWOOD CIRCLE	DUPAGE	99	2021	Resurface					1977
ERIN LN	GARYWOOD DR	WEST END	LONGFIELD HILL	COOK	99	2020	Resurface					1987
HAMILTON AVE	79TH ST	HIGHLAND CT	OLD OAK HIGHLANDS	DUPAGE	99	2021	Resurface					2006
HAMILTON AVE	HIGHLAND CT	OLD OAK CT	OLD OAK HIGHLANDS	DUPAGE	99	2021	Resurface					2006
HIGHLAND CT	HAMILTON AVE	WEST END	OLD OAK HIGHLANDS	DUPAGE	99	2021	Resurface					2006
OLD OAK CT	HAMILTON AVE	WEST END	OLD OAK HIGHLANDS	DUPAGE	99	2021	Resurface					2006
GLENN DR	SHEPHARD LN	94TH ST	SPACE VALLEY	DUPAGE	99	2018	Resurface	2021	Cracksealing			1982
82ND ST	MADISON ST	EAST END	82ND STREET	DUPAGE	100	2022	Resurface					1956
89TH ST	STAFFORD LIMIT	EAST END	89TH STREET	DUPAGE	100	2022	Resurface					1964
CABERNET CT	COUNTY LINE RD	WEST END	CABERNET	DUPAGE	100	2022	Resurface					2003
GRANT CT	GRANT ST	WEST END	GRANT COURT	DUPAGE	100	2022	Resurface					2001
LEE CT	SHADY LN	SOUTH END	KAY	COOK	100	2022	Resurface					2001
LONGWOOD DR	COUNTY LINE RD	EAST END	LONGWOOD	COOK	100	2022	Resurface					1990
89TH ST	MADISON ST	STAFFORD LIMIT	STAFFORD OF BURR RIDGE	DUPAGE	100	2022	Resurface					2008
60TH PL	GARFIELD AVE	WOOD CREEK DR	WOODCREEK	DUPAGE	100	2022	Resurface					1987
WOODCREEK CT	WOOD CREEK DR	NORTH END	WOODCREEK	DUPAGE	100	2022	Resurface					1987
WOODCREEK DR	60TH PL	WOOD CREEK CT	WOODCREEK	DUPAGE	100	2022	Resurface					1987
WOODCREEK DR	WOOD CREEK CT	GRANT ST	WOODCREEK	DUPAGE	100	2022	Resurface					1987