

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 14, Township 39, Range 24, 4th P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:

Found a cast iron monument.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 150556.32

Easting= 401512.93

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

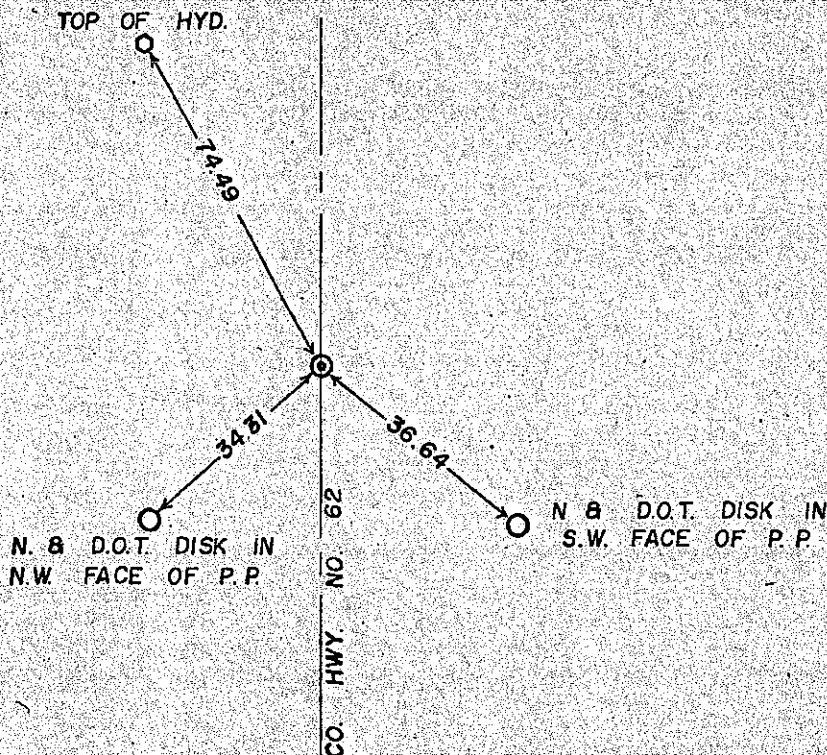

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest L. Reed 1-1-13
Signature Date

Registration No. Miss No. 9808

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20____

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

Original Government post was set on September 20, 1855 by U.S. Deputy Surveyor Silas Barnard and 2 bearing trees noted as:

8" Basswood bearing South 20°East at 30 links

12" White Oak bearing West at 50 links

All of the original bearing trees are now gone.

In 1982, M.B. Rude found a cast iron monument at the corner and a cast iron monument at the 1/16 corner between this corner and the northeast corner of Section 14 which he verified by measurements. This location also fits the existing platting in the Northeast Quarter of Section 14.

The cast iron monument was most likely set by M.H.D. and has long been accepted as the corner. EG Rud and Sons established Kanabec County coordinates on this corner in 2004.