

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

3824061

WEST QUARTER Corner of Section 12, Township 38, Range 24, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:
On 05/ /2004 Found a Kanabec County Monument.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 124438.648

Easting= 401419.406

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

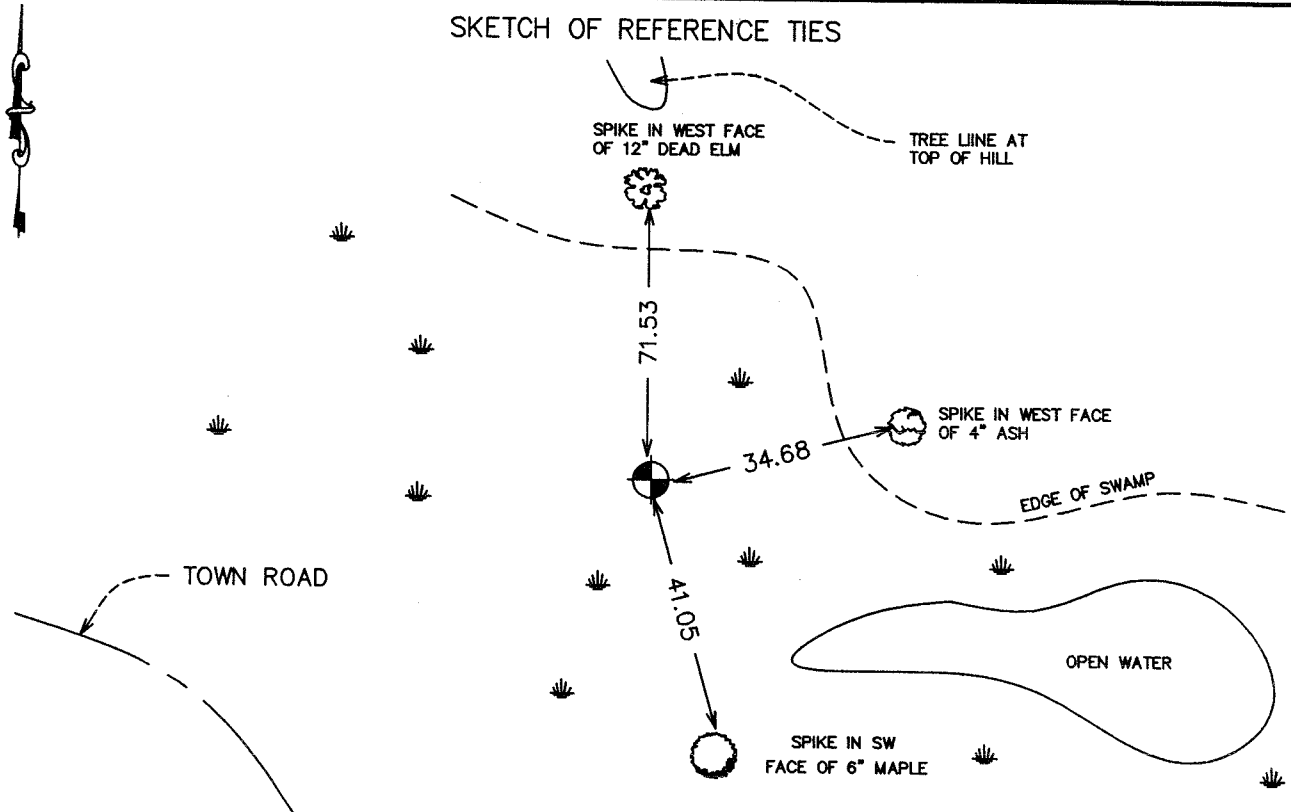

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Reed
Signature

6-14-2004
Date

Registration No. 9808

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the

_____ day of _____ A.D., 20__

County Recorder _____

BY _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE
(FROM TIE SHEET 971)

Research at the County Surveyor's Office revealed that in June of 1970, N. C. Hoium, L.S., set a 1" x 4' iron pipe in the swamp. On July 20 and 27, Otto Associates did an initial search of the area and found that the ties were gone.

We contacted Mr. Hoium and obtained his measurements to other government corners in Section 11. Through field traverse, we tied into these other monuments in Section 11 and surveyed into the position for the corner. In this process, we recovered the 1" x 4' pipe which was layed over. We straightened it up and find that this position checks very closely with the dimensions that Hoium had.

Based upon the foregoing evidence, I have accepted the position of the straightened 1" pipe as the best evidence as to the location of the West Quarter corner of Section 12, took new ties and filed this report.

(2004)

In May 2004, E.G. Rud ran a survey around Sections 8, 9, 10, & 11. We found the iron in the swamp as set by Hoium. This pipe fit the dimensions measured by Ed Otto. We accepted this pipe and established Kanabec County Coordinates using G.P.S. equipment.