


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 23, Township 42, Range 24, 4TH P.M.  
STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:  
FOUND A 7/8 INCH BY 24 INCH REBAR WITH CAP.

Kanabec County U.S. Survey Feet Coordinates  
NAD 1983, HARN 1996 Adjustment  
Obtained by RTK GPS Observation  
Northing= 238309.67  
Easting= 391922.92  
Note: NAD 1983, HARN 1996 Adjustment  
coordinates are NOT compatible with  
NAD 1983 coordinates  
Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

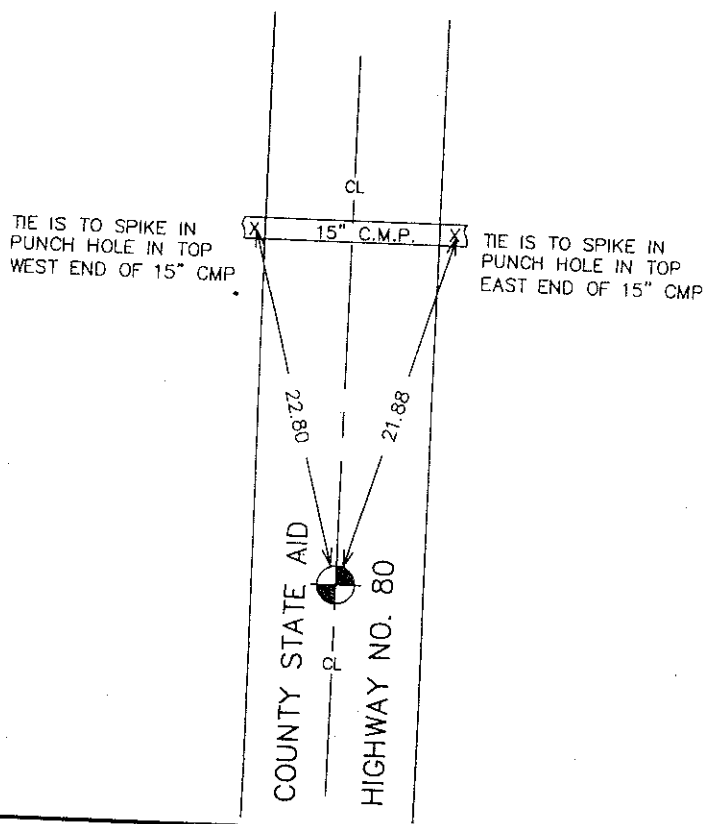

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Ernst Blud* 2-07-2008  
Signature Date

Registration No. 9808

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

## OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_  
I hereby certify that this document was filed in the County Recorder's office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_  
County Recorder \_\_\_\_\_  
BY \_\_\_\_\_ Deputy  
DOCUMENT NO. \_\_\_\_\_

EAST QUARTER CORNER SECTION 23, TOWNSHIP 42, RANGE 24

**STATEMENT OF EVIDENCE**

ALL OF THE ORIGINAL BEARING TREES ARE NOW GONE. THERE IS NO RE-SURVEY DATA ON FILE FOR THIS CORNER.

THERE IS A TOWN ROAD ORDER ON FILE DATES NOVEMBER OF 1901, FOR A ROAD STARTING AT THE EAST QUARTER CORNER OF SECTION 26 AND RUNNING NORTH ON THE SECTION LINE BETWEEN SECTIONS 26 AND 25, 23 AND 24, 13 AND 14 TO THE EAST QUARTER CORNER OF SECTION 14.

IN APRIL OF 1988, M.B. RUDE RAN A SURVEY AROUND SECTIONS 23, 26, AND 35, TOWNSHIP 42, RANGE 24 TO LOCATE THE EXISTING MONUMENTS, LINES OF OCCUPATION AND SEARCH AREAS.

THERE IS AN EXISTING NORTH-SOUTH ROAD AT THIS CORNER LOCATION IN A SWAMP AND THERE ARE NO LINES OF OCCUPATION EAST OR WEST.

NO EXCAVATION WAS MADE AS THE EVIDENCE WOULD HAVE BEEN DESTROYED IN ROAD CONSTRUCTION.

THIS CORNER WAS SET IN THE CENTERLINE OF THE EXISTING NORTH-SOUTH ROAD PER THE TOWN ROAD ORDER AND AT A PROPORTIONAL DISTANCE BETWEEN THE EAST QUARTER CORNER OF SECTION 26 AND THE NORTHEAST CORNER OF SECTION 23.

IN 2006 E.G. RUD & SONS, INC. ESTABLISHED KANABEC COUNTY COORDINATES ON THIS POSITION USING GLOBAL POSITIONING SYSTEM (G.P.S.) EQUIPMENT.