

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33, Township 38, Range 25, 4TH P.M.
STATE OF MINNESOTA, County of KANABEC


At the corner location shown on the sketch:
SET A #7 REBAR WITH AN ALUMINUM CAP.

Kanabec County U.S. Survey Feet Coordinates
NAD 1983, HARN 1996 Adjustment
Obtained by RTK GPS Observation


Northing= 106983.35
Easting= 356596.72

Note: NAD 1983, HARN 1996 Adjustment
coordinates are NOT compatible with
NAD 1983 coordinates
Note: 1 Meter=3937/1200 U.S. Survey Feet

SKETCH OF REFERENCE TIES

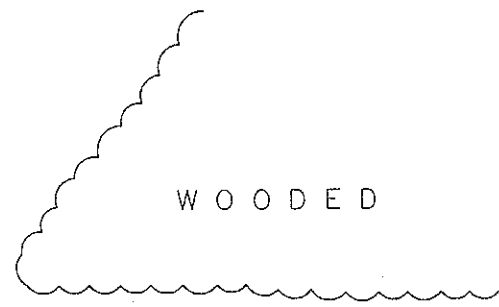

C/L OF 110TH AVE. (GRAVEL)



Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Paul
Signature

12-21-2010
Date

Registration No. 9808

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorder's office at _____ M. on the _____ day of _____ A.D., 20____

County Recorder _____
BY _____ Deputy

DOCUMENT NO. _____

N1/4 CORNER, SEC. 33, T38, R25

STATEMENT OF EVIDENCE

THE ORIGINAL CORNER POST WAS SET BY DEPUTY SURVEYOR DANIEL HIGBEE ON NOV. 24, 1851 AND 2 BEARING TREES ESTABLISHED AS FOLLOWS:

8" TAMARACK BEARING N65°W @ 9 LINKS

8" TAMARACK BEARING S58°E @ 16 LINKS

NO VISIBLE EVIDENCE COULD BE FOUND FOR THE POST OR BEARING TREES..

ON PAGE 140 OF BOOK A1 OF SURVEYS CHARLES HANDSCHU RECORDED A SURVEY OF SEC. 28. DONE IN DEC. 1931. THIS SURVEY SHOWS A POST AT THE S1/4 CORNER OF SEC. 28.

RANDY MEHRWERTH, OWNER OF LAND IN THE SW1/4 AND SE1/4 OF SEC. 28 WAS CONTACTED AND TOOK US TO WHERE HE BELIEVED THE CENTER OF SEC. 28 TO BE. THIS WAS AT THE INTERSECTION OF FENCE LINES RUNNING NORTH-SOUTH AND EAST-WEST. A SEARCH WAS MADE IN THIS AREA AND A 3/4" PIPE WAS FOUND. WE ESTABLISHED A POSITION ON THIS PIPE AND EXTENDED A LINE SOUTHERLY FROM THE N1/4 CORNER OF SEC. 28 AND SET A POINT ON THE CENTERLINE OF 110TH AVE.

NEIL WESTLING, OWNER OF LAND IN THE SW1/4 OF SEC. 33, WAS CONTACTED AND HIS FATHER AND GRANDFATHER HAD OWNED THE LAND PRIOR TO HIM. HE STATED THE FENCE ON THE EAST SIDE OF HIS PROPERTY WAS ALWAYS BELIEVED TO BE THE SEC. LINE. THIS FENCE FELL 4 FEET WEST OF OUR POINT.

NO EXCAVATION WAS MADE AS A LARGE DRAINAGE DITCH WAS ON THE NORTH SIDE OF THE ROAD AND ANY CORNER SET WOULD HAVE BEEN REMOVED.

WE SET A #7 REBAR WITH AN ALUMINUM CAP, TIES WERE TAKEN AND KANABEC COUNTY COORDINATES WERE ESTABLISHED ON THIS POSITION.