

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 12, Township 40, Range 23, 4TH P.M.

STATE OF MINNESOTA, County of KANABEC

At the corner location shown on the sketch:  
SET REBAR WITH ALUMINUM CAP  
AND ESTABLISHED G.P.S. COORDINATES ON ITS LOCATION.

Kanabec County U.S. Survey Feet Coordinates  
NAD 1983, HARN 1996 Adjustment  
Obtained by RTK GPS Observation


Northing= 190298.833

Easting= 435633.902

Note: NAD 1983, HARN 1996 Adjustment  
coordinates are NOT compatible with  
NAD 1983 coordinates

Note: 1 Meter=3937/1200 U.S. Survey Feet

## SKETCH OF REFERENCE TIES

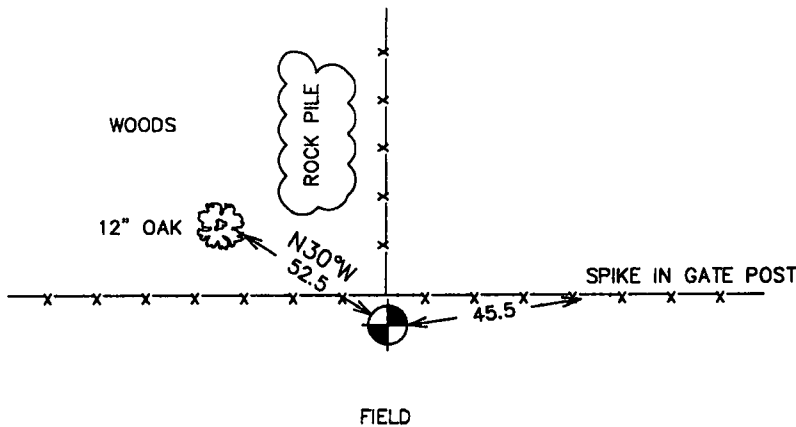

TIES ARE TO A SPK. IN  
BLAZE IN NEAR FACE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ernest J. Rud 8-22-2006  
Signature Date

Registration No. Miss No. No.

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

## OFFICE OF THE COUNTY RECORDER

County of Kanabec

I hereby certify that this document was filed in the County Recorder's office at 10:00 AM on the

23rd day of August A.D., 2006

County Recorder Rhonda A Olson

BY \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

NORTH QUARTER CORNER SECTION 12, T40, R23

**STATEMENT OF EVIDENCE**

THE ORIGINAL CORNER WAS SET BY DEPUTY SURVEYOR JOHN M. GLEY ON SEPT. 29, 1851. NO EVIDENCE FOR THE CORNER OR BEARING TREES NO LONGER REMAIN.

NO RECORDS OF ANY SUBSEQUENT SURVEYS COULD BE FOUND AT THE COUNTY COURT HOUSE.

IN JUNE 2006 WE RAN A SURVEY AROUND SECTIONS 1, 2, 11, AND 12 TO LOCATE EXISTING MONUMENTATION AND LINES OF OCCUPATION.

THIS CORNER FALLS AT THE INTERSECTION OF AN EAST-WEST FENCE AND A FENCE GOING NORTH. WE PROBED AROUND THE FENCE AND FOUND NO CORNERS OR EVIDENCE. WE SET A #7 REBAR WITH AN ALUMINUM CAP JUST SOUTH OF THE FENCE CORNER. THIS WAS IN HARMONY WITH LYLE PETERSON'S TESTIMONY WHO OWNS LAND IN W1/2 AND E1/2 OF SECTION 1.

WE TOOK TIES AND ESTABLISHED COUNTY COORDINATES ON THE MONUMENT USING G.P.S. EQUIPMENT.